

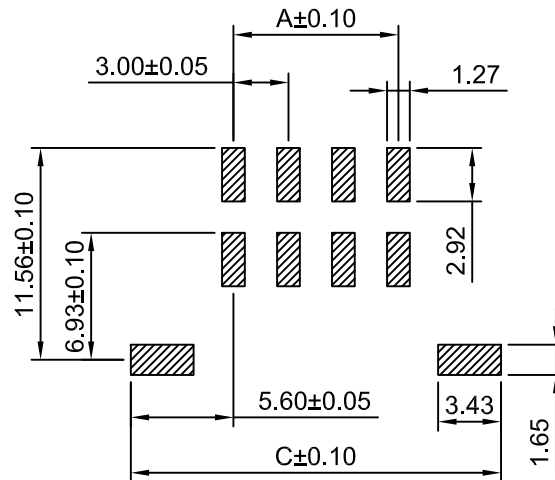
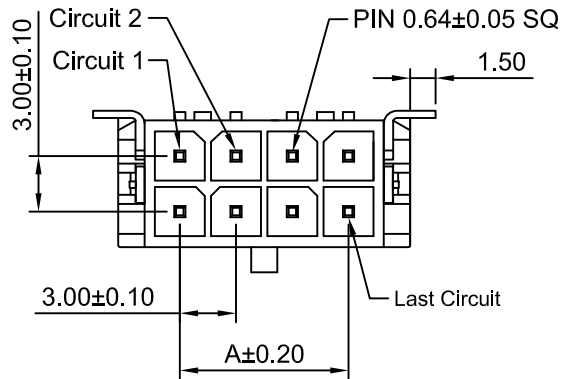


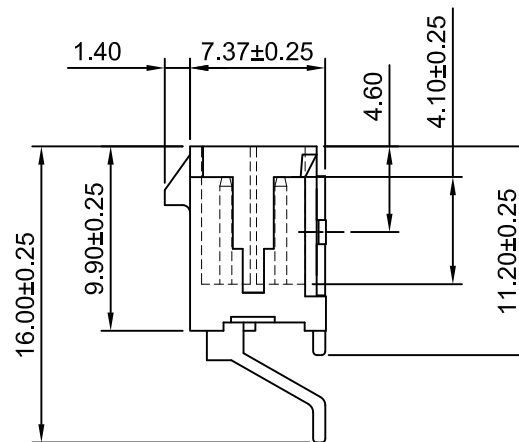

P.C.B LAYOUT

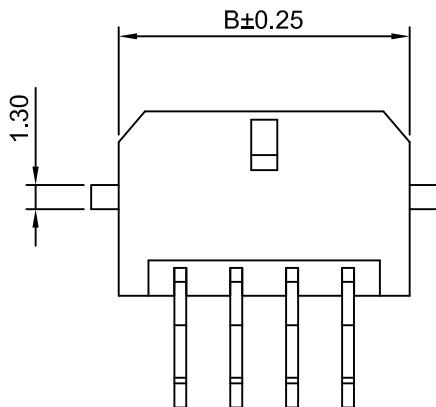

Ordering Information:

C3030WR-S-2xXP - *** - ***

1 2 3

1.Part No.

2.Material:

(blank):LCP,UL94V-0

GWT:LCP,UL94V-0,GWT 750°C

3.Finish:

(blank):Tin over Nickel

G:Gold over Nickel(1"U)

G3:Gold over Nickel(3"U)

G15:Gold over Nickel(15"U)

G30:Gold over Nickel(30"U)

SPECIFICATIONS:

Current Rating: 8.5A AC,DC (AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: LCP,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x1P	---	6.65	11.20	2x7P	18.00	24.65	29.20
2x2P	3.00	9.65	14.20	2x8P	21.00	27.65	32.20
2x3P	6.00	12.65	17.20	2x9P	24.00	30.65	35.20
2x4P	9.00	15.65	20.20	2x10P	27.00	33.65	38.20
2x5P	12.00	18.65	23.20	2x11P	30.00	36.65	41.20
2x6P	15.00	21.65	26.20	2x12P	33.00	39.65	44.20

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

A6	CHANGE THE DRAWING	2023.04.11	Unit	Scale	Sheet	TITLE 3.00mm PITCH RIGHT-ANGLE Dual Row WAFER - SMD TYPE		
A5	CHANGE THE DRAWING	2022.11.07	mm	2.5:1	1 of 1			
A4	CHANGE THE DRAWING	2022.01.17	DRAWN	CHK'D	APPR	DRAWING NO. C3030WR-S-2xXP		
A3	CHANGE THE DRAWING	2021.12.22	Chengbiao Ye	DianKui Wan	Jack Yin			
A2	CHANGE THE Current Rating	2018.12.19	General Tolerances		THIRD ANGLE PROJECTION		REV A6	
A1	Update drawings	2011.12.14	x.xx±0.25 x.xxx±0.20 x.xxxx±0.15					
A0	NEW RELEASE	2009.05.10	ANGLES ±1°					
REV	DESCRIPTION	DATE						