

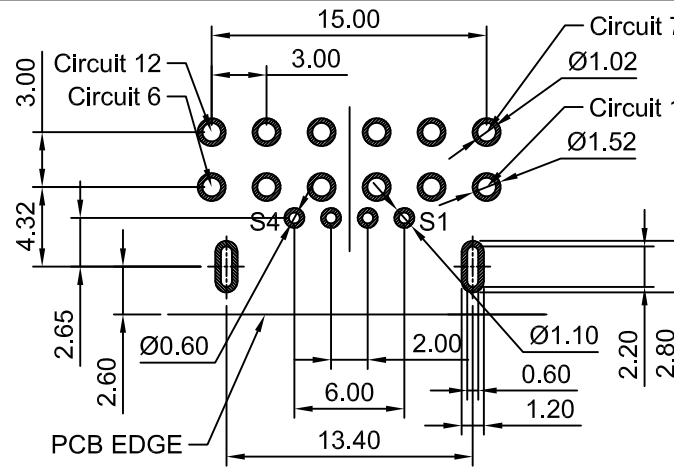
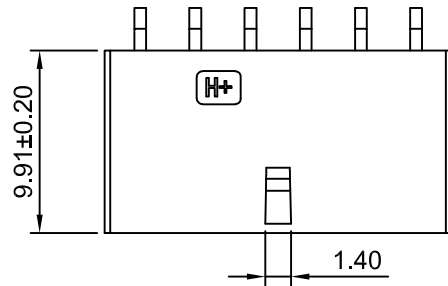
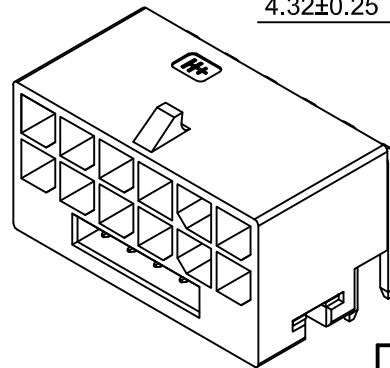


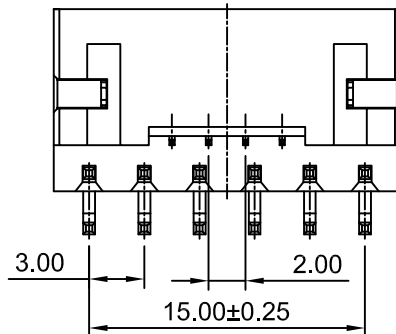

P.C.B LAYOUT
TOLERANCE:±0.05

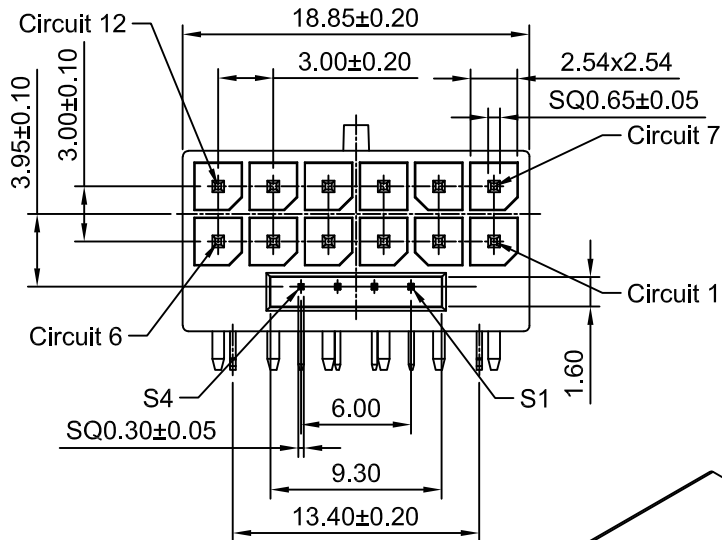

Ordering Information:
C3030WRE-F-2x6P - ***
1 2

1.Part NO.

2.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel (Au:1u"Mating area)

G10: Gold over Nickel (Au:10u"Mating area)

G15: Gold over Nickel (Au:15u"Mating area)

G30: Gold over Nickel (Au:30u"Mating area)

SPECIFICATIONS:

Current Rating: 9.5A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

PIN Material: Copper Alloy/Tin over Nickel

Solder tabs: Brass/Tin over Nickel

Material: Nylon 9T,UL94V-0(Black)

PIN SIGNAL	PIN NO.
PWR PIN	1~6
GND PIN	7~12
S1	CARD_PWR_STABLE
S2	CARD_CBL_PRES#
S3	SENSEO
S4	DO NOT USF

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2.5:1	1 of 1	3.00mm PITCH RIGHT-ANGLE DUAL ROW PCI-SIG 12VHPWR H+ BOX HEADER
DRWN	CHK'D	APPR	DRAWING NO.
Wenmin Luo	Diankui Wan	Jack Yin	C3030WRE-F-2x6P
General Tolerances			THIRD ANGLE PROJECTION
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			
A0	NEW RELEASE	2022.03.30	REV A0
REV	DESCRIPTION	DATE	