

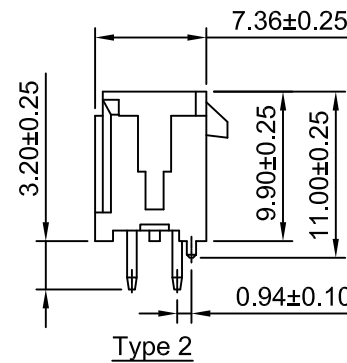
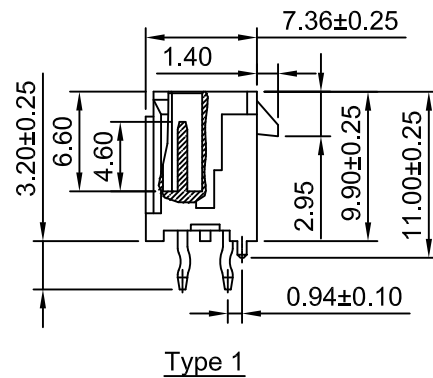
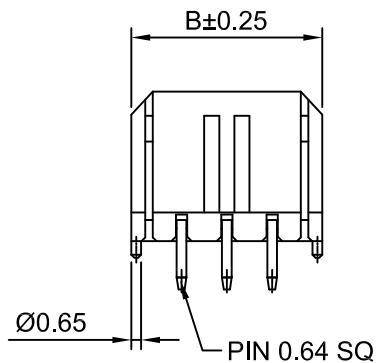
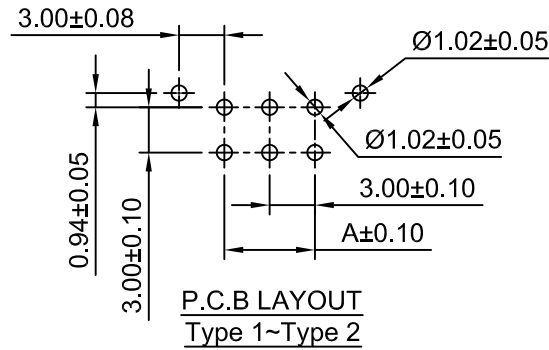
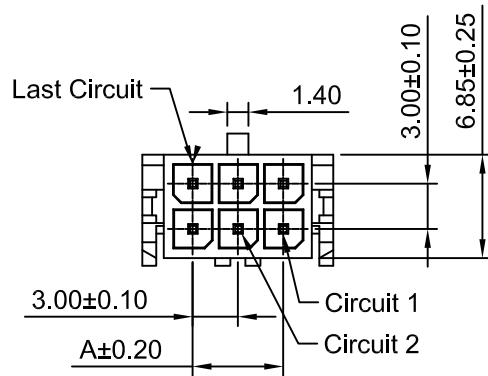
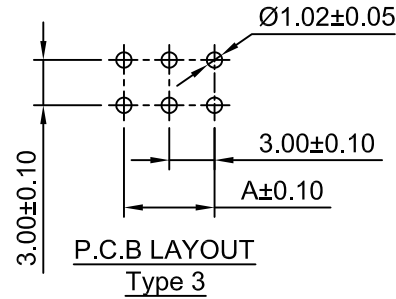


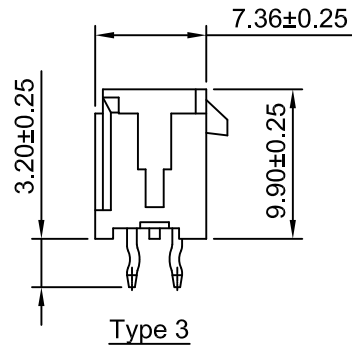

Ordering Information:
C3030WV-2xXP - *** - *** - HCS - ***
1 2 3 4

- 1.Part NO.
2.Style:
(Blank):Type 1
2:Type 2
3:Type 3
3.Material:
(Blank):Nylon 66 UL94V-0(Black)
LCP:LCP UL94V-0(Black)
GWT:Nylon 66,UL94V-0(Black),IEC 60335-1,5th
Edition Glow Wire Capable.
4.Finish:
(Blank): Tin over Nickel
G: Gold over Nickel(Au:1u")
G3: Gold over Nickel(Au:3u")
G15: Gold over Nickel(Au:15u",Mating Area)
G30: Gold over Nickel(Au:30u",Mating Area)



SPECIFICATIONS:
Current Rating: 12.5A AC,DC (MAX)
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Copper Alloy

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	—	6.65	2x7P	18.00	24.65
2x2P	3.00	9.65	2x8P	21.00	27.65
2x3P	6.00	12.65	2x9P	24.00	30.65
2x4P	9.00	15.65	2x10P	27.00	33.65
2x5P	12.00	18.65	2x11P	30.00	36.65
2x6P	15.00	21.65	2x12P	33.00	39.65

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 2	3.00mm Pitch VERTICAL DUAL ROW DIP WAFER	
DRAWN	CHK'D	APPR		
Haisen Li	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			C3030WV-2xXP-HCS	
A4	CHANGE THE DRAWING	2022.09.09	THIRD ANGLE PROJECTION	
A3	CHANGE THE DRAWING	2022.04.14		
A2	CHANGE THE DRAWING	2022.01.15		
A1	CHANGE THE Current Rating	2018.12.24		
A0	NEW RELEASE	2009.05.10	REV A4	
REV	DESCRIPTION	DATE		