

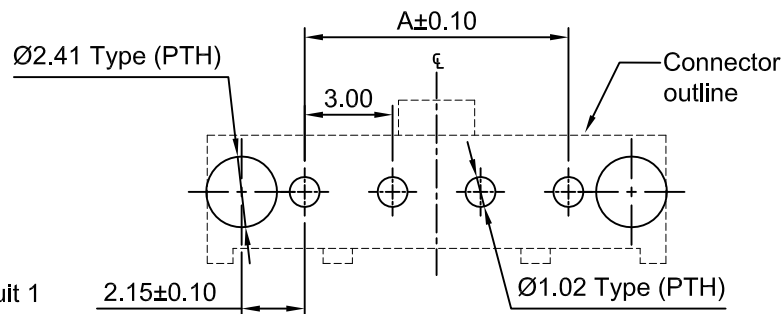
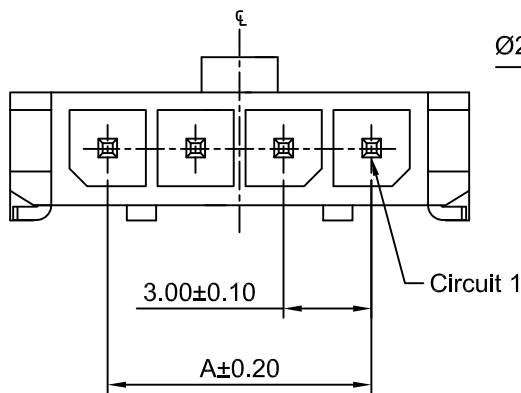


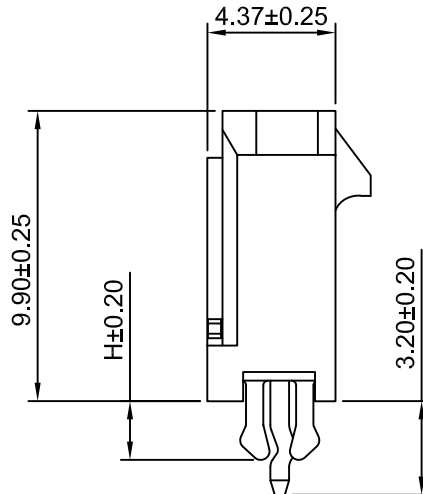

P.C.B LAYOUT
TOLERANCE:±0.05

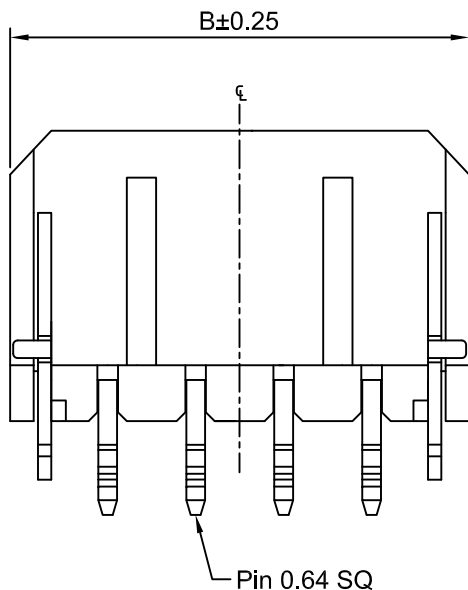

Ordering Information:

C3030WV-F-XP - *** - *** - ***
1 2 3 4

1.Part NO.

2.Size(H):

(Blank):2.00mm

H30:3.00mm

H34:3.40mm

3.Material:

(Blank):Nylon 9T UL94V-0

LCP:LCP UL94V-0

GWT:Nylon 9T UL94V-0,GWT 750°C

4.Finish:

(Blank):Tin over Nickel

G:Gold over Nickel(Au:1u")

G3:Gold over Nickel(Au:3u",mating area,Tin-plated,other area)

G15:Gold over Nickel(Au:15u",mating area,Tin-plated,other area)

G30:Gold over Nickel(Au:30u",mating area,Tin-plated,other area)

SPECIFICATIONS:

Current Rating: 8.5A AC,DC (AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material:Brass/Tin over Nickel

Material: Nylon 9T,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.00	9.65	8P	21.00	27.65
3P	6.00	12.65	9P	24.00	30.65
4P	9.00	15.65	10P	27.00	33.65
5P	12.00	18.65	11P	30.00	36.65
6P	15.00	21.65	12P	33.00	39.65
7P	18.00	24.65			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

A5	CHANGE THE DRAWING	2023.04.20
A4	CHANGE THE DRAWING	2022.01.14
A3	MODIFY DRAWING	2021.06.22
A2	CHANGE THE Current Rating	2018.12.26
A1	CHANGE THE DRAWING	2018.01.10
A0	NEW RELEASE	2014.06.20
REV	DESCRIPTION	DATE

	Unit	Scale	Sheet
0	mm	4:1	1 of 1
4	DRAWN	CHK'D	APPR
2	Chengbiao Ye	Diankui Wan	Jack Yin
6	General Tolerances		THIRD ANGLE PROJECTION
0	x,x±0.25		
0	x,x±0.20		
	x,xxx±0.15		
	ANGLES ±1°		

TITLE		
3.00mm PITCH VERTICAL SINGLE ROW WAFER		
DRAWING NO.		REV
C3030WV-F-XP		A5