
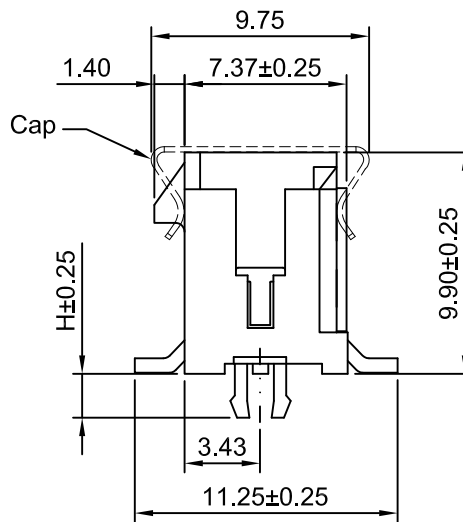
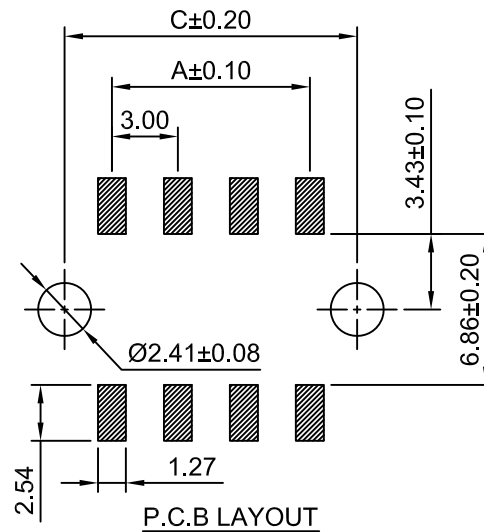
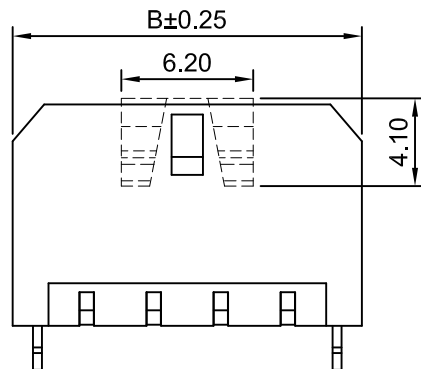


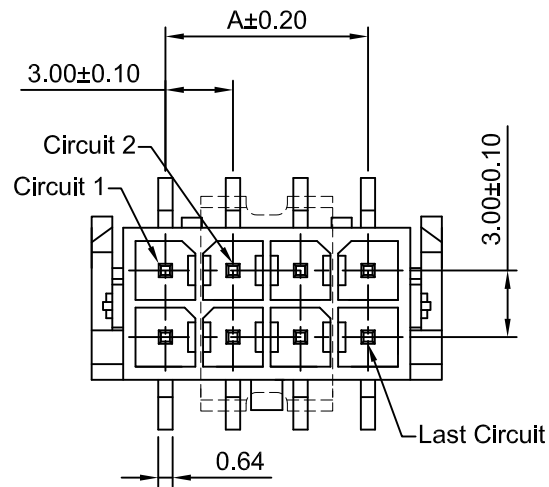

Ordering Information:
C3030WV-S-F-2xXP - *** - *** - ***
1 2 3 4

- Part No.
- Size(H):
(blank):2.00mm
H30:3.00mm
- Material:
(blank):LCP UL94V-0
GWT:LCP UL94V-0,GWT 750°C
- Finish:
(blank):Tin over Nickel
G:Gold over Nickel(1"U)
G3:Gold over Nickel(3"U)
G15:Gold over Nickel(15"U)
G30:Gold over Nickel(30"U)

SPECIFICATIONS:

Current Rating: 12.5A AC,DC (AWG #18)
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: LCP,UL94V-0(Black)


Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x1P	-----	6.65	4.30	2x7P	18.00	24.65	22.30
2x2P	3.00	9.65	7.30	2x8P	21.00	27.65	25.30
2x3P	6.00	12.65	10.30	2x9P	24.00	30.65	28.30
2x4P	9.00	15.65	13.30	2x10P	27.00	33.65	31.30
2x5P	12.00	18.65	16.30	2x11P	30.00	36.65	34.30
2x6P	15.00	21.65	19.30	2x12P	33.00	39.65	37.30


CJTconn

CHANGJIANG CONNECTORS CO.,LTD.


Unit		Scale		Sheet		TITLE	
mm		3:1		1 of 2			
DRWN		CHK'D		APPR		3.00mm PITCH VERTICAL DUAL ROW WAFER - SMT TYPE	
Chengbiao Ye		DianKui Wan		Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO.			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°							
C3030WV-S-F-2xXP							




2x1P




2x2P




2x3P




2x4P




2x5P




2x6P

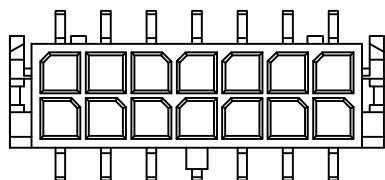


2x7P

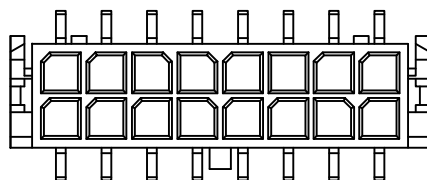


2x8P

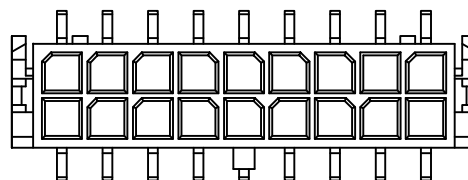


2x9P

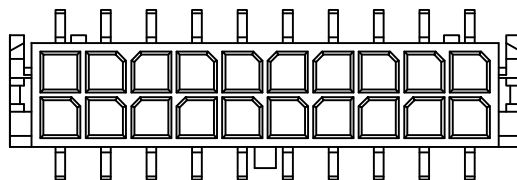

2x10P

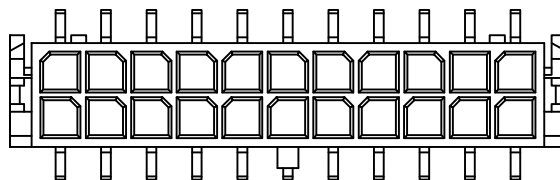

2x11P

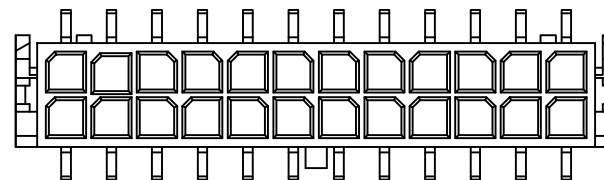

2x12P

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	3:1	2 of 2	3.00mm PITCH VERTICAL DUAL ROW WAFER - SMT TYPE	
DRWN	CHKD	APPR		
Chengbiao Ye	DianKui Wan	Jack Yin	DRAWING NO.	
General Tolerances			C3030WV-S-F-2xXP	
A1	Update drawings	2011.12.14	THIRD ANGLE PROJECTION	
A0	NEW RELEASE	2009.05.10		
REV	DESCRIPTION	DATE	REV A4	