
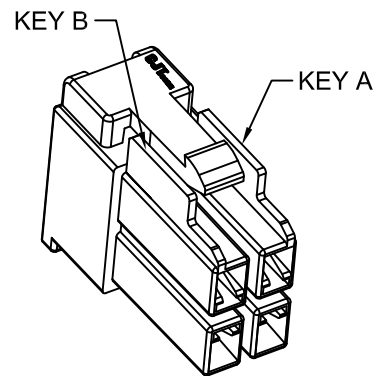


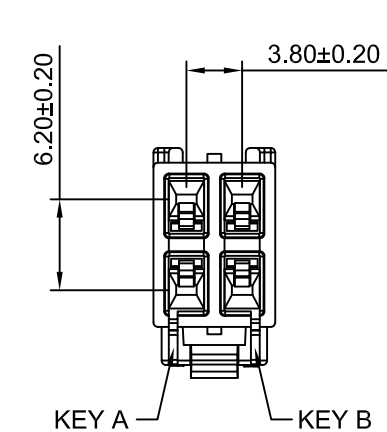

#### Ordering Information:

A3962HF-2x2P - \*\*\*



1 2

1.Part NO.

2.Color:

(blank): White

RD: Red

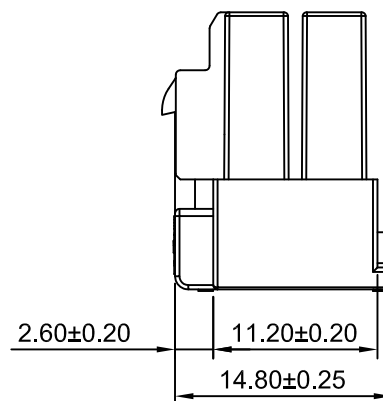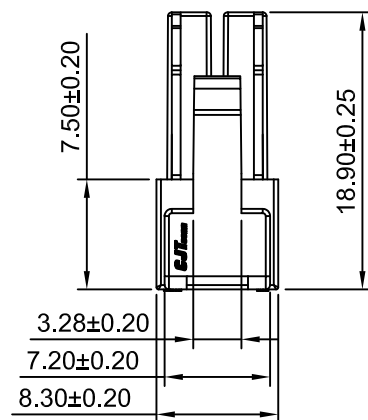

#### SPECIFICATIONS:

Current Rating: 6A AC,DC

Voltage Rating: 300V AC,DC


Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0



**CJTconn**

CHANGJIANG CONNECTORS CO.,LTD.

| Unit                                                 | Scale       | Sheet                  | TITLE                                 |           |
|------------------------------------------------------|-------------|------------------------|---------------------------------------|-----------|
| mm                                                   | 2:1         | 1 of 1                 | 3.80x6.20mm PITCH<br>DUAL ROW HOUSING |           |
| DRWN                                                 | CHK'D       | APPR                   |                                       |           |
| Dengchun Yi                                          | Dlankul Wan | Jack Yin               |                                       |           |
| General Tolerances                                   |             | THIRD ANGLE PROJECTION | DRAWING NO.<br>C3962HF-2x2P           | REV<br>A1 |
| x.xx±0.25<br>x.xxx±0.20<br>x.xxxx±0.15<br>ANGLES ±1° |             |                        |                                       |           |

|     |                    |            |
|-----|--------------------|------------|
| A1  | CHANGE THE DRAWING | 2020.09.18 |
| A0  | NEW RELEASE        | 2020.07.14 |
| REV | DESCRIPTION        | DATE       |