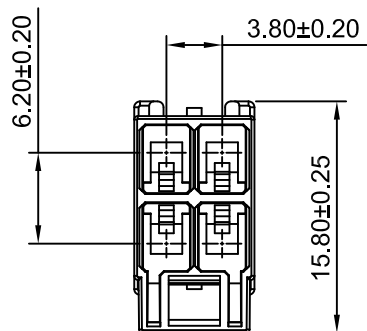


SPECIFICATIONS:

Current Rating: 6A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0 (White)

A2	CHANGE THE DRAWING	2020.11.02
A1	CHANGE THE DRAWING	2020.09.18
A0	NEW RELEASE	2020.07.14
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			TITLE	
Unit	Scale	Sheet	3.80x6.20mm PITCH DUAL ROW HOUSING	
mm	2:1	1 of 1		
DRWN	CHK'D	APPR		
Dengchun Yi	Dianhui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.x±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			C3962HM-2x2P	A2