
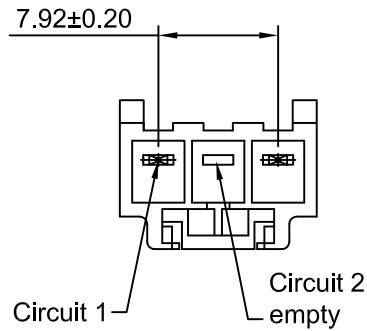

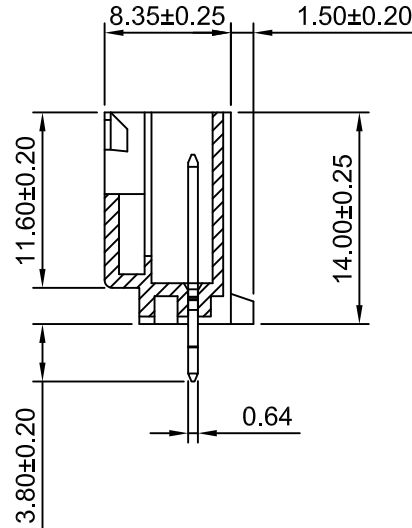


P.C.B LAYOUT

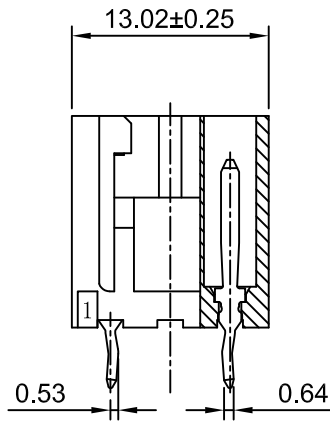

Ordering Information:
C3962WV-3P-A - *** - **
1 2 3

- Part No.
- Material:
(blank):Nylon 66,UL94V-0,GWT 750 °C
GWT850:Nylon 66,UL94V-0,GWT 850 °C
- Color:
(blank):Natural
BK:Black
RD:Red
BL:Blue
YL:Yellow

SPECIFICATIONS:

Current Rating: 6A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material:Brass/Tin over Nickel
Material: Nylon 66+30%GF,UL94V-0,GWT 750 °C (Natural)

Ordering Information & Dimensions

Circuits	HOLE DIA "D"(mm)	
	Drilled	Punched
3P	1.10±0.05	0.95±0.05

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		Title : 3.96mm Pitch 180° Wafer			
mm		2:1		1 of 1					
Draw By:				Approved :					
Diankui Wan				Jack Yin					
3		General Tolerance				DRAW NO : C3962WV-3P-A		REV A2	
9		x.x±0.25		PROJECT					
0		x.xx±0.20							
		x.xxx±0.15							