





Ordering Information:

C3963HF-1P - **
1 2

1.Part No.

2.Material:

- (blank):Natural,Nylon 66 UL94V-0
- BK:Black,Nylon 66 UL94V-0
- RD:Red,Nylon 66 UL94V-0
- YL:Yellow,Nylon 66 UL94V-0
- BL:Blue,Nylon 66 UL94V-0
- GWT:Nylon 66 UL94V-0,GWT 750°C

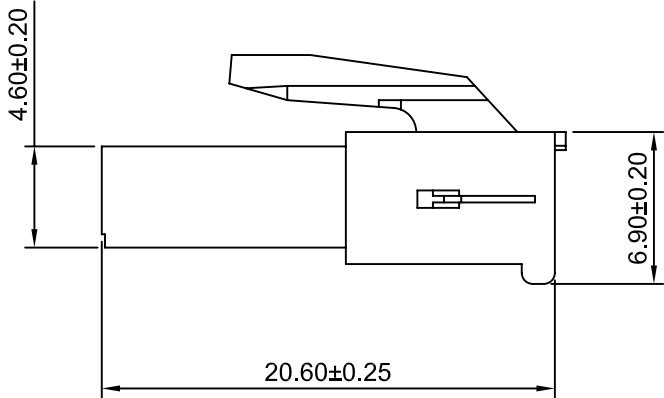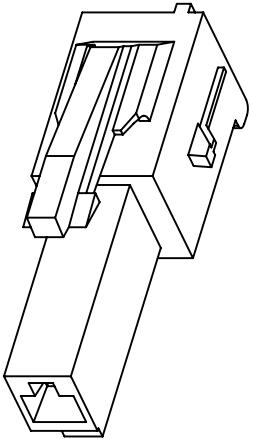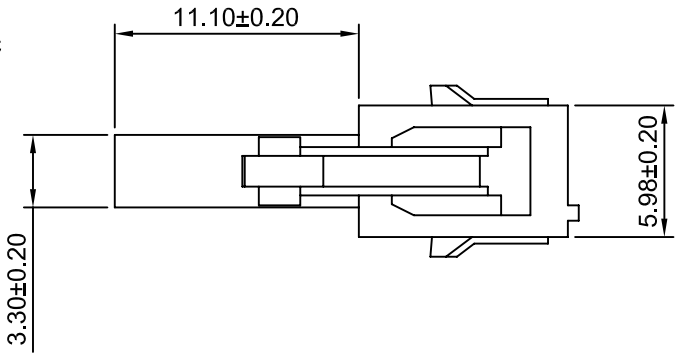

SPECIFICATIONS:

Current Rating: 15A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 3.5mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 5000V AC/minute
Material: Nylon 66,UL94V-0(Natural)

CJTconn			CHANGJIANG CONNECTORS CO.,LTD		
Unit	Scale	Sheet	Title : 3.96mm PITCH HOUSING		
mm	3:1	1 of 1			
Draw By:		Approved :			
LIZQ		GONGYB			
General Tolerance					
x.x±0.25 x.xx±0.20 x.xxx±0.15		PROJECT			
			DRAW NO : C3963HF-1P	REV A0	