

Ordering Information:

C3963HM-1P - **
1 2

1.Part No.

2.Material:

(blank):Natural,Nylon 66 UL94V-0





BK:Black,Nylon 66 UL94V-0

RD:Red,Nylon 66 UL94V-0

YL:Yellow,Nylon 66 UL94V-0

BL:Blue,Nylon 66 UL94V-0

GWT:Nylon 66 UL94V-0,GWT 750°C

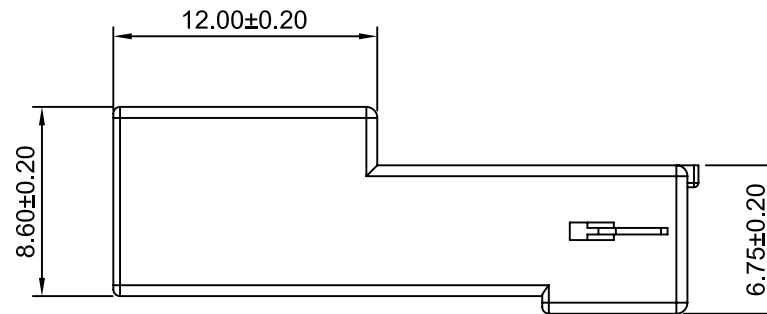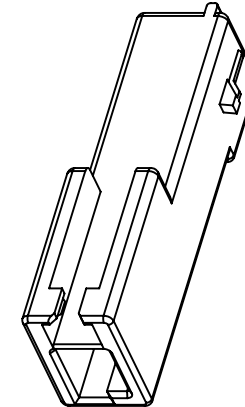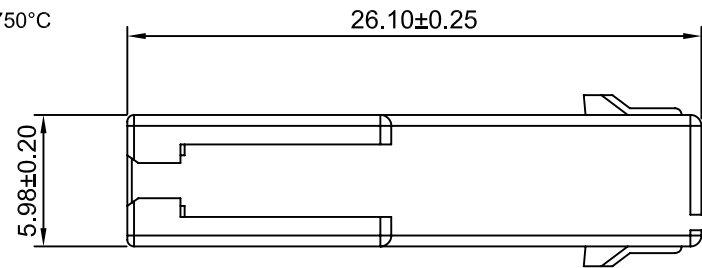

SPECIFICATIONS:

Current Rating: 15A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 3.5mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 5000V AC/minute

Material: Nylon 66,UL94V-0(Natural)

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1

Title :

3.96mm PITCH

Draw BY:	Approved :
LIZQ	GONGYB

HOUSING

General Tolerance

x.x±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	



DRAW NO : C3963HM-1P

REV
A0

A0	NEW RELEASE	2009.05.10
REV	DESCRIPTION	DATE