


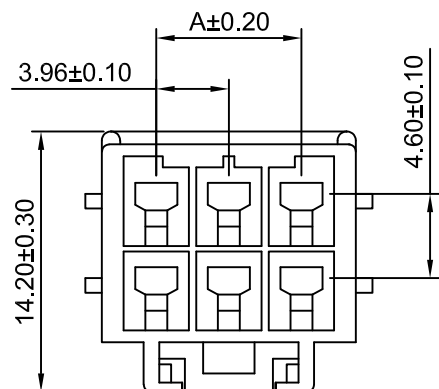
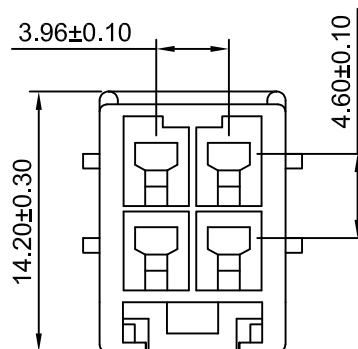
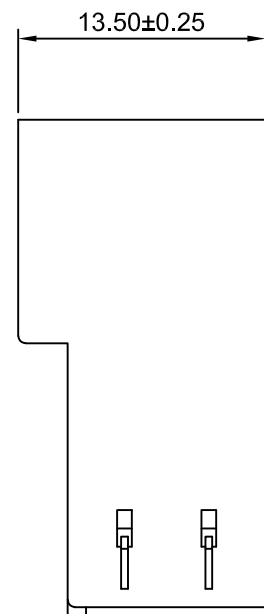


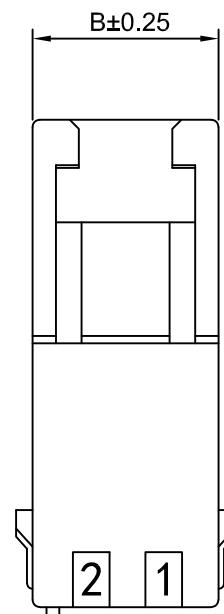

2x3P~2x4P

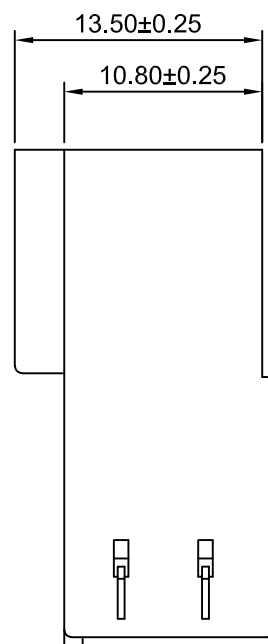

2x2P

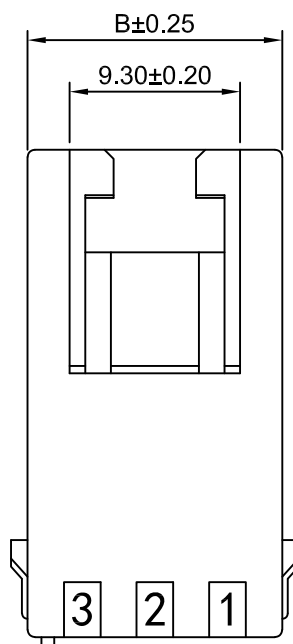

SPECIFICATIONS:

Current Rating: 15A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 3.5mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 5000V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C3963HM-2x2P	3.96	10.15
C3963HM-2x3P	7.92	14.15
C3963HM-2x4P	11.88	18.15

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2.5:1	1 of 1	
DRWN	CHK'D	APPR	
Dengchun Yi	Djankui Wan	Jack Yin	3.96mm PITCH HOUSING
General Tolerances			
x.x±0.25 x.x±0.20 x.xxx±0.15 ANGLES ±1°			DRAWING NO.
THIRD ANGLE PROJECTION			
			REV A1
C3963HM-2xXP			