


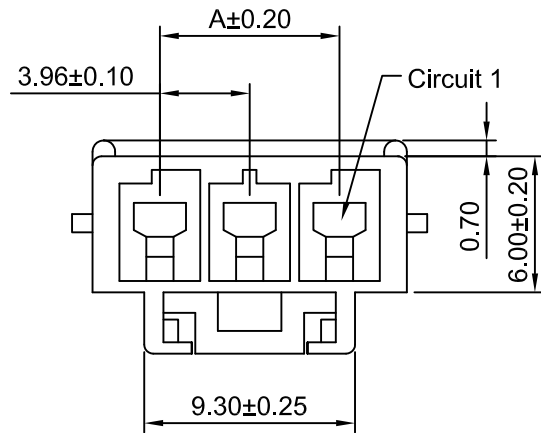


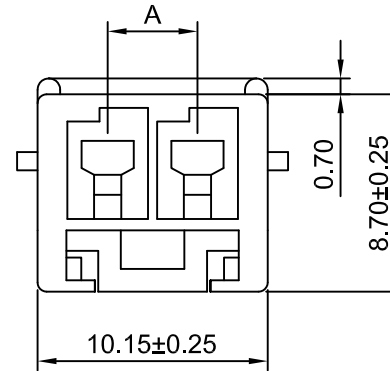

3P

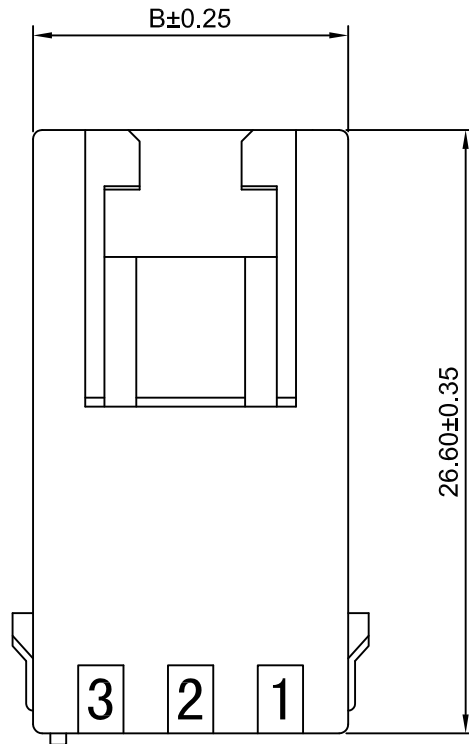

2P

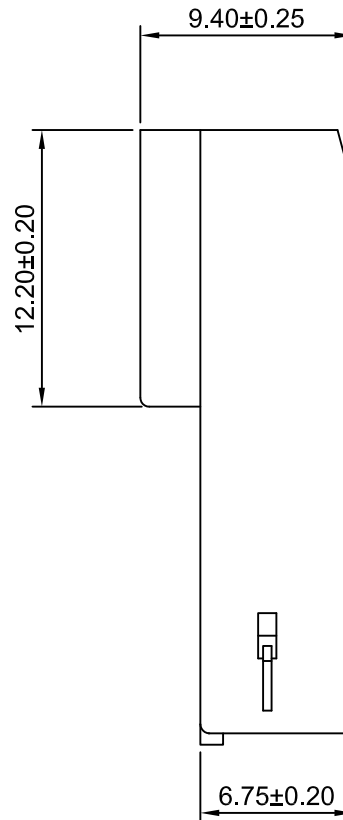

Ordering Information:

C3963HM-XP - **
1 2

1.Part NO.

2.Material:

(blank): Nylon 66,UL94V-0 (White)

GWT: Nylon 66,UL94V-0 (Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

SPECIFICATIONS:

Current Rating:15A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 3.5mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 5000V AC/minute

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	10.15	3P	7.92	14.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 3.96mm PITCH HOUSING	
mm		3:1		1 of 1			
DRWN		CHK'D		APPR			
Dengchun Yi		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO. C3963HM-XP	
1 x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°							
5							
REV		DESCRIPTION		DATE		REV A1	