


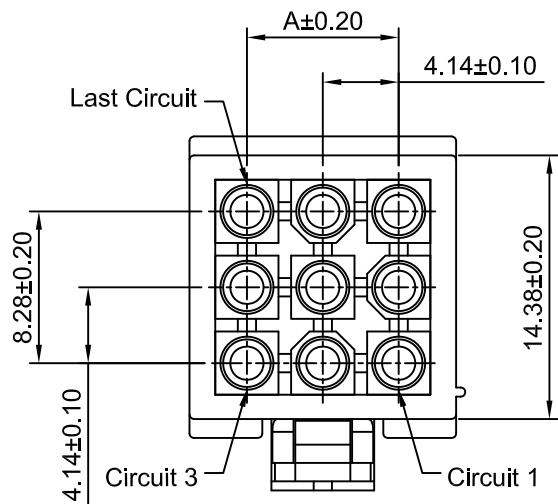

Ordering Information:

C4140HF-3xXP - ***
1 2

1.Part NO.



2.Material:

(Blank): Nylon 66,UL94V-2(Natural)

V0: Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition

Glow Wire Capable.

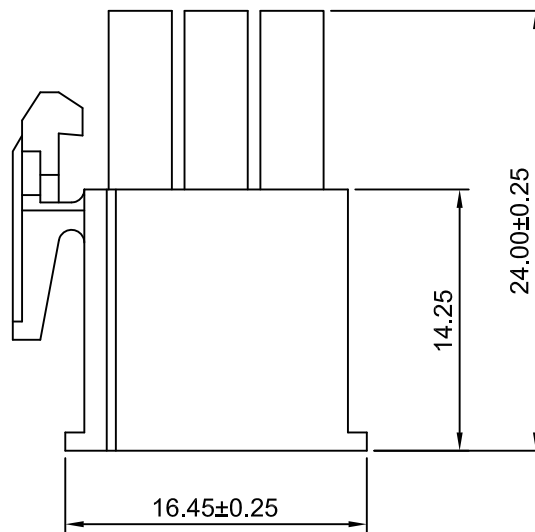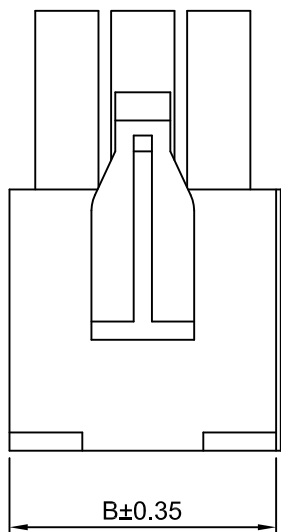

SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C4140HF-3x3P	8.28	14.55
C4140HF-3x4P	12.42	18.63
C4140HF-3x5P	16.56	22.77

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2.5:1	1 of 1		
DRWN	CHK'D	APPR	4.14mm PITCH HOUSING	
Dengchun Yi	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C4140HF-3xXP	REV A0
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				

A0	NEW RELEASE	2018,09,27
REV	DESCRIPTION	DATE