
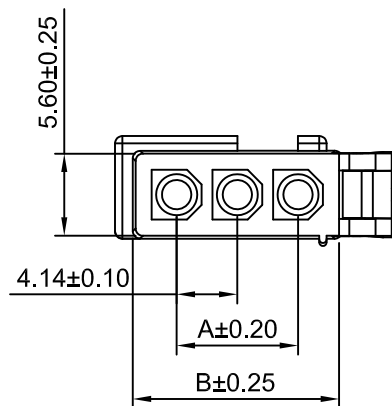




2P



Ordering Information:

C4140HF-XP - **

1 2

1.Part NO.

2.Material:

(Blank):Nylon 66,UL94V-2(Natural)

V0:Nylon 66,UL94V-0(White)

GWT:Nylon 66,UL94V-0(Beige),IEC 60335-1,5th
Edition Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min


Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)


Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
1P	---	5.76	7.00	3P	8.28	14.04	15.28
2P	4.14	9.90	11.14				


CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit		Scale	Sheet	TITLE	
mm		2:1	1 of 1	4.14mm PITCH	
DRAWN		CHK'D	APPR	HOUSING	
Haisen Li		Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO.	
x,xx±0.25 x,xx±0.20 x,xxx±0.15 ANGLES ±1°					
C4140HF-XP				REV A3	

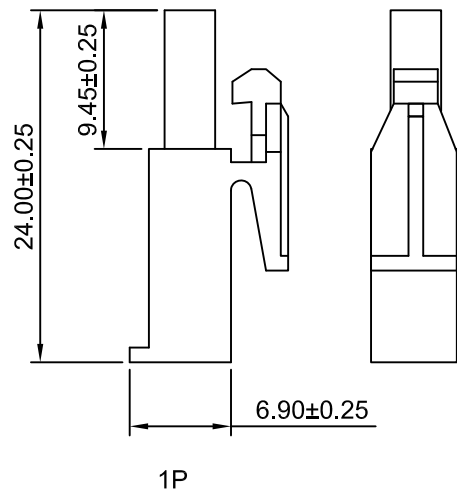

1P

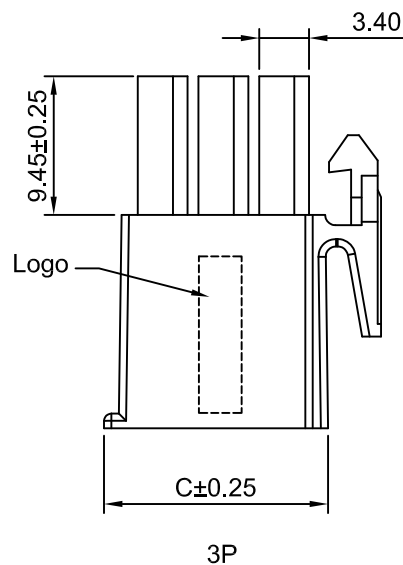

3P

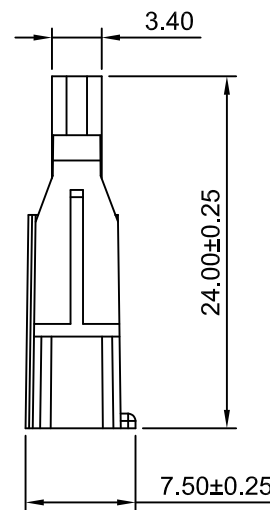

7.50±0.25

REV	DESCRIPTION	DATE
A3	CHANGE THE DRAWING	2022.11.08
A2	CHANGE THE DRAWING	2022.02.28
A1	CHANGE THE DRAWING	2021.03.27
A0	NEW RELEASE	2015.04.10