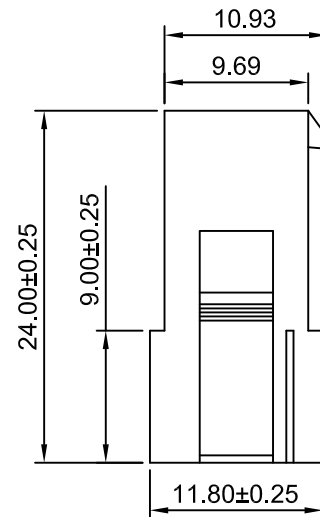
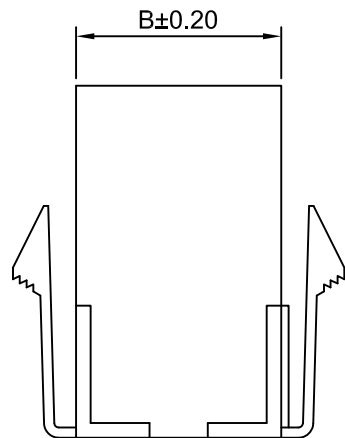
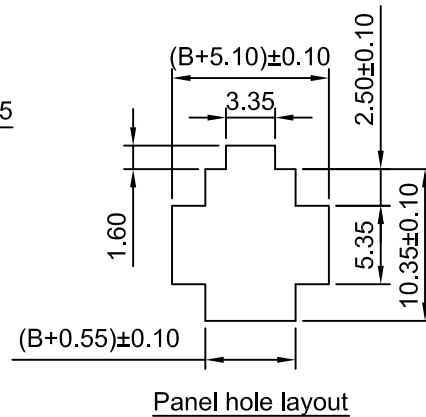
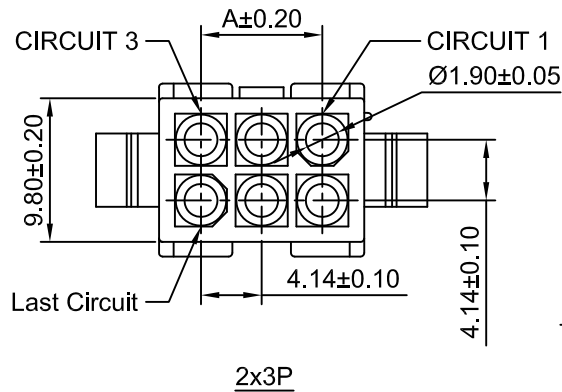


Ordering Information:

C4140HM-2xXP - ***
1 2

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-2/Natural

V0:Nylon 66,UL94V-0/White

GWT:NYLON 66,UL94V-0(BEIGE),IEC 60335-1,5TH
EDITION GLOW WIRE CAPABLE.

SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2X2P	4.14	9.90	2X4P	12.42	18.18
2X3P	8.28	14.04	2X5P	16.56	22.32

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	2:1	1 of 1	4.14MM PITCH HOUSING		
DRWN	CHKD	APPR			
Wenmin Luo	Diankui Wan	Jack Yin			
General Tolerances			THIRD ANGLE PROJECTION		
A1	CHANGE THE DRAWING	2021.04.01	DRAWING NO. C4140HM-2XXP		
A0	NEW RELEASE	2015.04.10			
REV	DESCRIPTION	DATE			
			REV A0		