
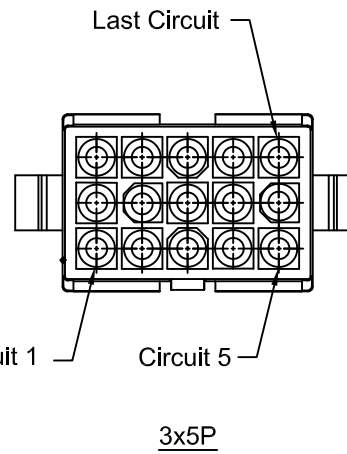
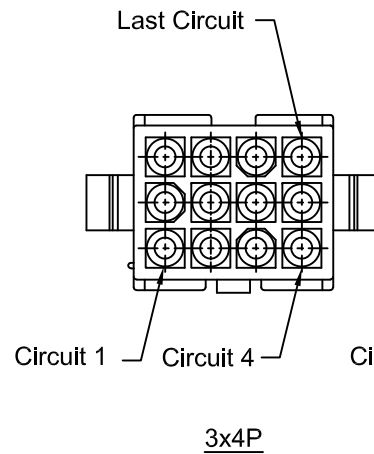
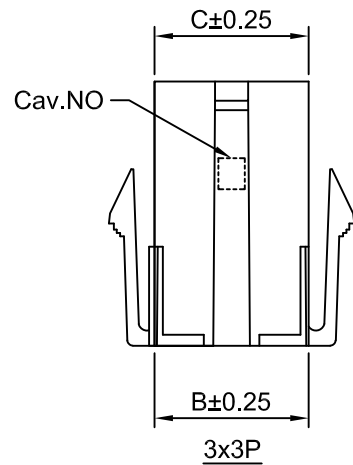



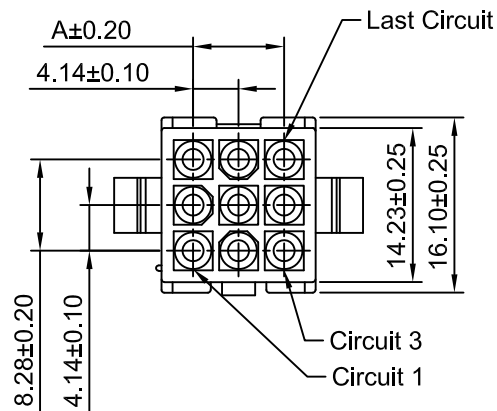

Ordering Information:

C4140HM-3xXP - ***
1 2

1.Part No.

2.Material:

(Blank):Nylon 66 UL94V-2

V0:Nylon 66 UL94V-0

GWT:Nylon 66 UL94V-0,IEC 60335-1,5th Edition

Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: $20\text{m}\Omega$ Max

Insulation Resistance: $1000\text{M}\Omega$ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

Circuits	Dimensions(mm)		
	A	B	C
C4140HM-3x3P	8.28	14.46	14.04
C4140HM-3x4P	12.42	18.60	18.18
C4140HM-3x5P	16.56	22.74	22.32

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	1.5:1	1 of 1		
DRWN	CHKD	APPR	4.20mm PITCH HOUSING	
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C4140HM-3xXP	REV A0
$x, x \pm 0.25$ $x, x x \pm 0.20$ $x, x x x \pm 0.15$ ANGLES $\pm 1^{\circ}$				

A0	NEW RELEASE	2021.03.26
REV	DESCRIPTION	DATE