
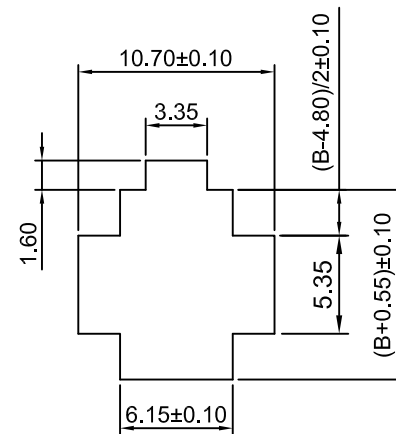


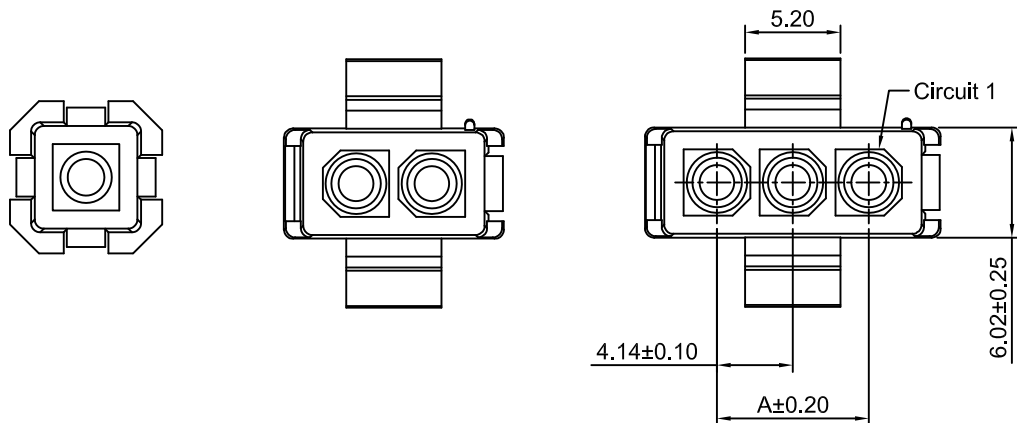

Panel hole layout
(2P~3P)

Ordering Information:

C4140HM-XP - ***
1 2

1.Part NO.

2.Material:

(Blank): Nylon 66, UL94V-2(Natural)

V0: Nylon 66, UL94V-0(White)

GWT: Nylon 66, UL94V-0(Beige),

IEC 60335-1, 5th Edition

Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 9A AC, DC

Voltage Rating: 600V AC, DC

Temperature Range: -40°C ~ +105°C


Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.


Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions


Part NO.	Dimensions(mm)			Part NO.	Dimensions(mm)		
	A	B	C		A	B	C
1P	---	5.60	8.30	3P	8.28	14.04	16.14
2P	4.14	9.90	12.00				

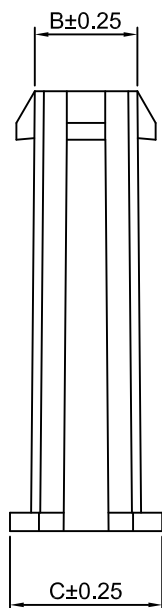

1P

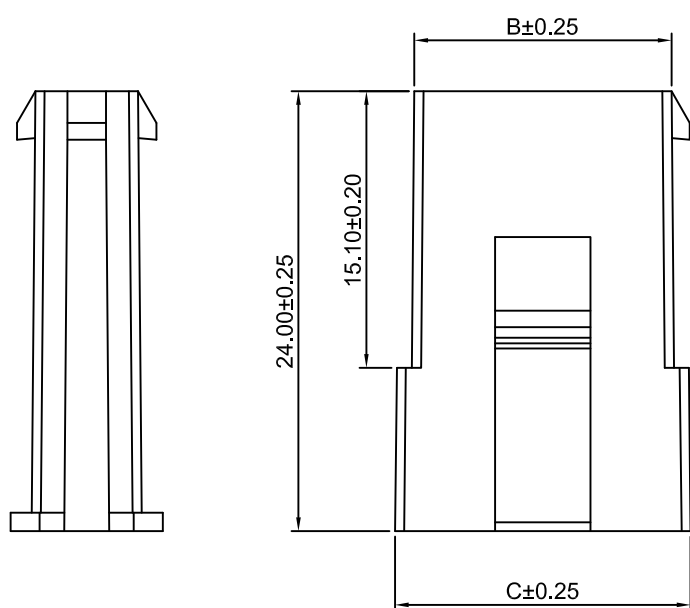

2P~3P

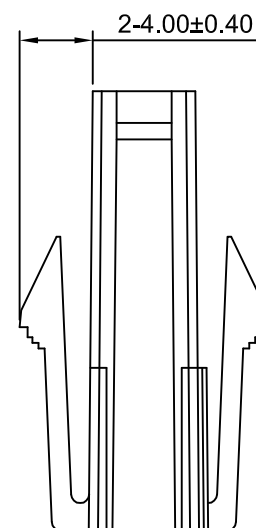

A2	CHANGE THE DRAWING	2023.05.25
A1	CHANGE THE DRAWING	2022.12.07
A0	NEW RELEASE	2015.04.10
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2.5:1	1 of 1	4.14mm PITCH HOUSING	
DRAWN	CHKD	APPR		
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°			DRAWING NO. C4140HM-XP	
			REV A2	