


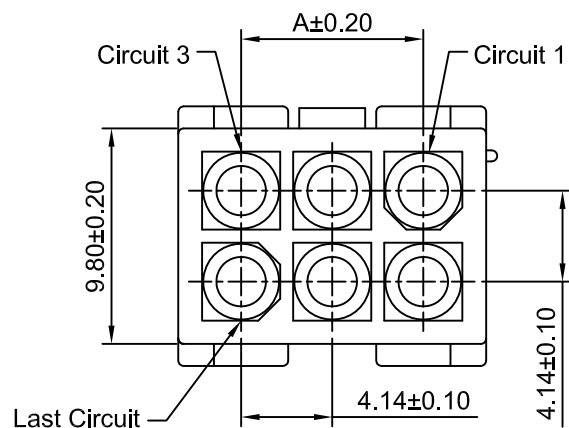

Ordering Information:

C4140HMA-2xXP - **
1 2



1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-2(Natural)

V0: Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

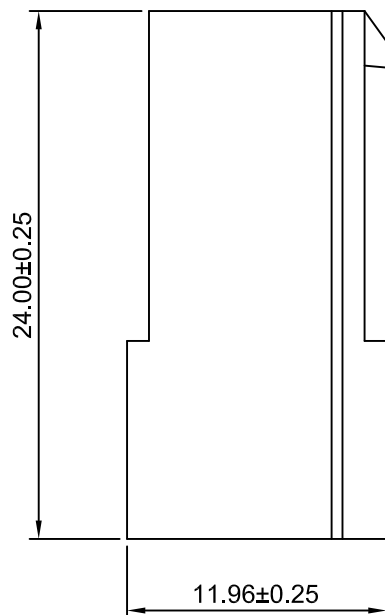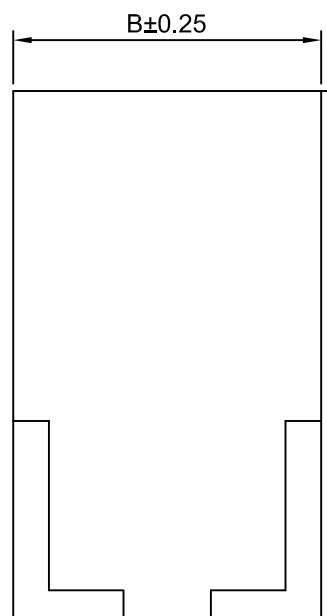

SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	4.14	9.90	2x4P	12.42	18.18
2x3P	8.28	14.04	2x5P	16.56	22.32

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		3:1		1 of 1		4.14mm PITCH HOUSING	
DRAWN		CHK'D		APPR			
Chengbiao Ye		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO.	
x,xx±0.25 x,xxx±0.20 x,xxx±0.15 ANGLES ±1°						C4140HMA-2xXP	
						REV A1	

A1	CHANGE THE DRAWING	2023.06.12
A0	NEW RELEASE	2015.04.10
REV	DESCRIPTION	DATE