



Circuit 1

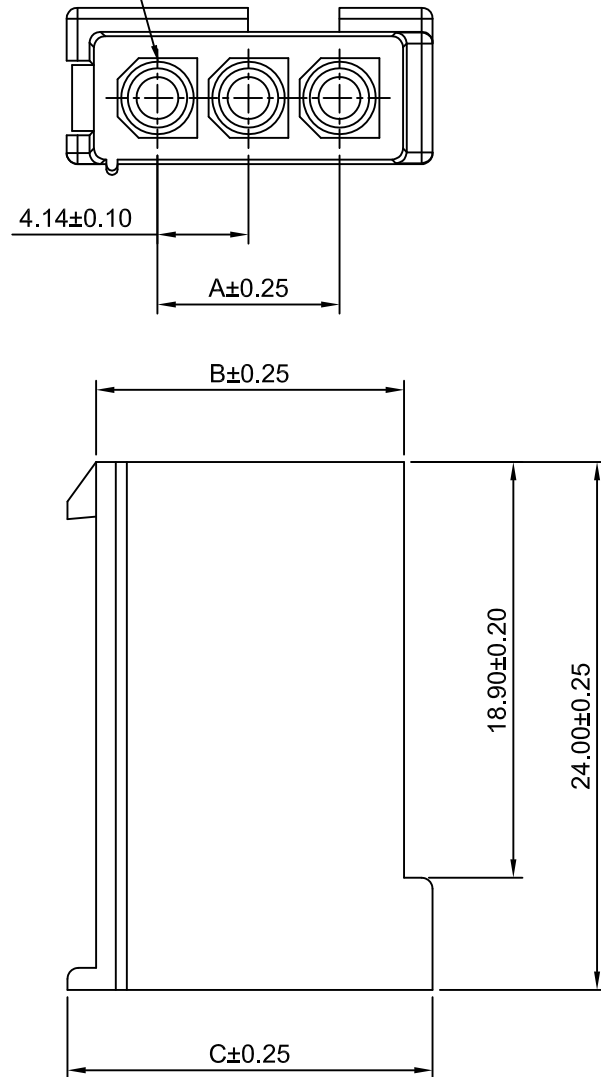

2P

Ordering Information:

C4140HMA-XP - ***
1 2

1.Part NO.


2.Material:

(Blank): Nylon 66,UL94V-2(Natural)

V0: Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition

Glow Wire Capable.

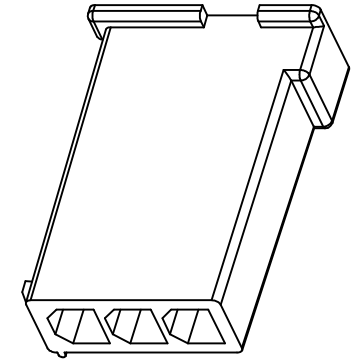

SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
C4140HMA-2P	4.14	9.90	12.50
C4140HMA-3P	8.28	14.04	16.64

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 4.14mm PITCH HOUSING	
mm		3:1		1 of 1			
DRWN		CHK'D		APPR			
Chengbiao Ye		Djankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO. C4140HMA-XP	
x,xx±0.25							
x,xx±0.20							
x,xxx±0.15							
ANGLES ±1°						REV A2	
A2							
A1							
A0							
REV		DESCRIPTION		DATE			