
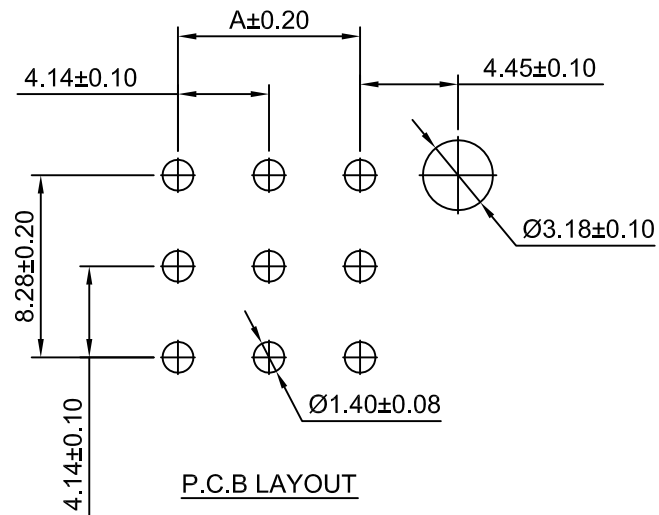


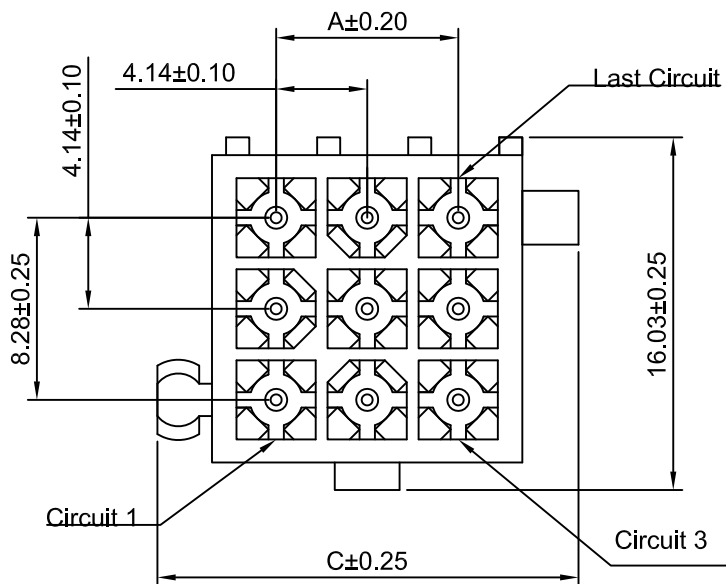

Ordering Information:

C4140WV-3xXP - **

1 2

1.Part NO.

2.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel (Au:1u")

G15: Gold over Nickel (Au:15u",Mating Area)

G30: Gold over Nickel (Au:30u",Mating Area)

SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min


Withstanding Voltage: 1500V AC/minute

Pin Material:Brass

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
C4140WV-3x3P	8.28	13.97	19.15
C4140WV-3x4P	12.42	18.11	23.29
C4140WV-3x5P	16.56	22.25	27.43

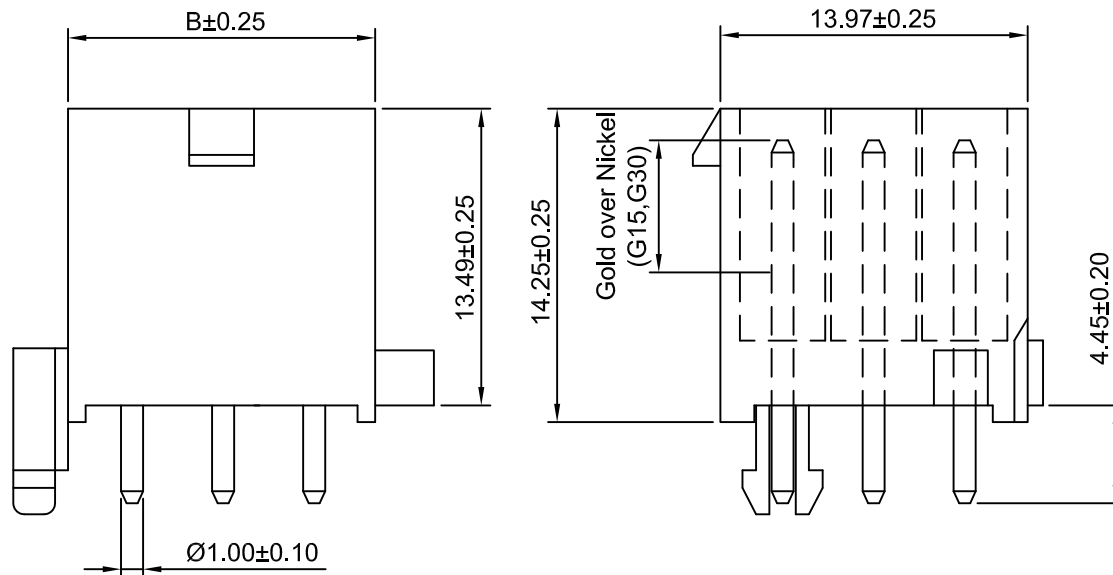

A1	CHANGE THE DRAWING	2022.02.24
A0	NEW RELEASE	2015.04.14
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE 4.14mm PITCH VERTICAL WAFER	
mm	3:1	1 of 1		
DRWN	CHKD	APPR		
Wenmin Luo	DianKui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C4140WV-3xXP	REV A1
x.x±0.25				
x.xx±0.20				
x.xxx±0.15				
ANGLES ±1°				