

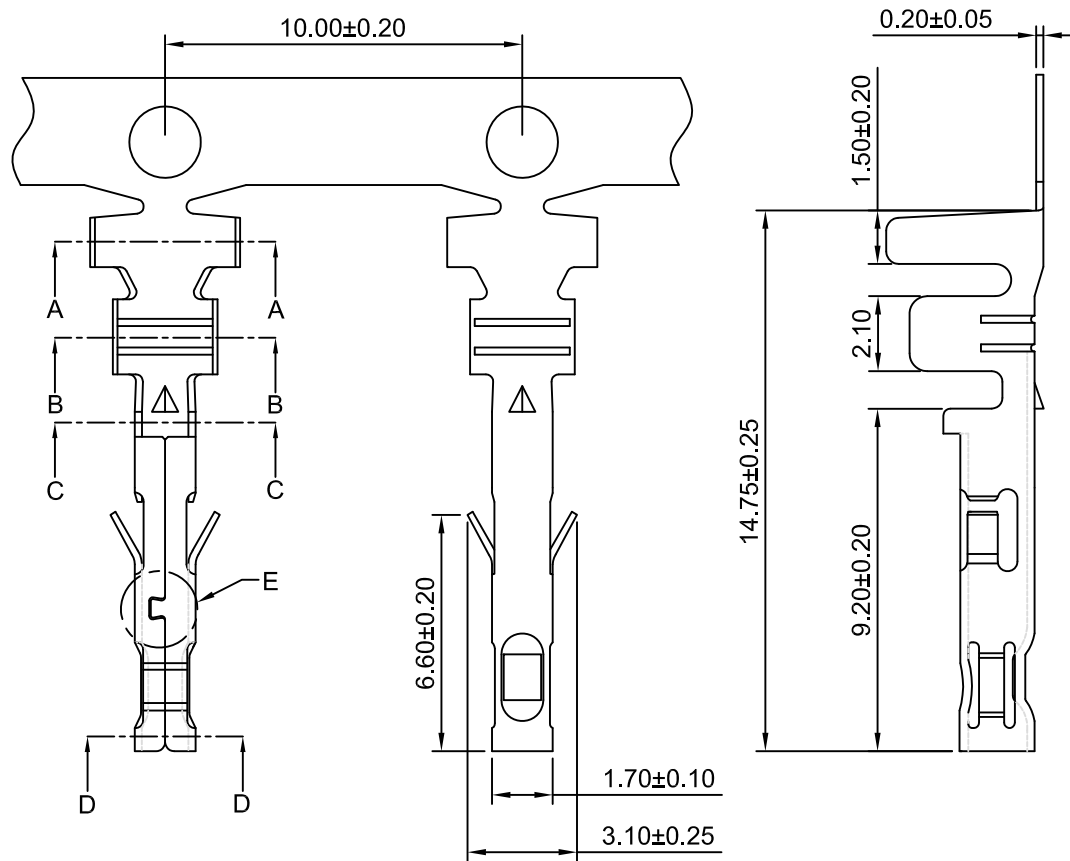



SEC:A-A




SEC:B-B



SEC:C-C



SEC:D-D



The Lock Catch Must
Be An Inverted Trapezoid

E
2:1

Ordering information & Specifications

Unit:mm

Part NO.	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
C4201F-TB-B-HH	AWG#16	3.10mm(max)	Brass	Tin over Nickel	5,000 PCS
C4201F-GB-B-HH	AWG#16	3.10mm(max)	Brass	Gold over Nickel	5,000 PCS
C4201F-TP-B-HH	AWG#16	3.10mm(max)	Phosphor Bronze	Tin over Nickel	5,000 PCS
C4201F-GP-B-HH	AWG#16	3.10mm(max)	Phosphor Bronze	Gold over Nickel	5,000 PCS
C4201F-TCA-B-HH	AWG#16	3.10mm(max)	High conductive copper alloy	Tin over Nickel	5,000 PCS
C4201F-GCA-B-HH	AWG#16	3.10mm(max)	High conductive copper alloy	Gold over Nickel	5,000 PCS

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit mm	Scale 5:1	Sheet 1 of 1	TITLE 4.20mm PITCH CRIMP TERMINAL
DRAWN Haisen Li	CHK'D Djankui Wan	APPR Jack Yin	
General Tolerances x,xx±0.25 x.xxx±0.20 x,xxx±0.15 ANGLES ±1°		THIRD ANGLE PROJECTION	
A0	NEW RELEASE	2023.03.25	DRAWING NO. C4201F-T-B-HH
REV	DESCRIPTION	DATE	
			REV A0