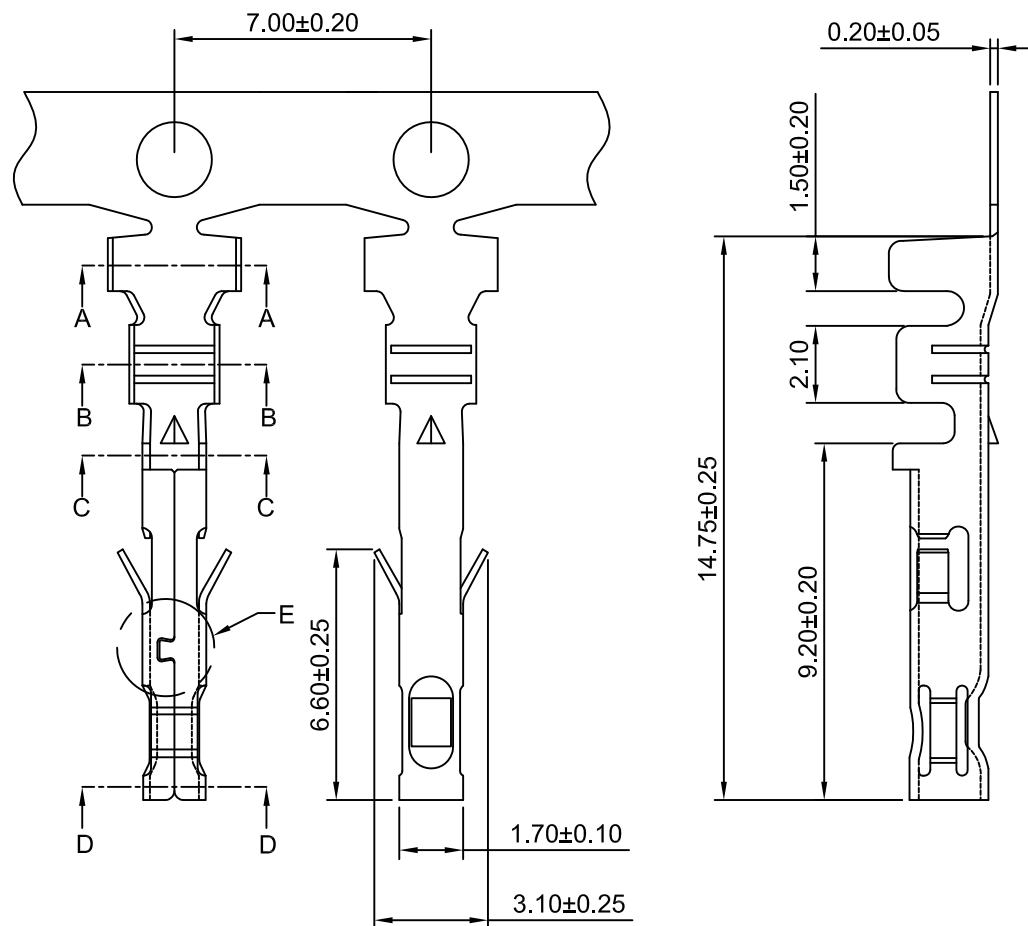


The Lock Catch Must
Be An Inverted Trapezoid

E
2:1

Ordering information & Specifications

Unit:mm

Part NO.	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
C4201F-TB-B-H	AWG#18-#20	2.95mm(max)	Brass	Tin over Nickel	10,000 PCS
C4201F-GB-B-H	AWG#18-#20	2.95mm(max)	Brass	Gold over Nickel	10,000 PCS
C4201F-TP-B-H	AWG#18-#20	2.95mm(max)	Phosphor Bronze	Tin over Nickel	10,000 PCS
C4201F-GP-B-H	AWG#18-#20	2.95mm(max)	Phosphor Bronze	Gold over Nickel	10,000 PCS
C4201F-TCA-B-H	AWG#18-#20	2.95mm(max)	High conductive copper alloy	Tin over Nickel	10,000 PCS
C4201F-GCA-B-H	AWG#18-#20	2.95mm(max)	High conductive copper alloy	Gold over Nickel	10,000 PCS

CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE 4.20mm PITCH CRIMP TERMINAL	
mm	5:1	1 of 1		
DRAWN	CHK'D	APPR		
Haisen Li	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION		
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO.	REV
			C4201F-T-B-H	A0