

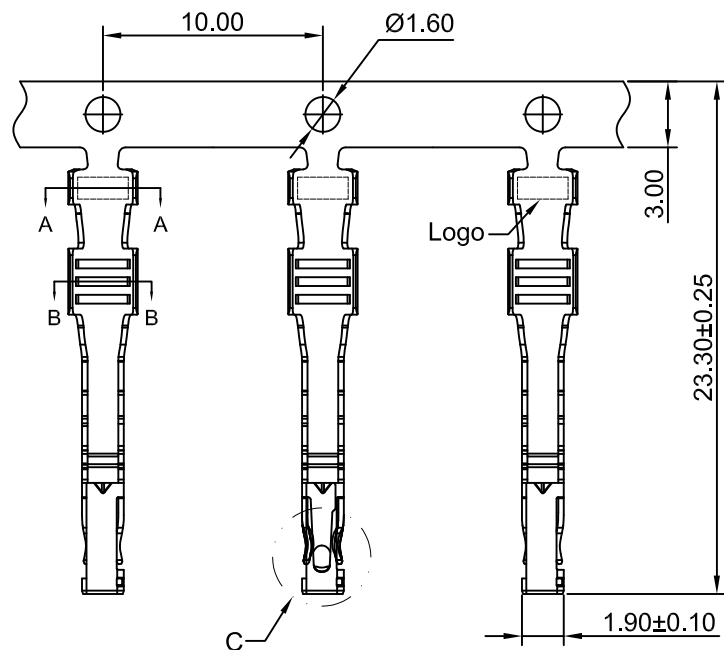



2:1

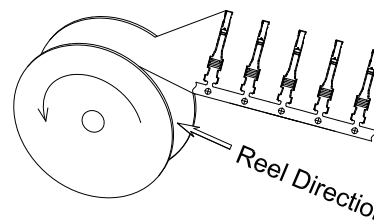

C
2:1

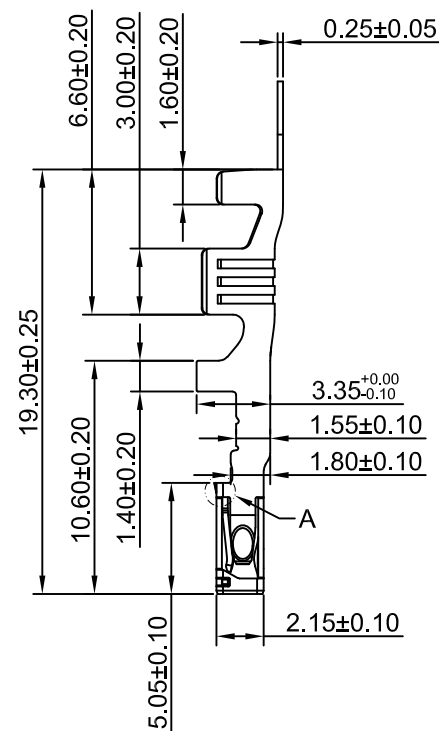

Winding Direction

Ordering Information:

C4201FH - *** -H- ***
1 2 3

1.Part NO.

2.Material:

GP: Phosphor Bronze

GCA: High conductive copper alloy


3.Finish:

(Blank): Gold over Nickel (Au:1u")


G10: Gold over Nickel (Au:10u"Mating area)

G15: Gold over Nickel (Au:15u"Mating area)


G30: Gold over Nickel (Au:30u"Mating area)



SEC:A-A



SEC:B-B



A
2:1

Ordering information & Specifications

Unit:mm

Part NO.	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
C4201FH-TP-H	AWG#14	2.78mm(Max)	Phosphor Bronze	Tin over Nickel	10,000 PCS
C4201FH-GP-H	AWG#14	2.78mm(Max)	Phosphor Bronze	Gold over Nickel	10,000 PCS
C4201FH-TCA-H	AWG#14	2.78mm(Max)	High Conductive Copper Alloy	Tin over Nickel	10,000 PCS
C4201FH-GCA-H	AWG#14	2.78mm(Max)	High Conductive Copper Alloy	Gold over Nickel	10,000 PCS

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	3:1	2 of 2	4.20mm PITCH TERMINAL
DRAWN	CHK'D	APPR'D	
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C4201FH-T-H
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			
			REV A0