
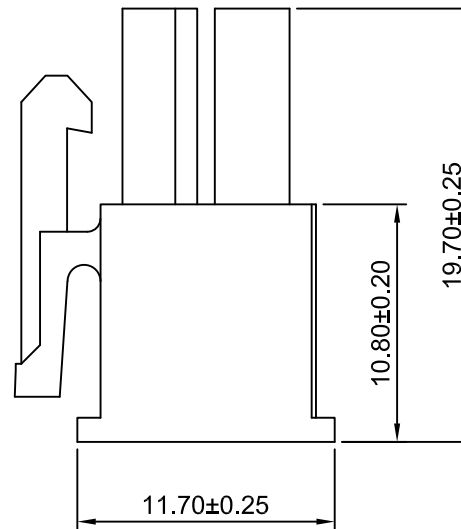
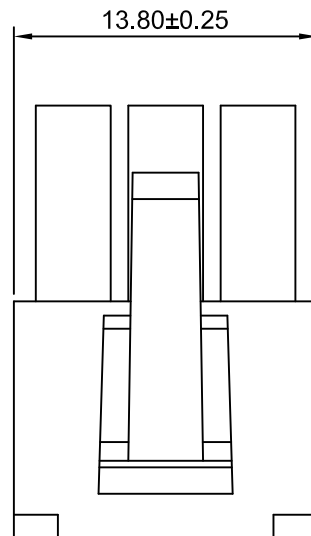


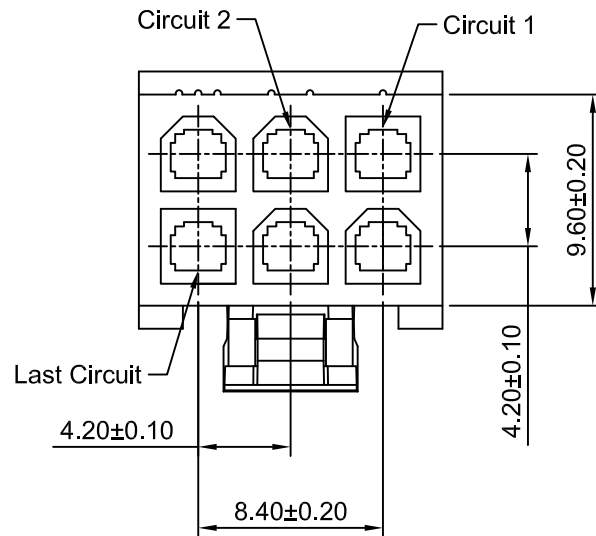

Ordering Information:

C4201HF-2x3P-B - $\frac{***}{1}$ - $\frac{***}{2}$ - $\frac{***}{3}$

1.Part No.

2.Material:

(blank):Nylon 66 UL94V-2

V0:Nylon 66 UL94V-0

GWT:Nylon 66 UL94V-0,GWT 750°C

3.Color:

(blank):Black


NAT:Natural

RD:Red

YL:Yellow

BL:Blue

GN:Green

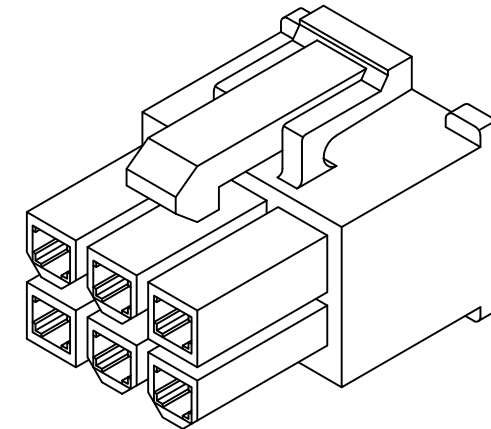

SPECIFICATIONS:

Current Rating: 13A AC,DC(Max)(Maximum current up to 13A when using the C4201F-TCA-HH series terminal)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Black)

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	3:1	1 of 1	4.20mm PITCH DUAL ROW HOUSING - SPECIAL TYPE
DRWN	CHK'D	APPR	
Wenmin Luo	DianKui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C4201HF-2x3P-B
x,xx±0.25 x,xx±0.20 x,xxx±0.15 ANGLES ±1°			
			REV A2

A2	CHANGE THE DRAWING	2022.04.22
A1	CHANGE THE INFORMATION	2019.12.13
A0	NEW RELEASE	2012.11.14
REV	DESCRIPTION	DATE