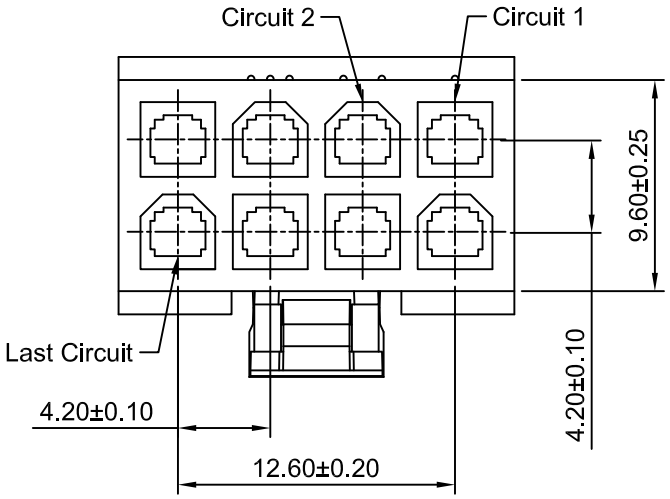

Ordering Information:

C4201HF-2x4P-A - *** - ***
1 2 3

1.Part No.
2.Material:
(blank):Nylon 66,UL94V-2
V0:Nylon 66,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750°C
3.Color:
(blank):Black
NAT:Natural
RD:Red
YL:Yellow
BL:Blue
GN:Green

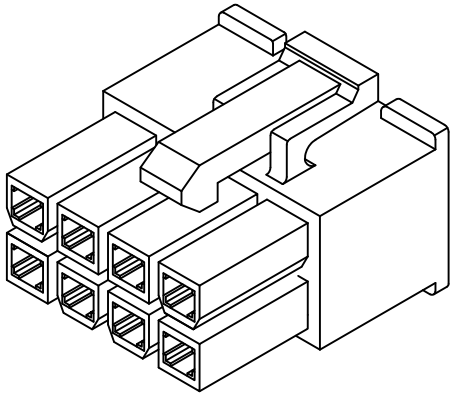

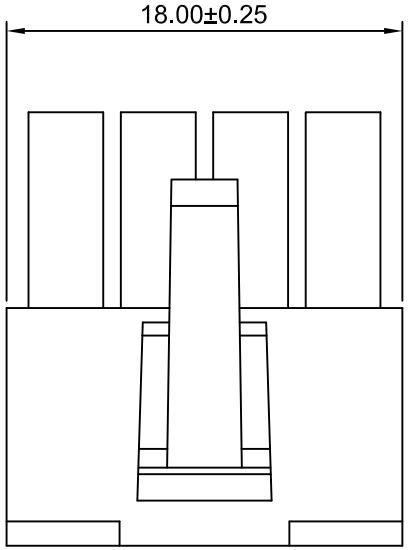

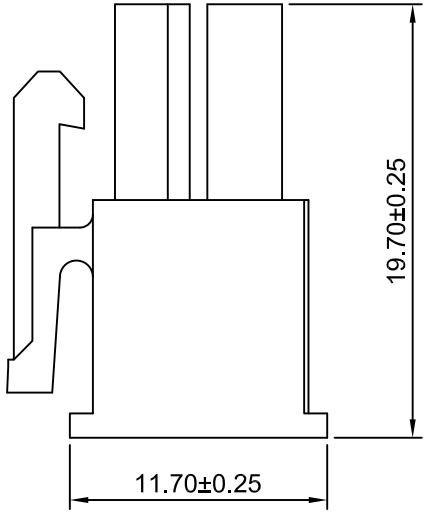

SPECIFICATIONS:
Current Rating: 13A AC,DC(Max)(Maximum current up to 13A when using the C4201F-TCA-HH series terminal)
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-2(Black)

REV	DESCRIPTION	DATE
A2	CHANGE THE DRAWING	2022.04.22
A1	CHANGE THE INFORMATION	2019.12.14
A0	NEW RELEASE	2009.12.24

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1
DRWN	CHK'D	APPR
Wenmin Luo	DianKui Wan	Jack Yin

General Tolerances
x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°

THIRD ANGLE PROJECTION

TITLE
4.20mm PITCH
DUAL ROW HOUSING
- SPECIAL TYPE

DRAWING NO.
C4201HF-2x4P-A

REV
A2