
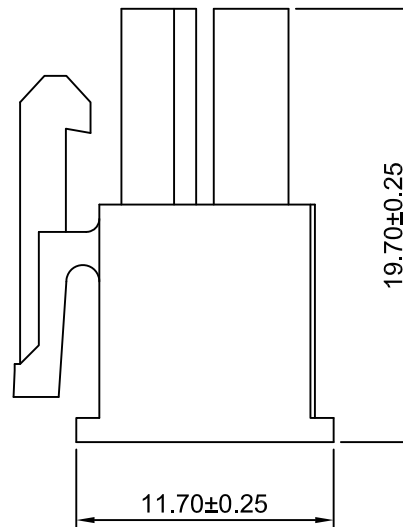
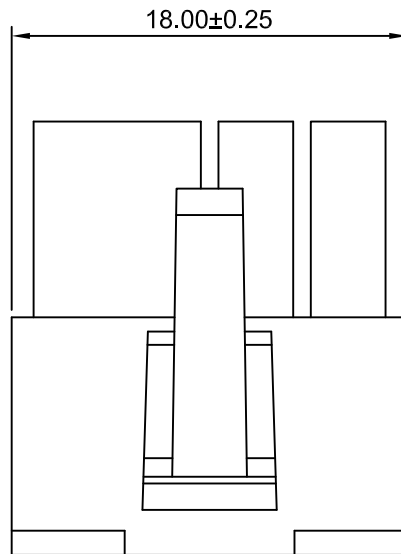


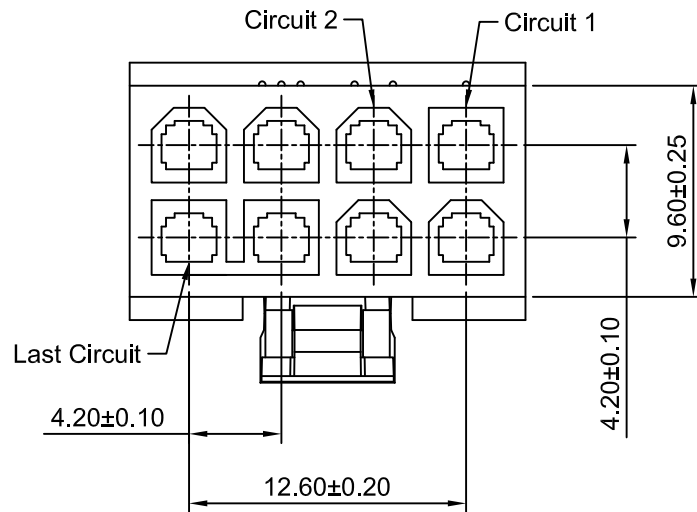

Ordering Information:

C4201HF-2x4P-B - *** - ***
1 2 3

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-2

V0:Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750°C

3.Color:

(blank):Black


NAT:Natural

RD:Red

YL:Yellow

BL:Blue

GN:Green

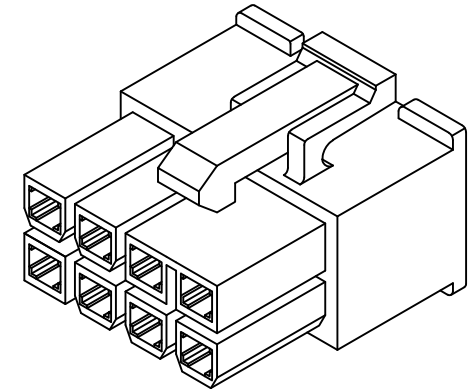

SPECIFICATIONS:

Current Rating: 13A AC,DC(Max)(Maximum current up to 13A when using the C4201F-TCA-HH series terminal)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Black)

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1
Draw By:		Approved :
Diankui Wan		Jack Yin

Title :

4.20mm PITCH
DUAL ROW HOUSING
- SPECIAL TYPE

A2	CHANGE THE DRAWING	2022.04.22
A1	CHANGE THE INFORMATION	2009.12.24
A0	NEW RELEASE	2009.12.24
REV	DESCRIPTION	DATE

General Tolerance
x.xx±0.25
x.xx±0.20
x.xxx±0.15
PROJECT
⊕

DRAW NO : C4201HF-2x4P-B

REV
A2