
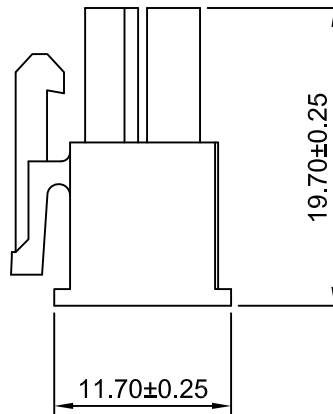
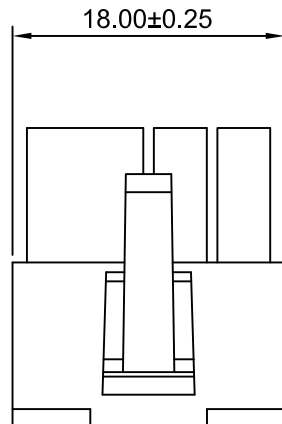


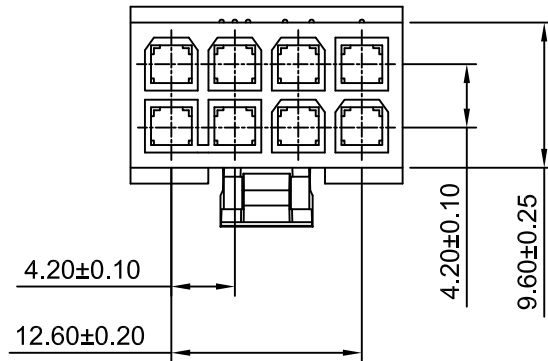

Ordering Information:

C4201HF-2x4P-C - ^{**}/₂ - ^{**}/₃

1.Part No.

2.Material:

(blank):Nylon 66 UL94V-2

V0:Nylon 66 UL94V-0

GWT:Nylon 66 UL94V-0,GWT 750°C

3.Color:

(blank):Natural


BK:Black

RD:Red

YL:Yellow

BL:Blue

GN:Green



SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Natural)

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1

Draw By:	Approved :
Diankui Wan	Jack Yin

General Tolerance

A1	CHANGE THE INFORMATION	2009.12.24	x.x±0.25	PROJECT ⊕
A0	NEW RELEASE	2009.12.24	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	

Title :
4.20mm PITCH

DUAL ROW HOUSING

DRAW NO : C4201HF-2x4P-C

REV
A1