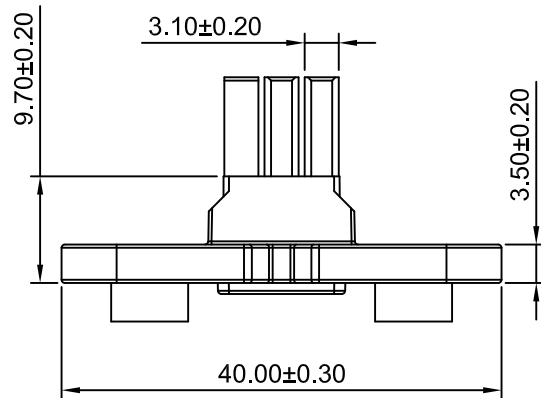
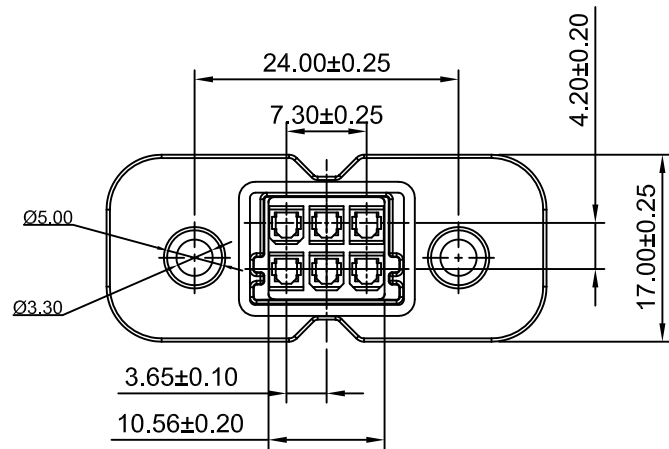


Ordering Information:

C4201HFB-2x3P-E - ** - **
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66 UL94V-2 (Natural)

V0: Nylon 66 UL94V-0 (White)

GWT: Nylon 66,UL94V-0 (Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank): see section 2 Material

BK:Black RD:Red

YL:Yellow BL:Blue

GN:Green

SPECIFICATIONS:

Current Rating: 13A AC,DC (MAX)(Maximum current up to 13A when using the C4201F-TCA-HH series terminal)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	1:5:1	1 of 1	4.20mm PITCH DUAL ROW WITH PANEL MOUNT EARS HOUSING	
DRAWN	CHK'D	APPR'D	DRAWING NO.	
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	C4201HFB-2x3P-E	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A0	

A0	NEW RELEASE	2024.10.22
REV	DESCRIPTION	DATE