
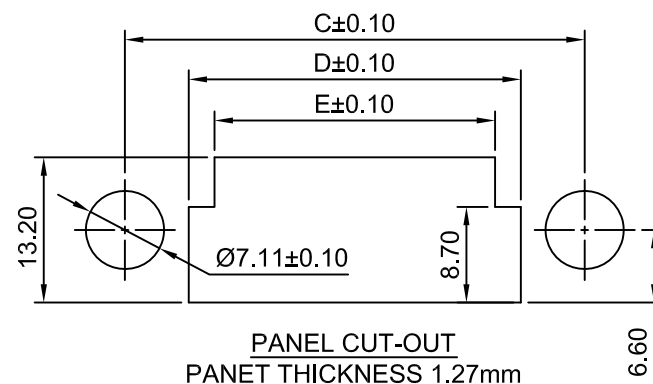
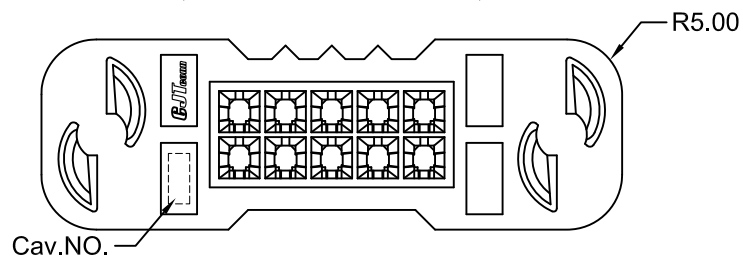
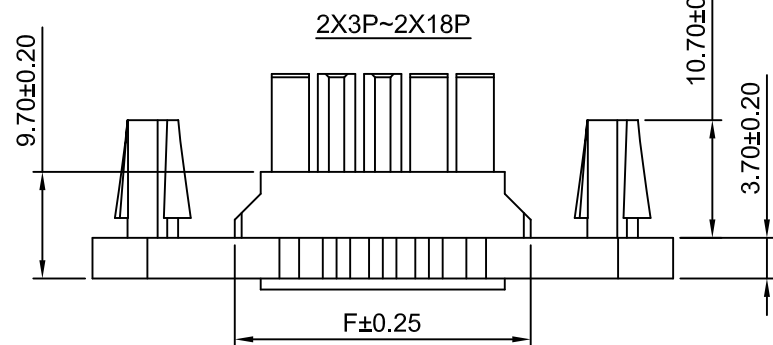
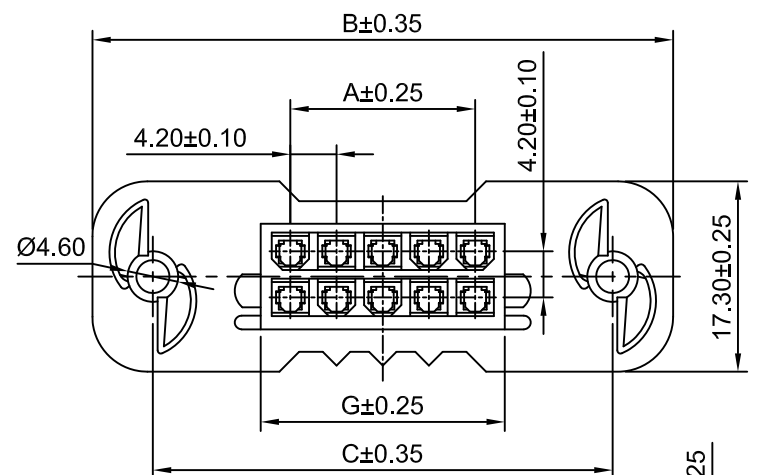


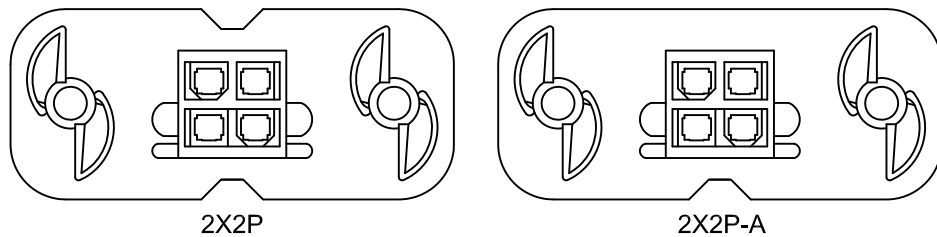

Ordering Information:

C4201HFB-2xXP - ** - **
1 2 3

1.Part NO.

2.Material:

(blank): Nylon 66 UL94V-2 (Natural)

V0: Nylon 66 UL94V-0 (White)

GWT: Nylon 66,UL94V-0 (Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(blank): see section 2 Material

BK:Black RD:Red

YL:Yellow BL:Blue

GN:Green

SPECIFICATIONS:

Current Rating: 13A AC,DC (MAX)(Maximum current up to 13A when using the C4201F-TCA-HH series terminal)

Voltage Rating: 600V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)						
	A	B	C	D	E	F	G
C4201HFB-2x1P	---	36.00	25.00	13.40	8.70	10.10	5.40
C4201HFB-2x2P	4.20	40.20	29.20	17.60	12.90	14.30	9.60
C4201HFB-2x3P	8.40	44.40	33.40	21.80	17.10	18.50	13.80
C4201HFB-2x4P	12.60	48.60	37.60	26.00	21.30	22.70	18.00
C4201HFB-2x5P	16.80	52.80	41.80	30.20	25.50	26.90	22.20
C4201HFB-2x6P	21.00	57.00	46.00	34.40	29.70	31.10	26.40
C4201HFB-2x7P	25.20	61.20	50.20	38.60	33.90	35.30	30.60
C4201HFB-2x8P	29.40	65.40	54.40	42.80	38.10	39.50	34.80
C4201HFB-2x9P	33.60	69.60	58.60	47.00	42.30	43.70	39.00
C4201HFB-2x10P	37.80	73.80	62.80	51.20	46.50	47.90	43.20
C4201HFB-2x11P	42.00	78.00	67.00	55.40	50.70	52.10	47.40
C4201HFB-2x12P	46.20	82.20	71.20	59.60	54.90	56.30	51.60
C4201HFB-2x18P	71.40	107.40	96.40	84.80	76.78	81.50	76.80

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	1:5:1	1 of 1	4.20mm PITCH DUAL ROW WITH PANEL MOUNT EARS HOUSING	
DRWN	CHKD	APPR	DRAWING NO.	REV
Dengchun Yi	Djankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	C4201HFB-2xXP
A1	CHANGE TOLERANCE	2021.11.22		
A0	NEW RELEASE	2020.11.30		A1
REV	DESCRIPTION	DATE		