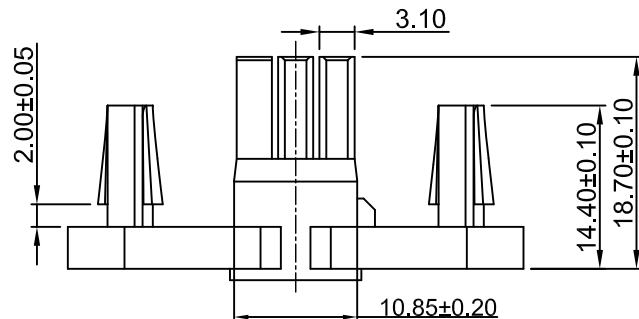
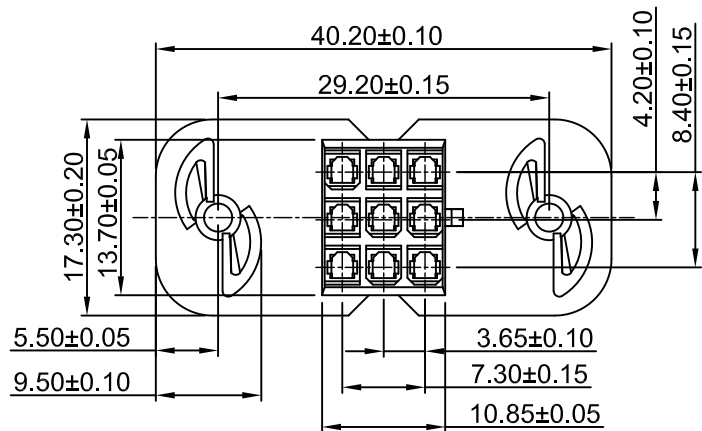


Ordering Information:
C4201HFB-3x3P-F - ** - **
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66 UL94V-0 (White)

GWT: Nylon 66,UL94V-0 (Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank): see section 2 Material

BK:Black RD:Red

YL:Yellow BL:Blue

GN:Green

SPECIFICATIONS:

Current Rating: 5A AC/DC MAX

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	1:1	1 of 1	3.65x4.20mm PITCH THREE ROW WITH PANEL MOUNT EARS HOUSING
DRAWN	CHK'D	APP'R'D	
Haisen Li	Diankui wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°			C4201HFB-3x3P-F
A1	JL-GC-ECN00601		REV A1
A0	NEW RELEASE	2024.12.24	
REV	DESCRIPTION	DATE	

A1	JL-GC-ECN00601	2025.04.16
A0	NEW RELEASE	2024.12.24
REV	DESCRIPTION	DATE