
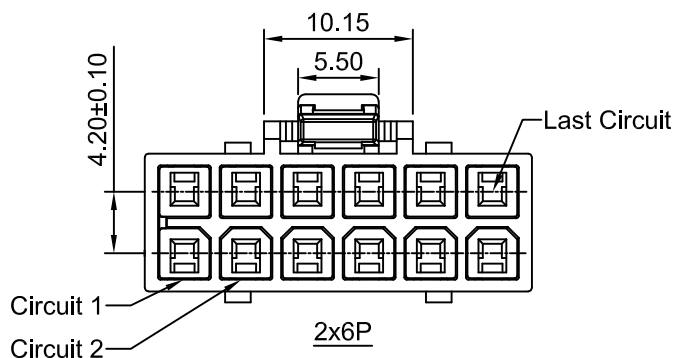
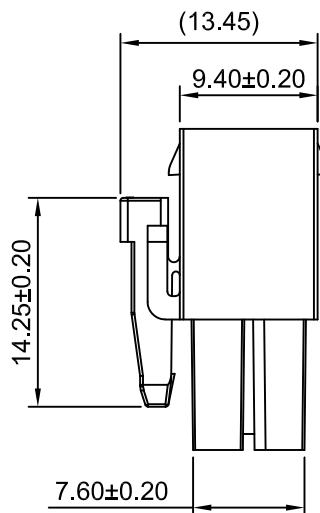
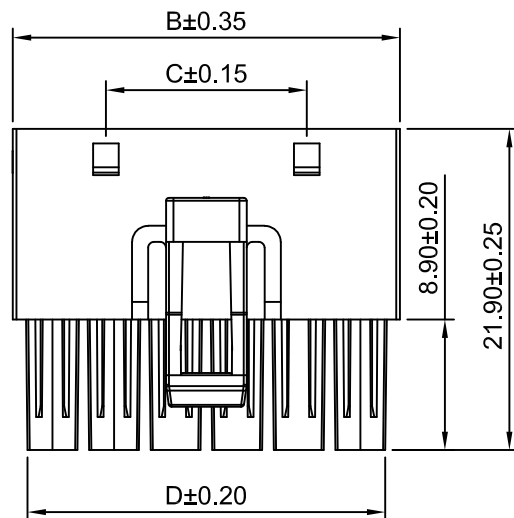
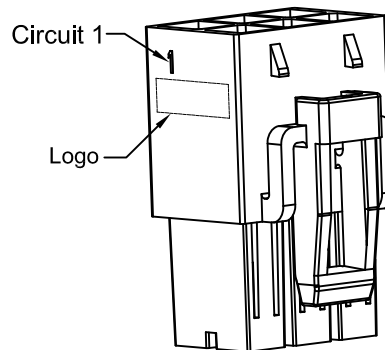


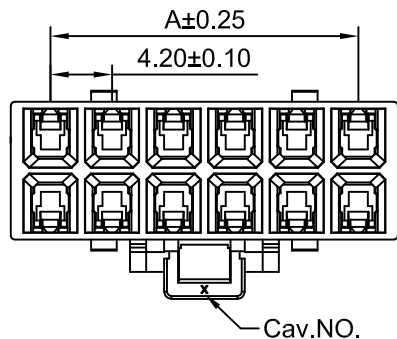

Ordering Information:

C4201HFH-2xXP - *** - ** - **
1 2 3 4

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank): Natural

BK: Black

4.Packing:

(Blank): Bag

SPECIFICATIONS:

Current Rating: 20.5A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 2200 AC/minute


Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
C4201HFH-2x1P	---	10.10	6.75	---
C4201HFH-2x2P	4.20	10.10	6.75	7.60
C4201HFH-2x3P	8.40	13.80	6.75	11.80
C4201HFH-2x4P	12.60	18.00	6.75	16.00
C4201HFH-2x5P	16.80	22.20	13.70	20.20
C4201HFH-2x6P	21.00	26.40	13.70	24.40


CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 2	4.20mm PITCH DUAL ROW HOUSING	
DRAWN	CHK'D	APPR'D		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			C4201HFH-2xXP	A0


A0	NEW RELEASE	2025.02.07
REV	DESCRIPTION	DATE




2x1P




2x2P




2x3P

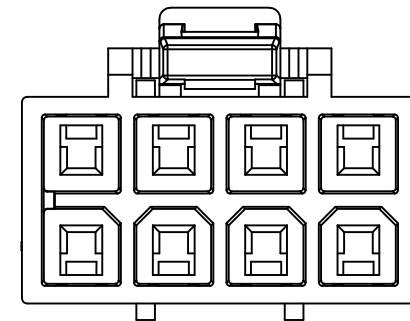


2x4P

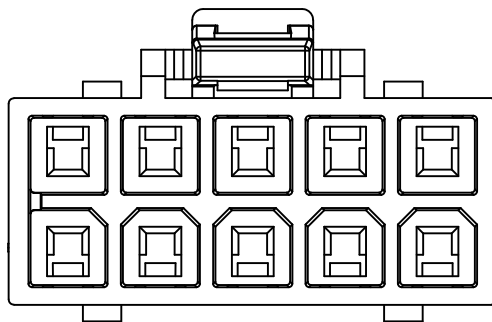

2x5P

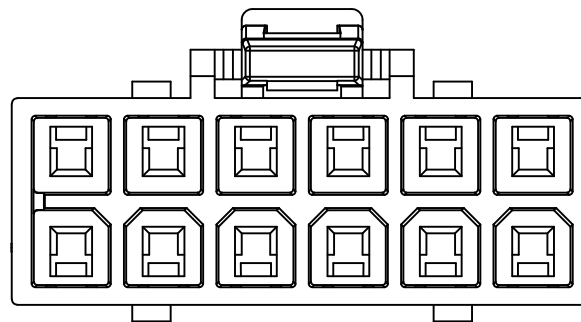

2x6P

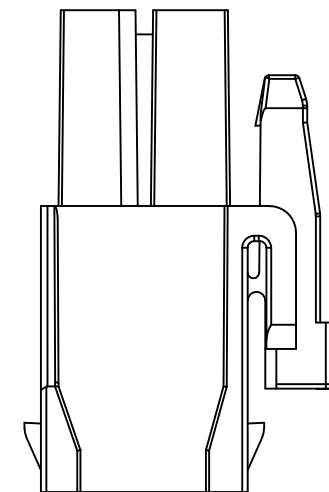

2x1P

A0	NEW RELEASE	2025.02.07
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE 4.20mm PITCH DUAL ROW HOUSING	
mm	3:1	2 of 2		
DRAWN	CHK'D	APPR'D		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C4201HFH-2xXP	REV A0
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°				