
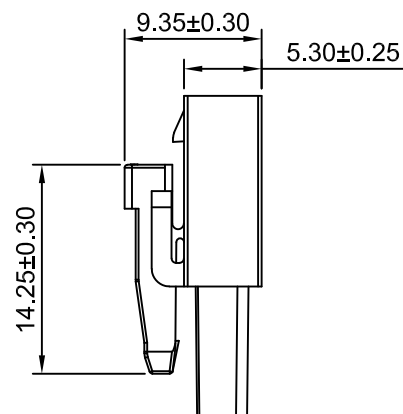
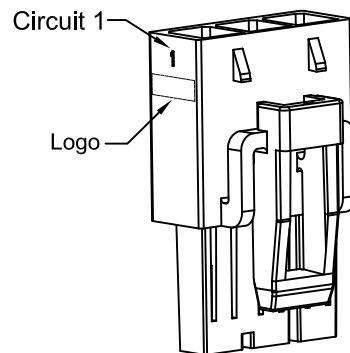
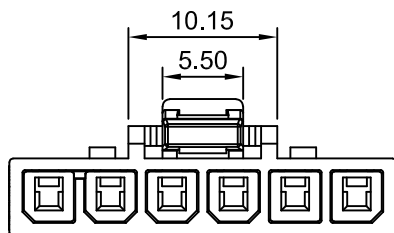
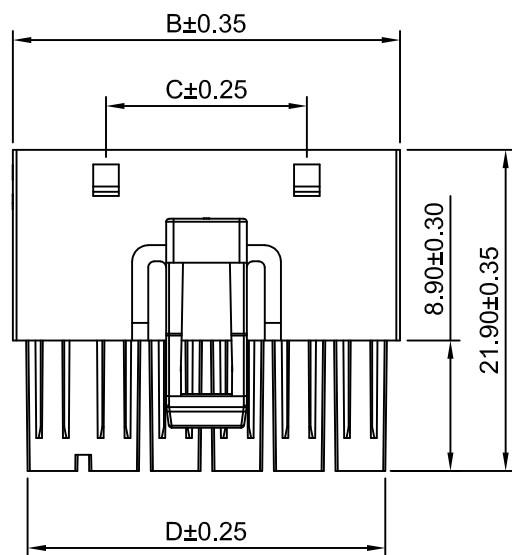


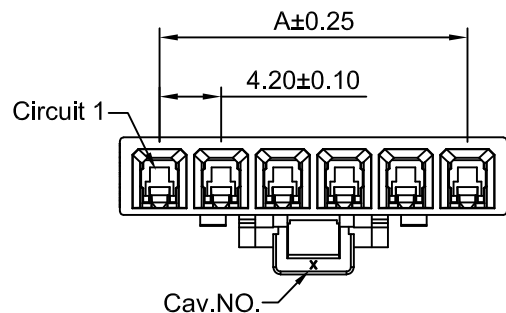

Ordering Information:

C4201HFH-XP - ** - ** - **
1 2 3 4

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank): Natural

BK: Black

4.Packing:

(Blank): Bag

SPECIFICATIONS:

Current Rating: 21A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 2200 AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
C4201HFH-2P	4.20	10.10	6.75	7.60
C4201HFH-3P	8.40	13.80	6.75	11.80
C4201HFH-4P	12.60	18.00	6.75	16.00
C4201HFH-5P	16.80	22.20	13.70	20.20
C4201HFH-6P	21.00	26.40	13.70	24.40

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 2	4.20mm PITCH SINGLE ROW HOUSING	
DRAWN	CHK'D	APPR'D		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			C4201HFH-XP	A0

A0	NEW RELEASE	2025.02.07
REV	DESCRIPTION	DATE