


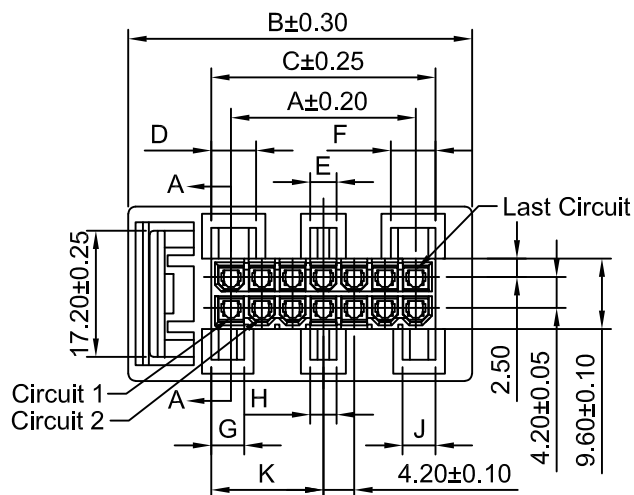
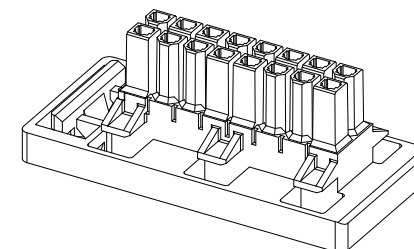
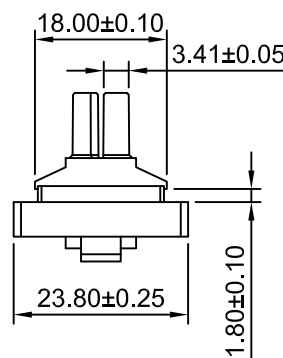


Circuits	Dimensions(mm)											
	A	B	C	D	E	F	G	H	J	K	L	M
C4201HFI-2x2P	4.20	25.90	9.60	--	4.50	--	--	4.50	--	4.80	18.00	7.60
C4201HFI-2x3P	8.40	30.10	13.80	--	4.50	--	--	4.50	--	6.90	22.20	11.80
C4201HFI-2x4P	12.60	34.30	18.00	--	6.10	--	4.50	--	4.50	9.00	26.40	16.00
C4201HFI-2x5P	16.80	38.50	22.20	--	6.10	--	4.50	--	4.50	11.10	30.60	20.20
C4201HFI-2x7P	25.20	46.90	30.60	6.11	3.59	6.11	4.50	3.59	4.50	15.30	39.00	28.60
C4201HFI-2x8P	29.40	51.10	34.80	6.11	4.50	6.11	4.50	4.50	4.50	17.40	43.20	32.80

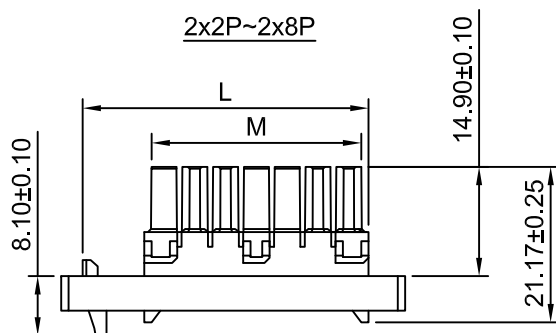

SECTION "A-A"



Ordering Information:

C4201HFI-2xXP - ** - **
1 2 3

1.Part NO.

2.Material:

(blank): Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:





(blank): Black

NAT: Natural

SPECIFICATIONS:


Current Rating: 13A AC,DC(Max)
(Maximum current up to 13A when
using the C4201F-TCA-HH series terminal)
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(Black)

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	1:1	1 of 7	4.20mm Pitch Dual Row With Panel Mount Ears Housing
DRWN	CHK'D	APPR	
Wenmin Luo	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			DRAWING NO.
			C4201HFI-2xXP
			REV A0

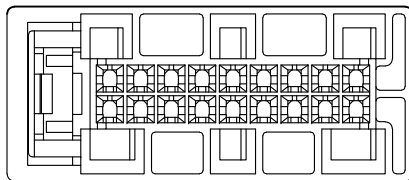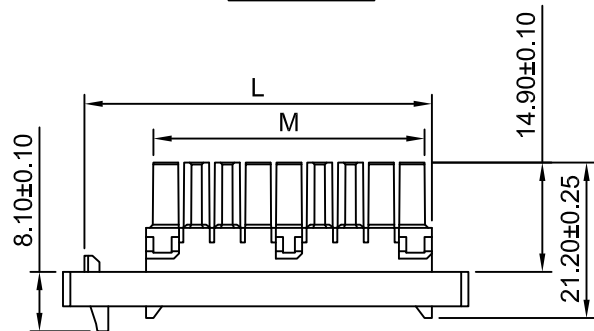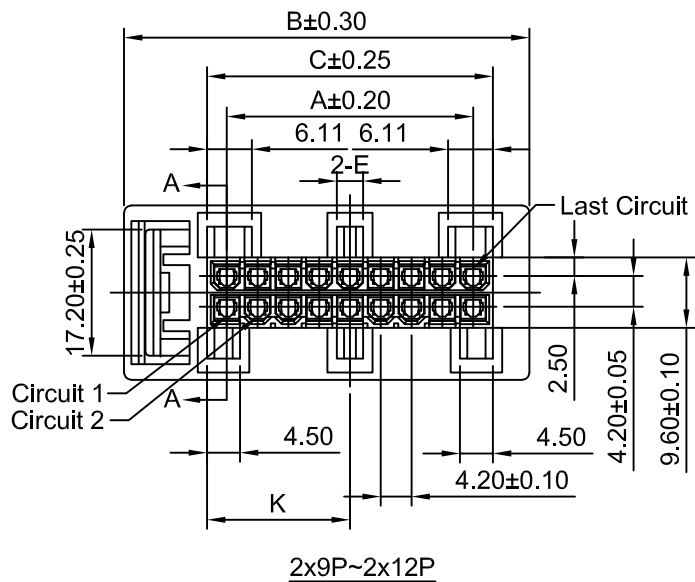

SECTION "A-A"

Circuits	Dimensions(mm)						
	A	B	C	E	K	L	M
C4201HFI-2x9P	33.60	55.30	39.00	3.59	19.50	47.40	37.00
C4201HFI-2x10P	37.80	59.50	43.20	4.50	21.60	51.60	41.20
C4201HFI-2x11P	42.00	63.70	47.40	3.59	23.70	55.80	45.40
C4201HFI-2x12P	46.20	67.90	51.60	4.50	25.80	60.00	49.60
C4201HFI-2x18P	71.40	93.60	77.00	4.50		85.20	74.80



Ordering Information:

C4201HFI-2xXP - ^{**}/₂ - ^{**}/₃

1.Part NO.

2.Material:

(blank): Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(blank): Black

NAT: Natural

SPECIFICATIONS:


Current Rating: 13A AC,DC(Max)
(Maximum current up to 13A when
using the C4201F-TCA-HH series terminal)
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: PBT,UL94V-0(Black)

CJTconn




CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	1:1	2 of 7	4.20mm Pitch Dual Row With Panel Mount Ears Housing	
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			C4201HFI-2xXP	A0


A1	CHANGE THE DRAWING	2021.01.20
A0	NEW RELEASE	2020.12.23
REV	DESCRIPTION	DATE

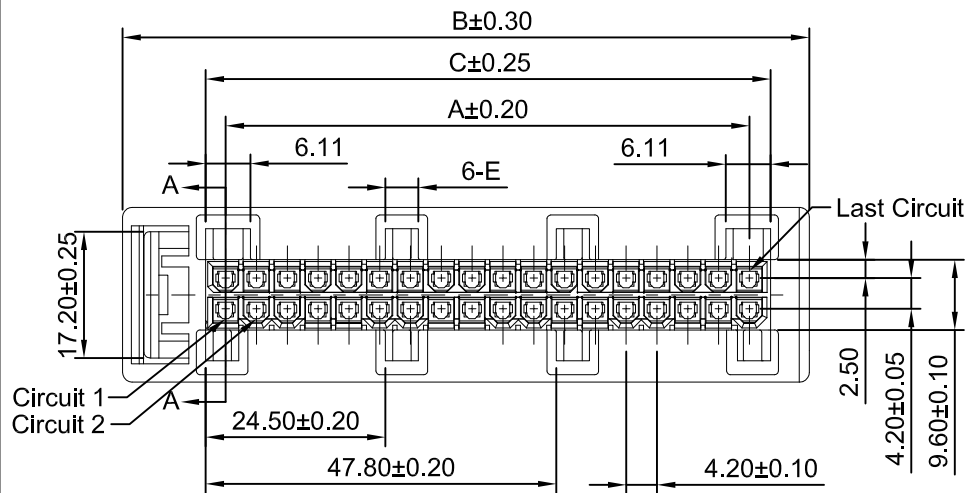

2x18P

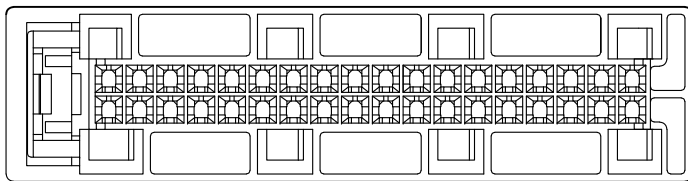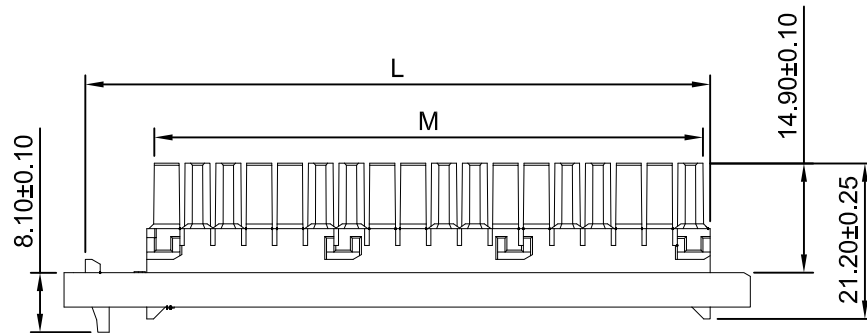

SECTION "A-A"

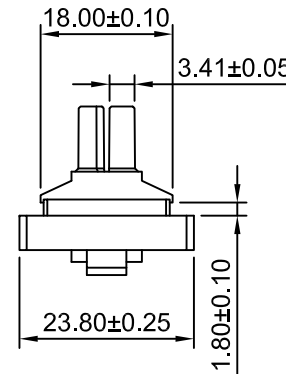

Ordering Information:

C4201HFI-2xXP - ** - **
1 2 3

1.Part NO.

2.Material:

(blank): Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(blank): Black

NAT: Natural

SPECIFICATIONS:

Current Rating: 13A AC,DC(Max)

(Maximum current up to 13A when
using the C4201F-TCA-HH series terminal)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel





Material: PBT,UL94V-0(Black)

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	1:1	3 of 7	4.20mm Pitch Dual Row With Panel Mount Ears Housing	
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25			C4201HFI-2xXP	A0
x.xxx±0.20				
x.xxxx±0.15				
ANGLES ±1°				


A1	CHANGE THE DRAWING	2021.01.20
A0	NEW RELEASE	2020.12.23
REV	DESCRIPTION	DATE

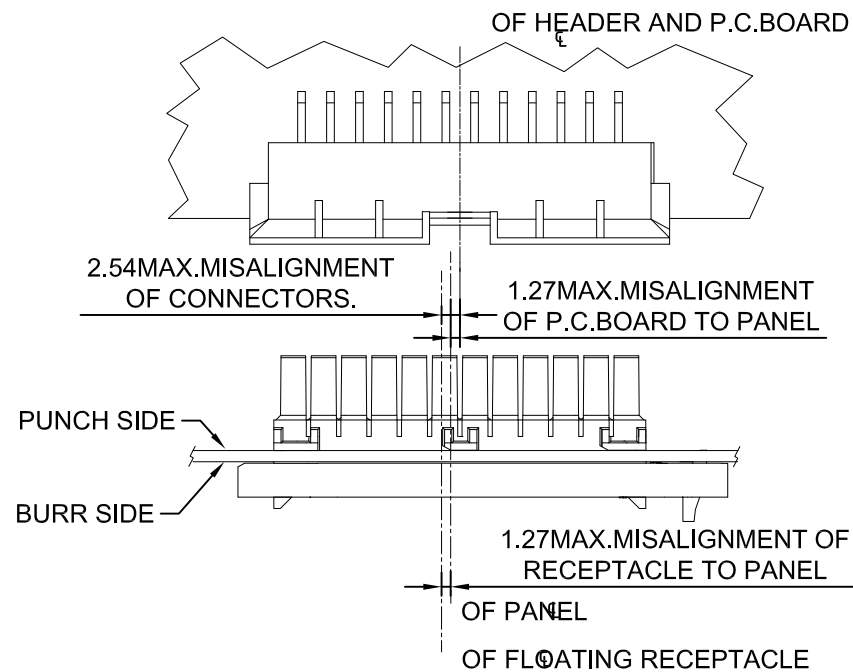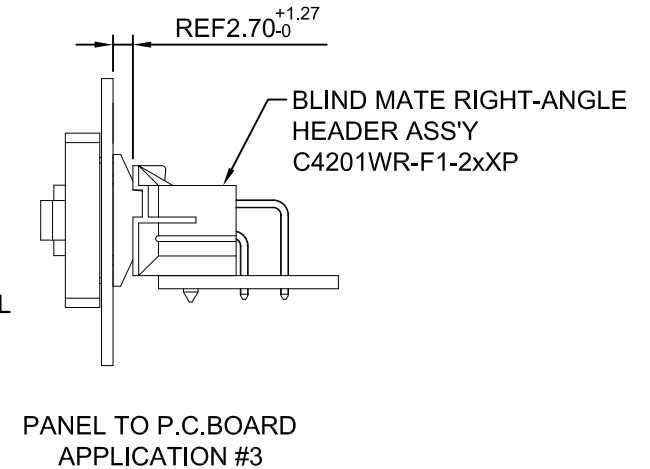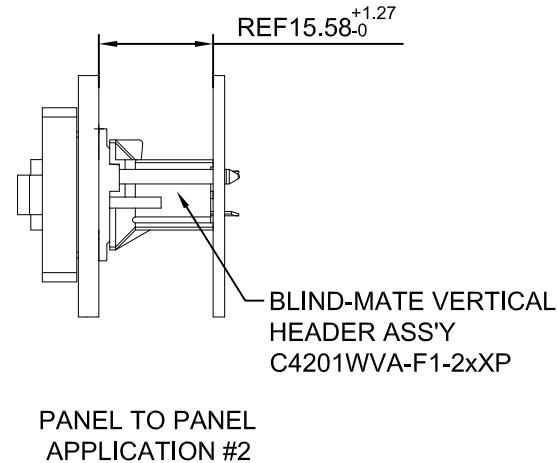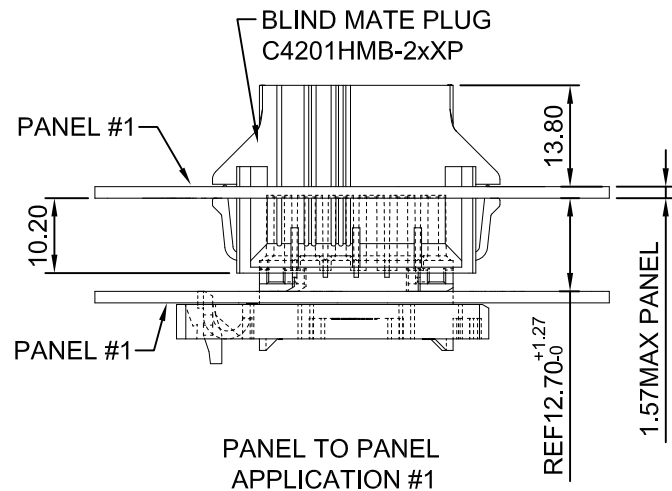


ALIGNMENT TOLERANCE FOR 1.27MAX.BOARD TO PANEL MISALIGNMENT
(± 1.27 RECEPTACLEFLOAT)

A1	CHANGE THE DRAWING	2021.01.20
A0	NEW RELEASE	2020.12.23
REV	DESCRIPTION	DATE


CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE 4.20mm Pitch Dual Row With Panel Mount Ears Housing	
mm	1:1	4 of 7		
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		 THIRD ANGLE PROJECTION	DRAWING NO.	
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			C4201HFI-2xXP	
			REV A0	




2x2P

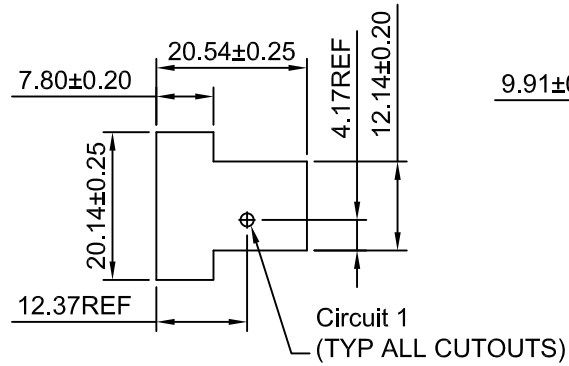


2x2P




2x3P

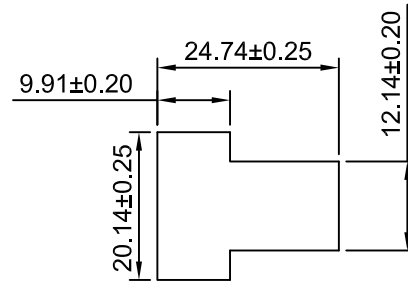


2x3P




2x4P

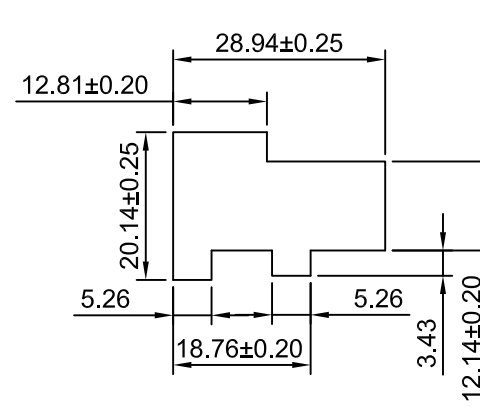


2x4P



2x5P

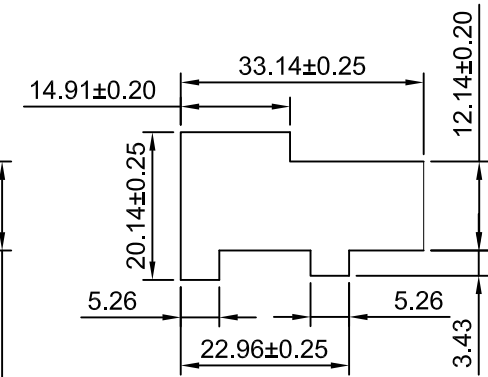


2x5P




2x7P

PANEL OPENING
RECOMMENDED PANEL THICKNESS
1.57/1.19

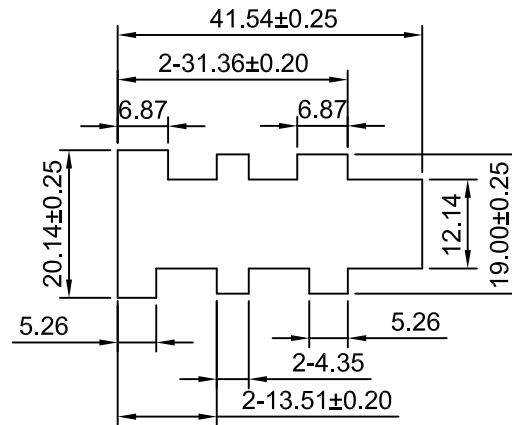


2x7P


CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	1:1	5 of 7	4.20mm Pitch Dual Row With Panel Mount Ears Housing
DRWN	CHK'D	APPR	
Wenmin Luo	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO.
			C4201HFI-2xXP
			REV A0

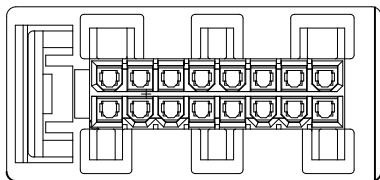


2x8P

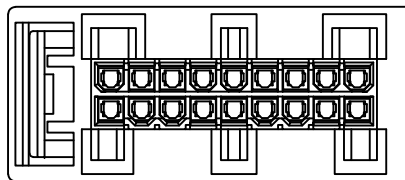


2x9P

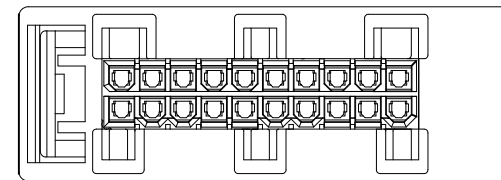


2x10P

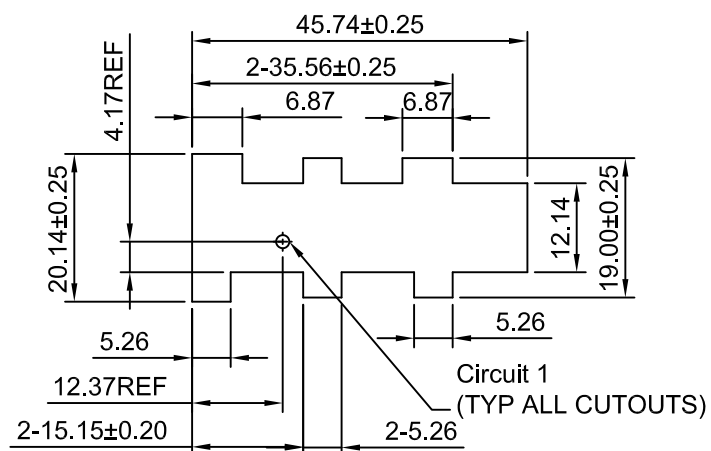

2x8P

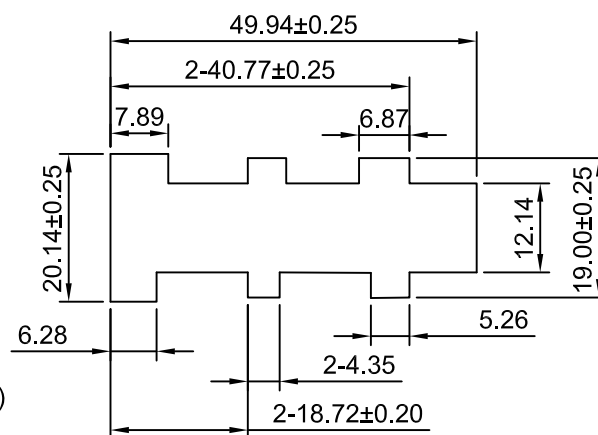







2x9P

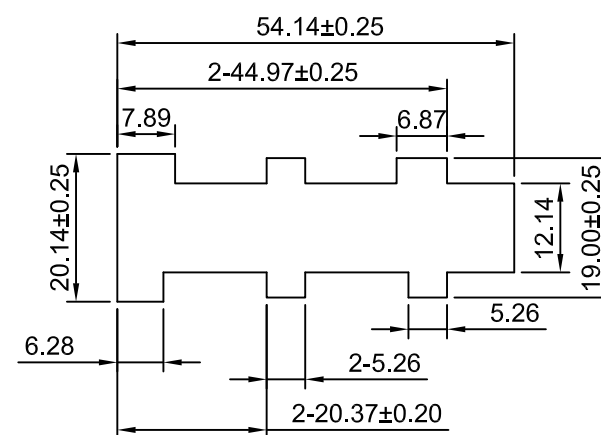

2x10P

PANEL OPENING
RECOMMENDED PANEL THICKNESS
1.57/1.19

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	1:1	6 of 7	4.20mm Pitch Dual Row With Panel Mount Ears Housing
DRWN	CHK'D	APPR	
Wenmin Luo	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			C4201HFI-2xXP
REV A0			

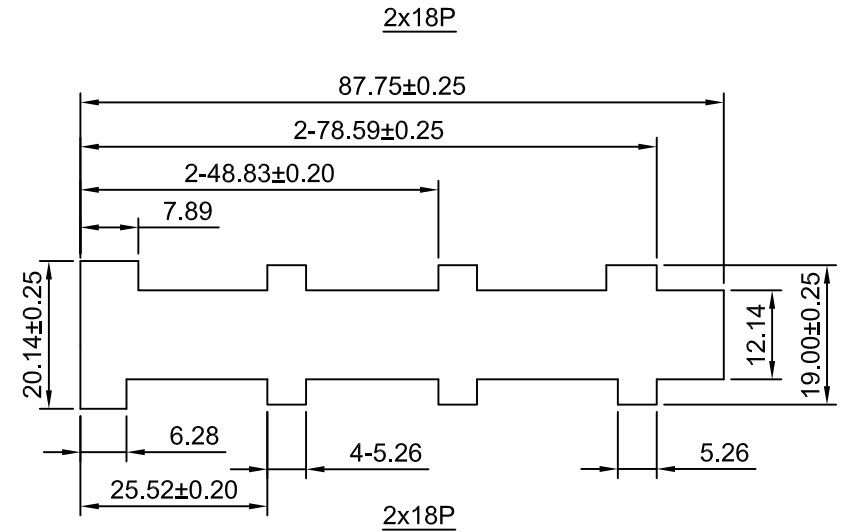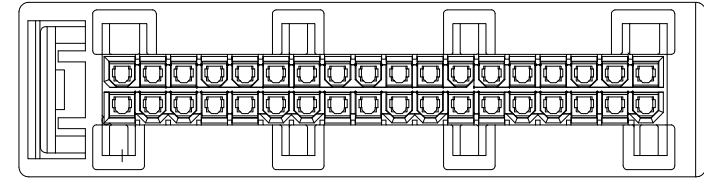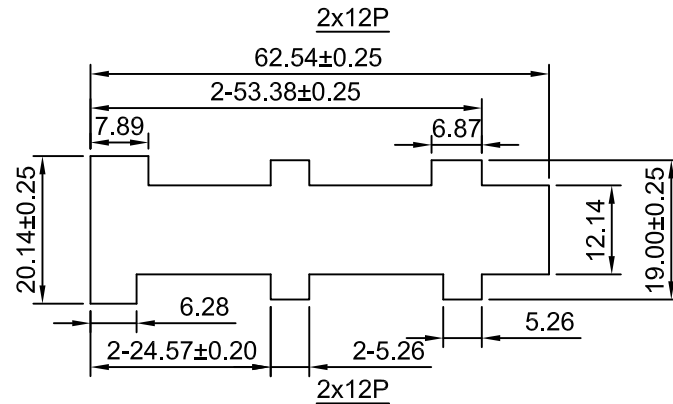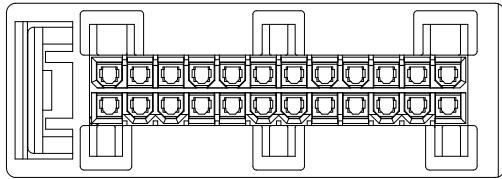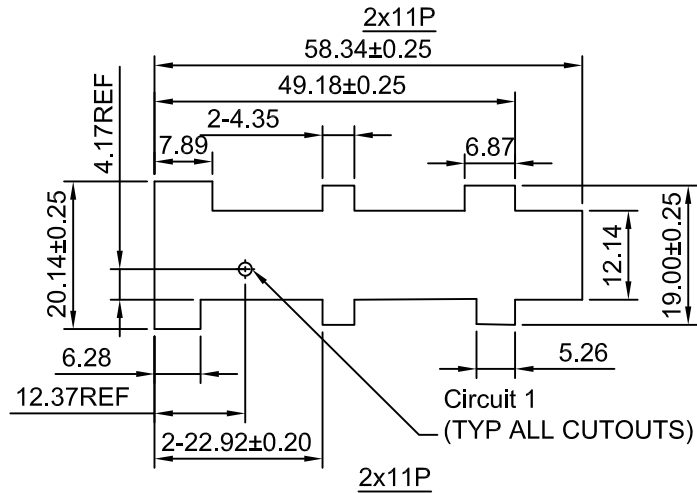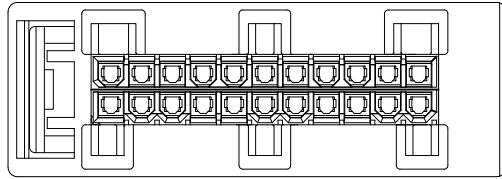

PANEL OPENING
RECOMMENDED PANEL THICKNESS
1.57/1.19

A1	CHANGE THE DRAWING	2021.01.20
A0	NEW RELEASE	2020.12.23
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit mm	Scale 1:1	Sheet 7 of 7	TITLE 4.20mm Pitch Dual Row With Panel Mount Ears Housing
DRWN Wenmin Luo	CHK'D Diankui Wan	APPR Jack Yin	
General Tolerances x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°		THIRD ANGLE PROJECTION 	
DRAWING NO. C4201HFI-2xXP			REV A0