
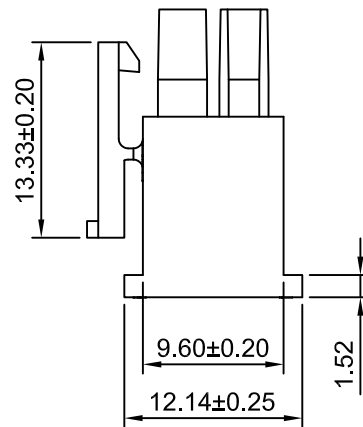
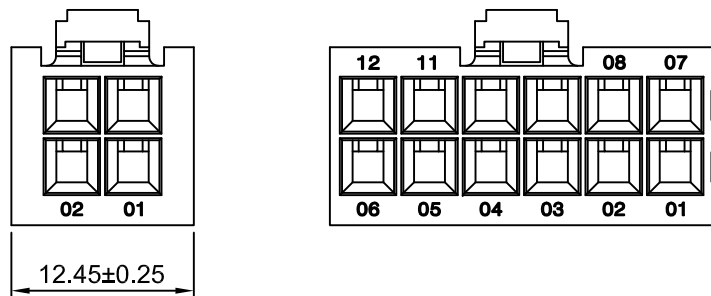
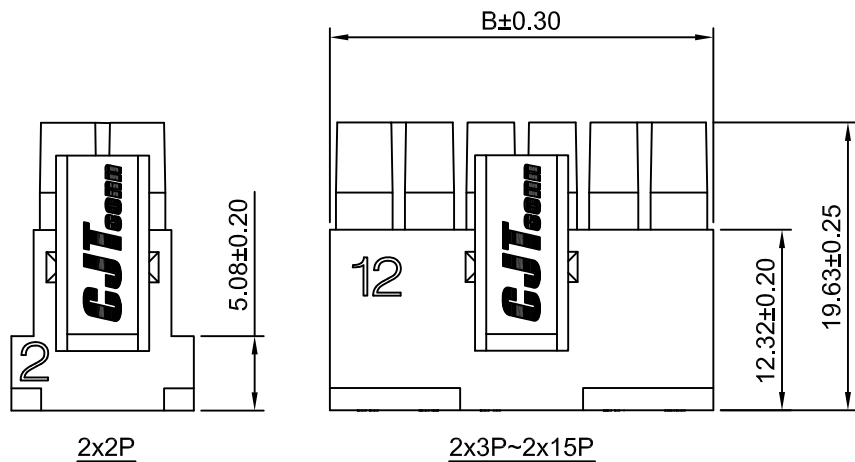


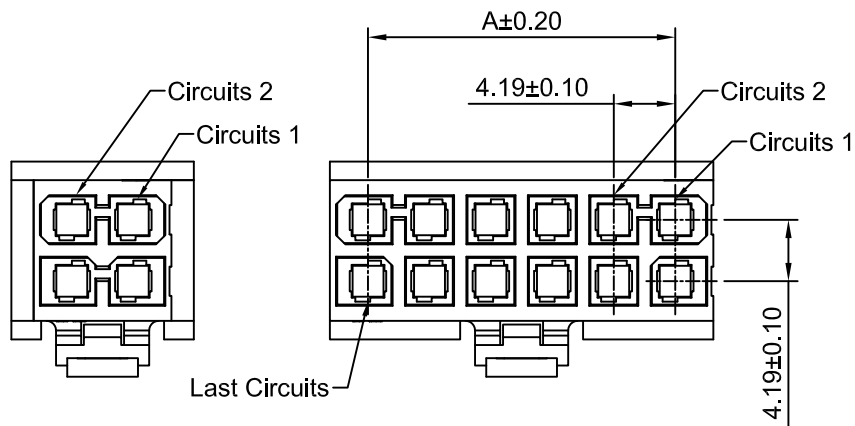

SPECIFICATIONS:

Current Rating: 9A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -55°C ~ +105°C
Contact Resistance: 10mΩ Max
After environmental testing: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	4.19	12.45	2x9P	33.52	38.73
2x3P	8.38	13.59	2x10P	37.71	42.92
2x4P	12.57	17.78	2x11P	41.90	47.11
2x5P	16.76	21.97	2x12P	46.09	51.30
2x6P	20.95	26.16	2x13P	50.28	55.49
2x7P	25.14	30.35	2x14P	54.47	59.68
2x8P	29.33	34.54	2x15P	58.66	63.87

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm
Scale: 2:1
Sheet: 1 of 1
DRAWN: CHK'D: APPR:
Chengbiao Ye Dianshui Wan Jack Yin

General Tolerances
x.xx±0.25
x.xxx±0.20
x.xxxx±0.15
ANGLES ±1°



TITLE
4.19mm PITCH
DUAL ROW HOUSING
DRAWING NO. C4201HFS-2xXP
REV A1

REV	DESCRIPTION	DATE
A1	CHANGE THE DRAWING	2023.02.21
A0	NEW RELEASE	2015.03.11