
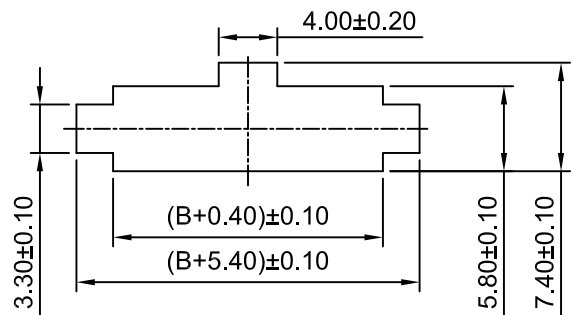
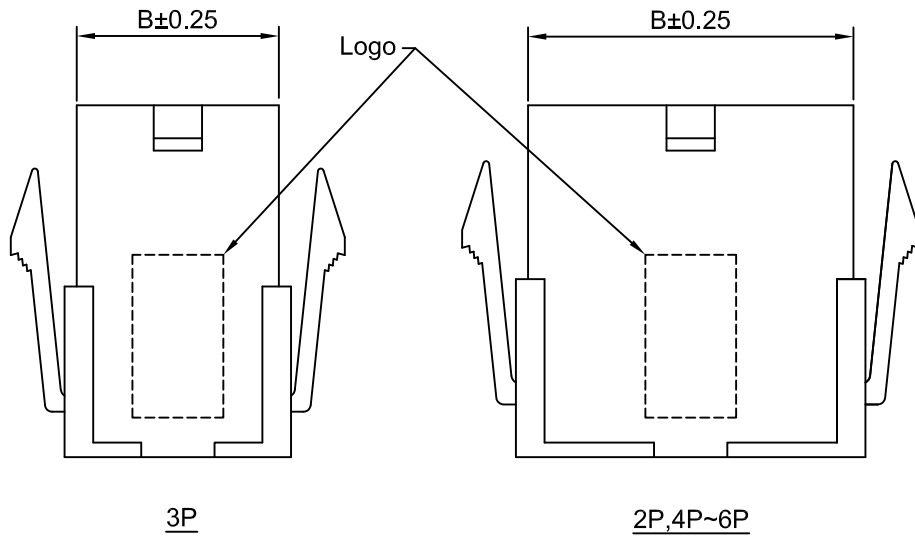

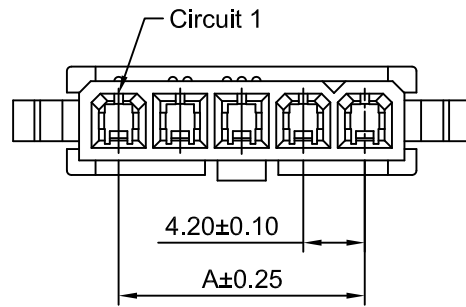


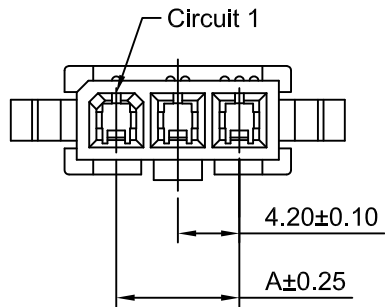

RECOMMENDED PANEL CUT-OUT
(DESIGNED FOR 0.80mm TO 2.00mm THICK
STAMPED PANEL OR PRINTED CIRCUIT BOARD)

Ordering Information:

C4201HM-XP - ** - ** - **
1 2 3 4

- Part NO.
- Material:
(Blank):Nylon 66 UL94V-2(Natural)
V0:Nylon 66 UL94V-0(White)
GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.
- Color:
(Blank):see section 2 material
BK:Black
RD:Red
YL:Yellow
BL:Blue
GN:Green
- Logo & Marking:
(Blank): Without LOGO
CJT: With LOGO

SPECIFICATIONS:

Current Rating: 13A AC,DC(Max)(Maximum current up to 13A when using the C4201M-TCA-HH series terminal)
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	4.20	9.60	5P	16.80	22.20
3P	8.40	13.80	6P	21.00	26.40
4P	12.60	18.00			

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2:1	1 of 1	4.20mm Pitch Single Row Housing
DRAWN	CHK'D	APPR	
Chengbiao Ye	Diankui Wan	Jack Yin	DRAWING NO. C4201HM-XP
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			REV A4

A4	JL-GC-ECN00353	2024.09.03
A3	CHANGE THE DRAWING	2023.03.13
A2	CHANGE THE INFORMATION	2019.12.14
A1	DELETE THE SIZE OF 7P~12P	2019.10.21
A0	NEW RELEASE	2012.11.13
REV	DESCRIPTION	DATE