

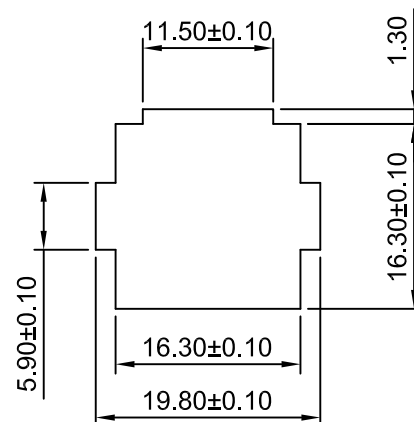
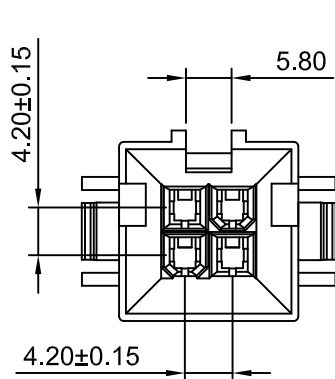


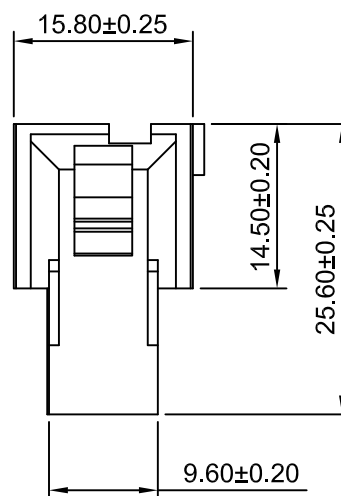

RECOMMENDED PANEL CUT-OUT
PANEL THICKNESS 1.60mm

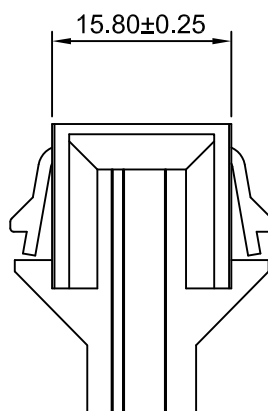

SPECIFICATIONS:

Current Rating: 13A AC,DC (MAX)(Maximum current up to 13A when using the C4201F-TCA-HH series terminal)
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Housing Material: Nylon 66,UL94V-2 (Natural)

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	1:5:1	1 of 1	4.20mm Pitch Dual Row Housing With Panel Mount Ears
DRWN	CHK'D	APPR	
Wenmin Luo	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°			C4201HMB-2x2P-A
A0	NEW RELEASE		
REV	DESCRIPTION	DATE	REV A0