

Ordering Information:

C4201HMB-2x3P-C - * - ***
1 2 3

1.Part No.

2.Material:

(Blank):Nylon 66 UL94V-2(Natural)

V0:Nylon 66 UL94V-0(White)

GWT:Nylon 66 UL94V-0(Beige), IEC 60335-1,5th
Edition Glow Wire Capable.

3.Color:

(Blank): see section 2 material

BK:Black

RD:Red

YL:Yellow

BL:Blue

GN:Green

SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min






Withstanding Voltage: 1500V AC/minute

CJTconn


CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	1.5:1	1 of 1	3.65x4.20mm Pitch Dual Row Housing With Panel Mount Ears	
DRAWN	CHK'D	APPR		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	DRAWING NO.
A1	CHANGE THE DRAWING	2023.10.31		C4201HMB-2x3P-C
A0	NEW RELEASE	2021.03.27		
REV	DESCRIPTION	DATE		
				REV A1

A1	CHANGE THE DRAWING	2023.10.31
A0	NEW RELEASE	2021.03.27
REV	DESCRIPTION	DATE

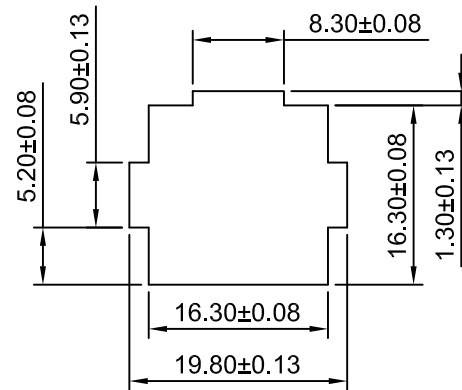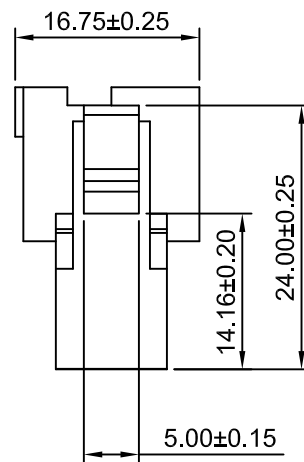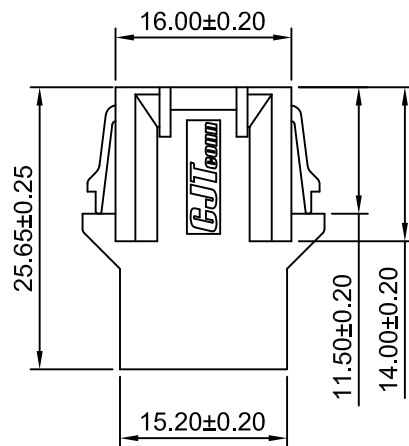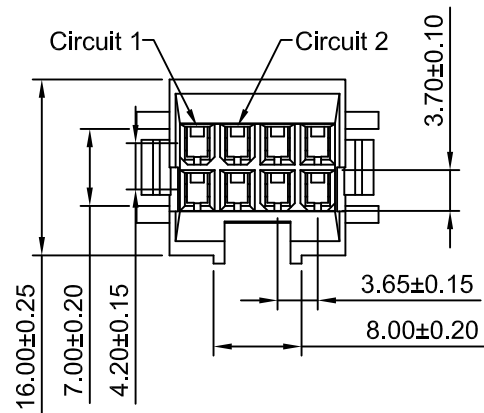

RECOMMENDED PCB CUTOUT
PANET THICKNESS 1.60

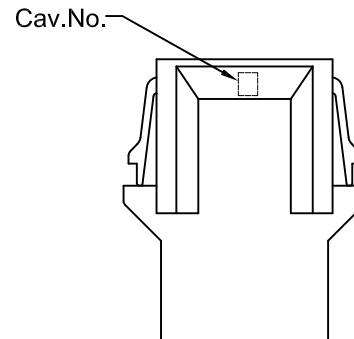

Ordering Information:
C4201HMB-2x4P-C - ^{**}/₂ - ^{**}/₃

- 1.Part NO.
- 2.Material:
(Blank): Nylon 66 UL94V-2 (Natural)
V0: Nylon 66 UL94V-0 (White)
GWT: Nylon 66,UL94V-0 (Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.
- 3.Color:
(Blank): see section 2 Material
BK:Black RD:Red
YL:Yellow BL:Blue
GN:Green

SPECIFICATIONS:
Current Rating: 5A AC,DC MAX (AWG#22)
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	1.5:1	1 of 1	3.65x4.20mm Pitch Dual Row Housing - Without Mount Ears
DRAWN	CHK'D	APPR	
Haisen Li	Djankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			DRAWING NO.
			C4201HMB-2x4P-C
			REV A1