
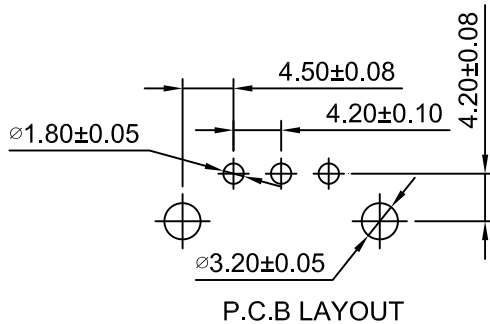
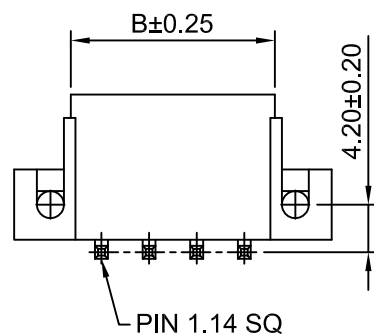


RECOMMENDED INSTALLATION

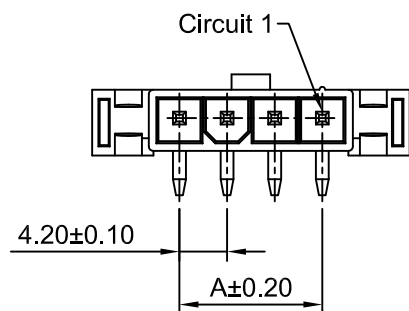

Ordering Information:

C4201WR-E-XP - *** - ** - ***
1 2 3 4

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-2

V0:Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750°C

46:Nylon 46,UL94V-0

9T:Nylon 9T,UL94V-0

LCP:LCP,UL94V-0

3.Color:

(blank):Natural

BK:Black

RD:Red

YL:Yellow

BL:Blue

GN:Green

4.Finish:


(blank):Tin over Nickel

G:Gold over Nickel(Au:1u")

G3:Gold over Nickel(Au:3u")

G15:Gold over Nickel(Au:15u")

G30:Gold over Nickel(Au:30u")

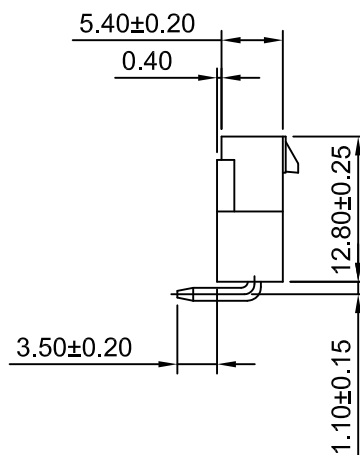

SPECIFICATIONS:

Current Rating: 13A AC,DC(Max)(Maximum current up to 13A when using the C4201F-TCA-HH series terminal)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	4.20	9.60	8P	29.40	34.80
3P	8.40	13.80	9P	33.60	39.00
4P	12.60	18.00	10P	37.80	43.20
5P	16.80	22.20	11P	42.00	47.40
6P	21.00	26.40	12P	46.20	51.60
7P	25.20	30.60			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit			Scale	Sheet	Title :			
mm			1.5:1	1 of 1				
Draw By:			Approved :			4.20mm Pitch 90° Single Row Wafer With Ear		
Diankui Wan			Jack Yin					
General Tolerance								
x.x±0.25 x.xx±0.20 x.xxx±0.15			PROJECT 					
DRAW NO :						C4201WR-E-XP		REV A3