


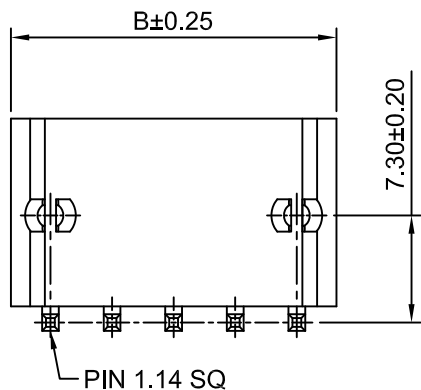
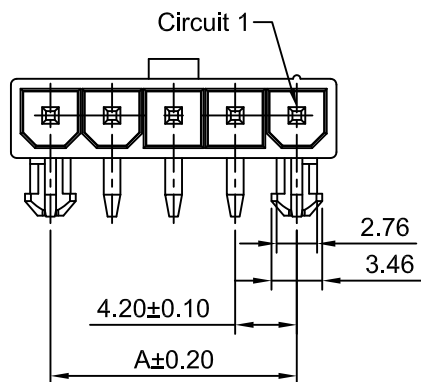


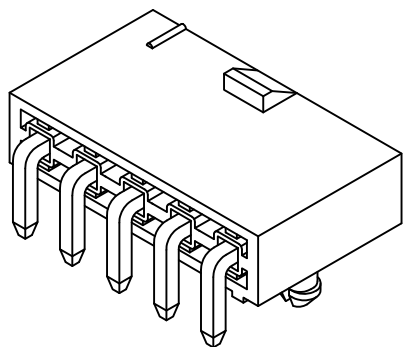

3P~12P



2P

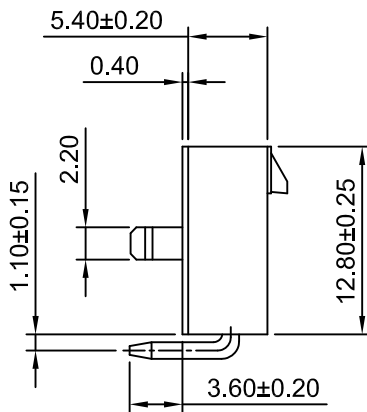

Ordering Information:

C4201WR-F-XP - *** - ** - ***
1 2 3 4

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-2

V0:Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750°C

46:Nylon 46,UL94V-0

9T:Nylon 9T,UL94V-0

LCP:LCP,UL94V-0

3.Color:

(blank):Natural

BK:Black

RD:Red

YL:Yellow

BL:Blue

GN:Green

4.Finish:


(blank):Tin over Nickel

G:Gold over Nickel(Au:1u")


G3:Gold over Nickel(Au:3u")

G15:Gold over Nickel(Au:15u")

G30:Gold over Nickel(Au:30u")

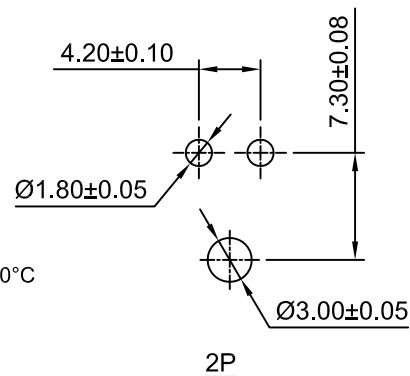

2P

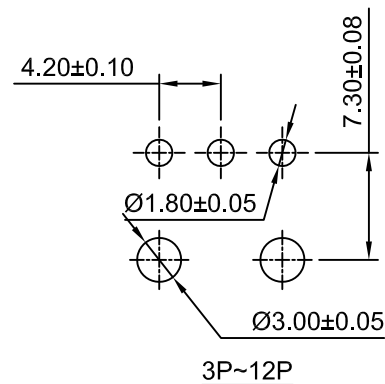

3P~12P

P.C.B LAYOUT

SPECIFICATIONS:

Current Rating: 13A AC,DC(Max)(Maximum current up to 13A when using the C4201F-TCA-HH series terminal)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	4.20	9.60	8P	29.40	34.80
3P	8.40	13.80	9P	33.60	39.00
4P	12.60	18.00	10P	37.80	43.20
5P	16.80	22.20	11P	42.00	47.40
6P	21.00	26.40	12P	46.20	51.60
7P	25.20	30.60	...	...	...

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 4.20mm PITCH 90° SINGLE ROW WAFER WITH FOOT			
mm		2:1		1 of 1					
DRWN		CHK'D		APPR					
Dengchun Yi		Diankui Wan		Jack Yin		DRAWING NO. C4201WR-F-XP		REV A3	
General Tolerances				THIRD ANGLE PROJECTION					
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°									