

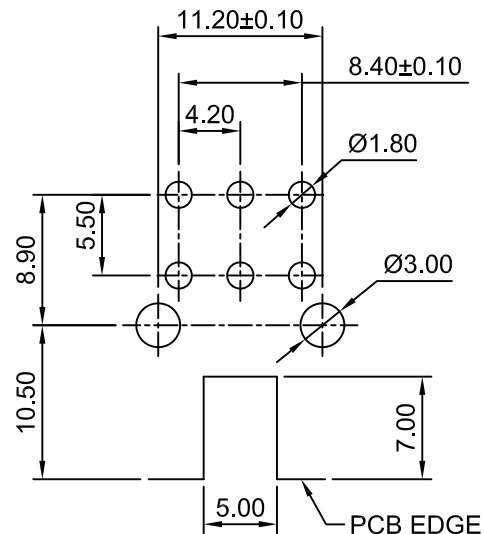


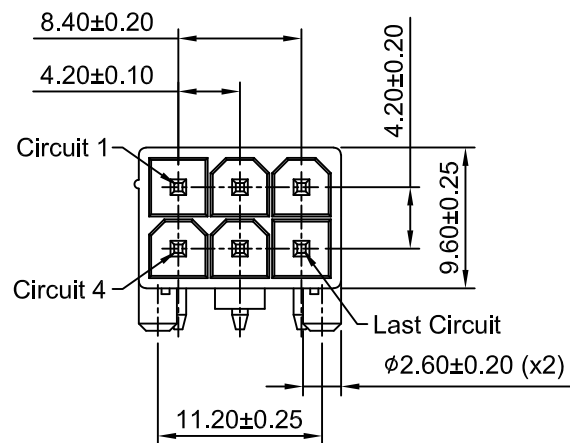

P.C.B LAYOUT
TOLERANCE:±0.05



Ordering Information:

C4201WR-F2-2x3P-A-R - ***

1 2

1.Part NO.

2.Finish:

(blank): Matte Tin over Nickel

G: Gold over Nickel(Au:1u")

G3: Gold over Nickel(Au:3u")

G15: Gold over Nickel(Au:15u")

G30: Gold over Nickel(Au:30u")

SPECIFICATIONS:

Current Rating: 13A AC,DC(Max)(Maximum current up to 13A when using the C4201F-TCA-HH series terminal)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C



Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Matte Tin over Nickel

Material: LCP,UL94V-0(Black)

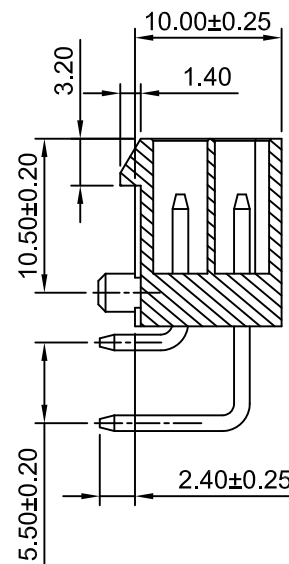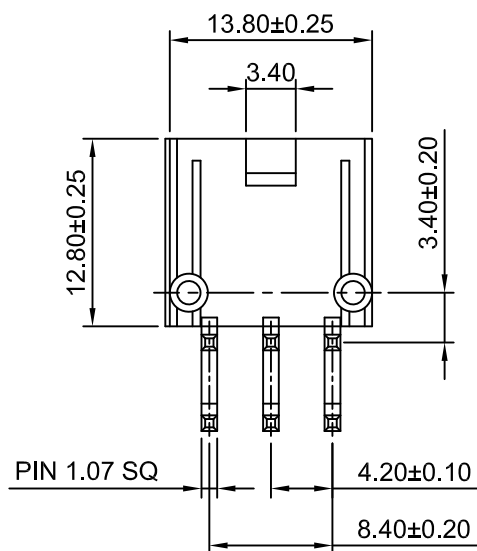

A0	NEW RELEASE	2021.04.06
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.		
Unit	Scale	Sheet
mm	2:1	1 of 1
DRWN	CHK'D	APPR
Wenmin Luo	Diankui Wan	Jack Yin
General Tolerances		
THIRD ANGLE PROJECTION		
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°		
TITLE		
4.20MM PITCH 90° DUAL ROW WAFER WITH FOOT -SPECIAL TYPE		
DRAWING NO.		REV
C4201WR-F2-2x3P-A-R		A0