

Ordering Information:

C4201WR-F3-2x4P-A - ^{***}2 - ^{***}3

1. Part NO.

2.Finish:

(Blank): Matte Tin over Nickel

G:Gold over Nickel(Au:1μin[0.03μm] Min)

G3: Gold over Nickel(Au:3μin[0.08μm] Min,Mating Area)


G15: Gold over Nickel(Au:15μin[0.38μm] Min,Mating Area)

G30: Gold over Nickel(Au:30 μ in[0.76 μ m] Min,Mating Area)

3. Packing:

(Blank): Tray

RE: Tape & Reel

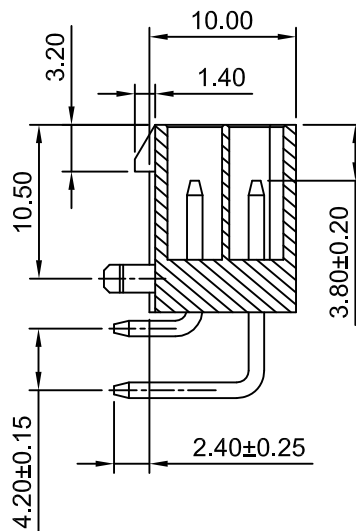

SPECIFICATIONS:

Current Rating: 13A AC,DC(Max)(Maximum current up to 13A when using the C4201F-TCA-HH series terminal)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max


Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute


Pin Material: Brass

Material: LCP,UL94V-0(Black)

			CHANGJIANG CONNECTORS CO., LTD.		
Unit		Scale	Sheet	TITLE	
mm		2:1	1 of 2	4.20mm PITCH	
2	DRAWN	CHK'D	APPR	RIGHT-ANGLE DUAL ROW WAFER	
8	Haisen Li	Diankui Wan	Jack Yin	WITH FOOT-SPECIAL TYPE	
0	General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	
5	x, x±0.25			REV	
4	x, x±0.20			A4	
	x, xxx±0.15 ANGLES ±1°			C4201WR-F3-2x4P-A	

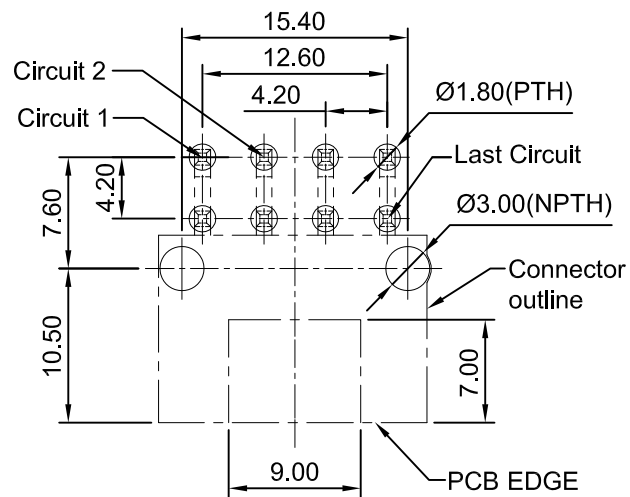

RECOMMEND P.C.B LAYOUT(DIP)
TOLERANCE ± 0.05
TOP VIEW

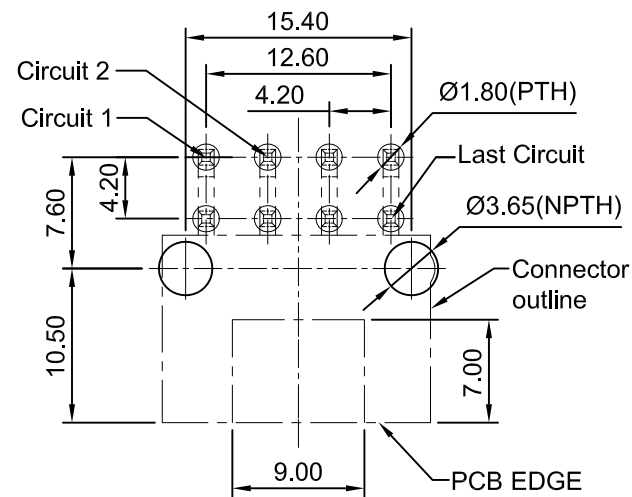

RECOMMEND P.C.B LAYOUT(PIP)
TOLERANCE ± 0.05
TOP VIEW

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.		
Unit	Scale	Sheet	TITLE		
mm	2:1	2 of 2			
DRAWN	CHK'D	APPR	4.20mm PITCH RIGHT-ANGLE DUAL ROW WAFER WITH FOOT-SPECIAL TYPE		
Haisen Li	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION			
x.x±0.25					
x.xxx±0.15					
ANGLES ±1°		DRAWING NO.	REV A4		
			C4201WR-F3-2x4P-A		