



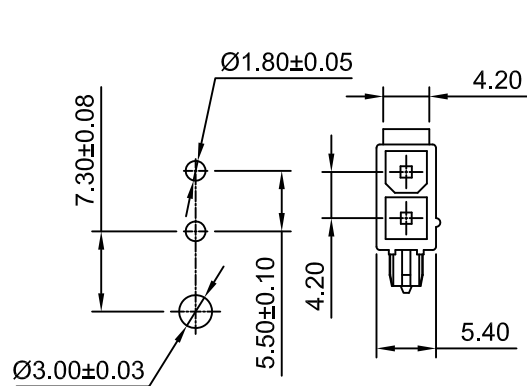


P.C.B LAYOUT
2x1P

2x1P

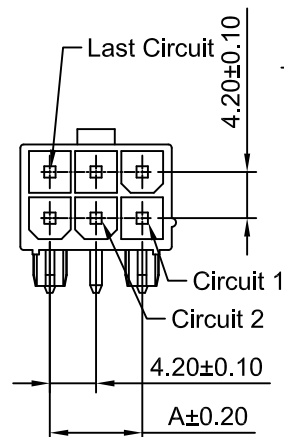

2x3P~2x12P

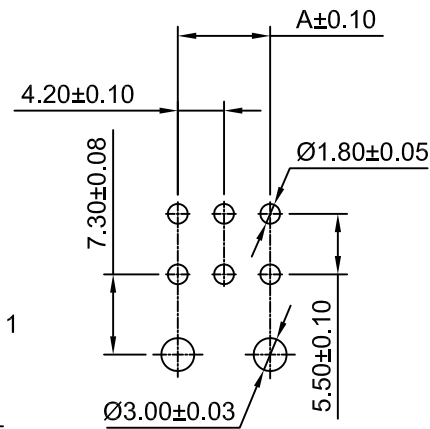

P.C.B LAYOUT
2x3P~2x12P

Ordering Information:
C4201WRG-F-2xXP - ** - ***
1 2 3

- Part No.
- Material:
(blank): LCP, UL94V-0 (Black)
6T: Nylon 6T, UL94V-0 (Ivory)
9T: Nylon 9T, UL94V-0 (Ivory)
- Finish:
(blank): Tin over Nickel
G: Gold over Nickel
G30: Gold over Nickel (Au=30u")

SPECIFICATIONS:

Current Rating: 13A AC, DC
Voltage Rating: 600V AC, DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: LCP, UL94V-0 (Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	---	5.40	2x7P	25.20	30.60
2x2P	4.20	9.60	2x8P	29.40	34.80
2x3P	8.40	13.80	2x9P	33.60	39.00
2x4P	12.60	18.00	2x10P	37.80	43.20
2x5P	16.80	22.20	2x11P	42.00	47.40
2x6P	21.00	26.40	2x12P	46.20	51.60

CJTconn

CHANGJIANG CONNECTORS CO., LTD.

Unit	Scale	Sheet
mm	1.5:1	1 of 1
Draw By:		Approved:
Dlankul Wan		Jack Yin

Title:


4.20mm Pitch

90° Dual Row Wafer

General Tolerance

A1	ADD THE SIZE	2019.03.27	x.xx±0.25	PROJECT DRAW NO: C4201WRG-F-2xXP
A0	NEW RELEASE	2018.12.27	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	

REV A1

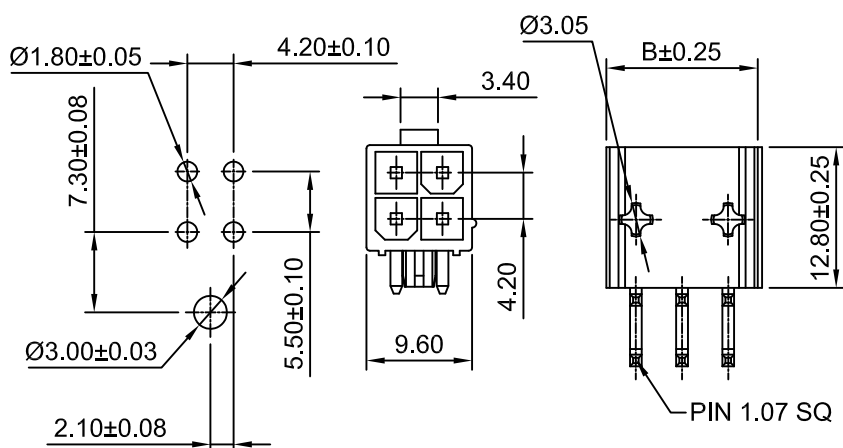

P.C.B LAYOUT
2x2P

2x2P

