
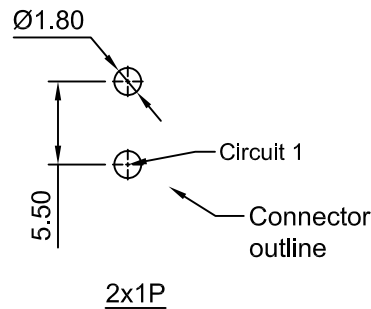
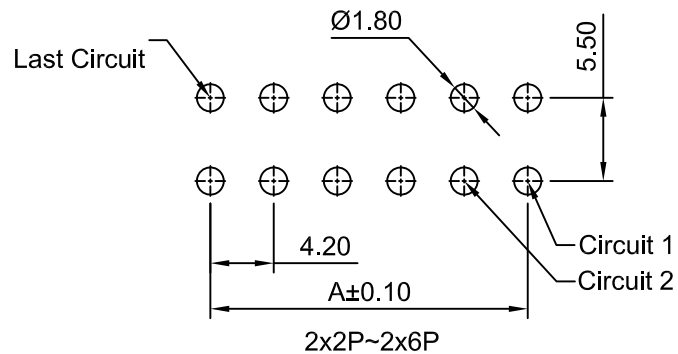
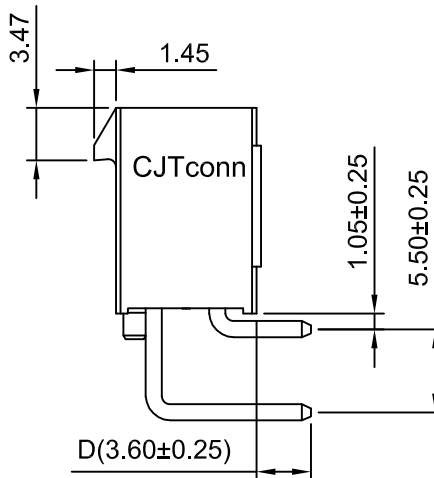
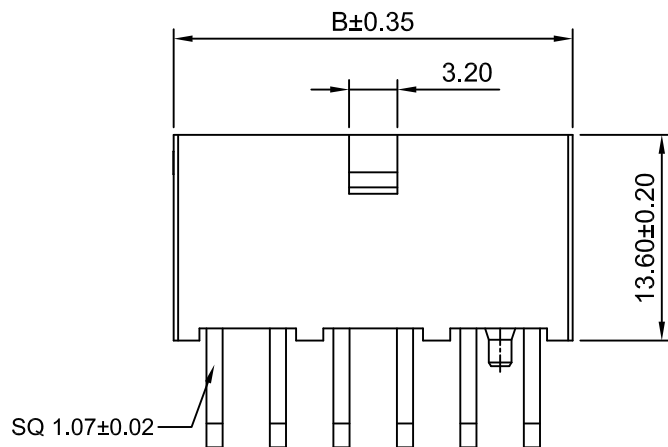
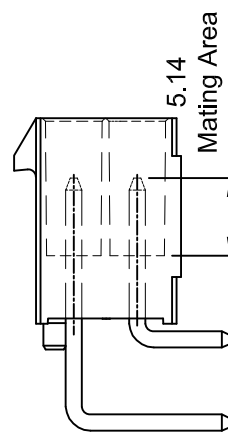


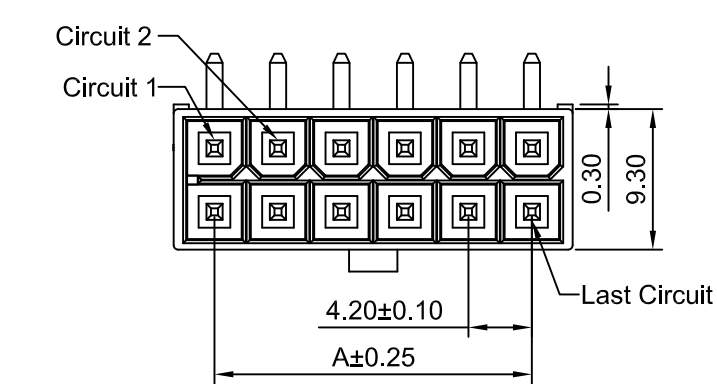

P.C.B LAYOUT(TOP VIEW)
TOLERANCE:±0.05

Ordering Information:

C4201WRH-2xXP - ** - ** - ** - ** - **
1 2 3 4 5 6

1.Part NO.

2.Material:

(Blank): LCP,UL94V-0,IEC 60335-1,
5th Edition Glow Wire Capable.

3.Color:

(Blank): Black

NAT: Natural

4.Finish:

(Blank):Tin over Nickel

G:Gold over Nickel(Au:1µin[0.03µm] Min)

G10: Gold over Nickel(Au:10µin[0.25µm] Min,Mating Area)

G15: Gold over Nickel(Au:15µin[0.38µm] Min,Mating Area)

G30: Gold over Nickel(Au:30µin[0.76µm] Min,Mating Area)

5.Size D:

(Blank): 3.60mm

D45: 4.50mm

D53: 5.30mm

D71: 7.10mm

6.Packing:

(Blank): Bag

RE: Tape & Reel

SPECIFICATIONS:

Current Rating: 20A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 2200 AC/minute

Pin Material: Brass

Ordering Information & Dimensions


Part NO.	Dimensions(mm)	
	A	B
C4201WRH-2x1P	—	5.40
C4201WRH-2x2P	4.20	9.60
C4201WRH-2x3P	8.40	13.80
C4201WRH-2x4P	12.60	18.00
C4201WRH-2x5P	16.80	22.20
C4201WRH-2x6P	21.00	26.40

CJTconn


CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 4.20mm PITCH RIGHT-ANGLE DUAL ROW WAFER	
mm	2:1	1 of 2		
DRAWN	CHK'D	APPR'D		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION 	DRAWING NO.	REV A0
x.xx±0.25				
x.xxx±0.20				
x.xxx±0.15				
ANGLES ±1°			C4201WRH-2xXP	


A0	NEW RELEASE	2025.02.07
REV	DESCRIPTION	DATE




2x1P




2x2P




2x3P

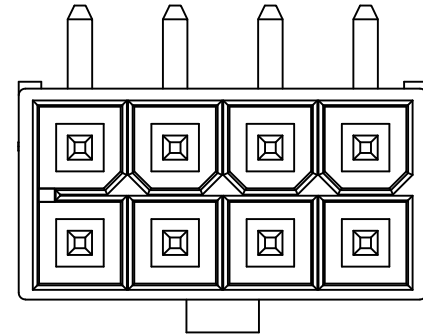

2x4P

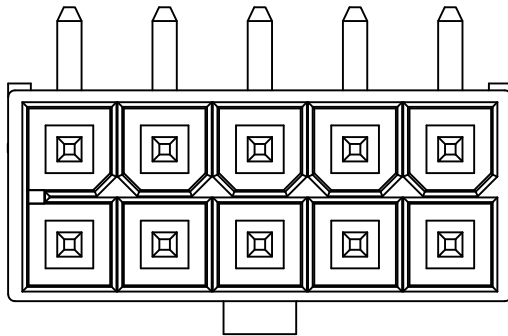

2x5P

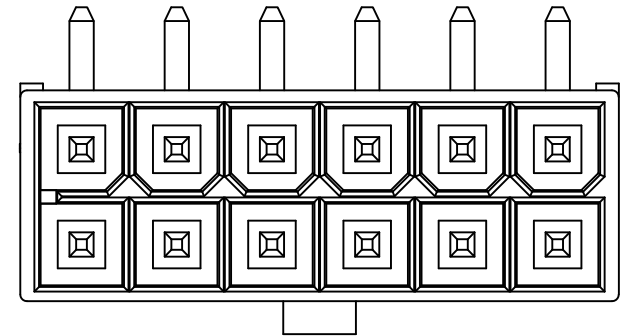

2x6P

CJT*conn*

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 4.20mm PITCH RIGHT-ANGLE DUAL ROW WAFER	
mm	3:1	2 of 2		
DRAWN	CHK'D	APPR'D	DRAWING NO. C4201WRH-2xXP	
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	REV A0	
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°				

A0	NEW RELEASE	2025.02.07
REV	DESCRIPTION	DATE

A0	NEW RELEASE	2025.02.07
REV	DESCRIPTION	DATE