

Ordering Information:

C4201WRH-XP - ** - ** - ** - ** - **
1 2 3 4 5 6

- 1.Part NO.
2.Material:
(Blank): LCP,UL94V-0,IEC 60335-1,
5th Edition Glow Wire Capable.
3.Color:
(Blank): Black
NAT: Natural
4.Finish:
(Blank):Tin over Nickel
G:Gold over Nickel(Au:1µin[0.03µm] Min)
G10: Gold over Nickel(Au:10µin[0.25µm] Min,Mating Area)
G15: Gold over Nickel(Au:15µin[0.38µm] Min,Mating Area)
G30: Gold over Nickel(Au:30µin[0.76µm] Min,Mating Area)
5.Size D:
(Blank): 3.60mm
D45: 4.50mm
D53: 5.30mm
D71: 7.10mm
6.Packing:
(Blank): Bag
RE: Tape & Reel with

SPECIFICATIONS:

Current Rating: 20A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 2200 AC/minute
Pin Material: Brass





Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C4201WRH-2P	4.20	10.10
C4201WRH-3P	8.40	13.80
C4201WRH-4P	12.60	18.00
C4201WRH-5P	16.80	22.20
C4201WRH-6P	21.00	26.40


CJTconn

CHANGJIANG CONNECTORS CO.,LTD.


Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 2	4.20mm PITCH RIGHT-ANGLE SINGLE ROW DIP WAFER	
DRAWN	CHK'D	APPR'D		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			C4201WRH-XP	
A0	NEW RELEASE	2025.02.07	REV A0	
REV	DESCRIPTION	DATE		

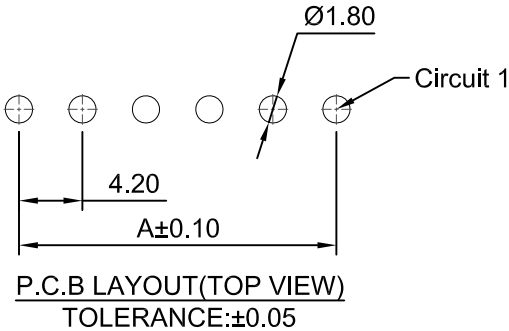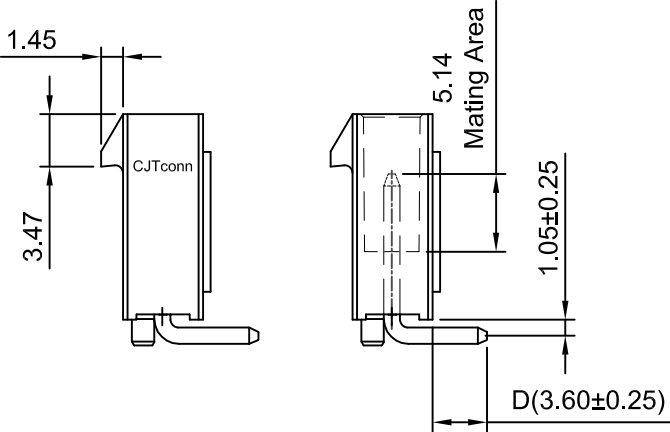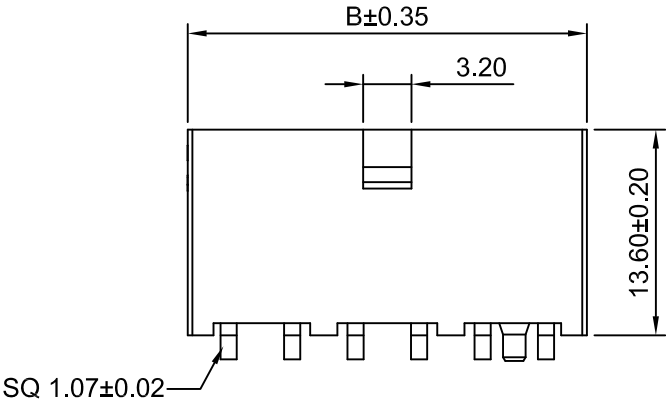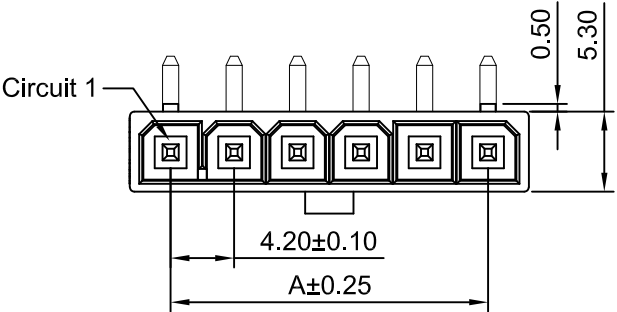


A0	NEW RELEASE	2025.02.07
REV	DESCRIPTION	DATE




2P




3P

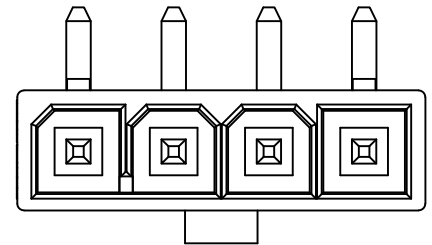

4P

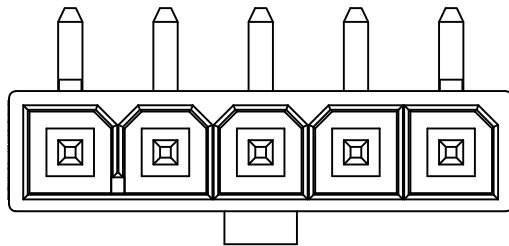

5P

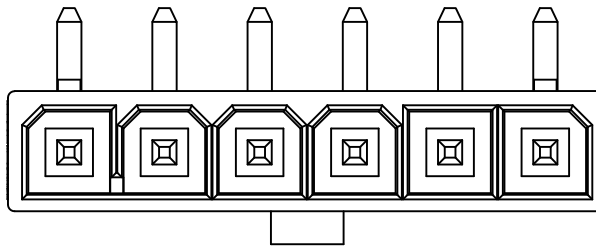

6P

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE 4.20mm PITCH RIGHT-ANGLE SINGLE ROW DIP WAFER
mm	3:1	2 of 2	
DRAWN Haisen Li	CHK'D Diankui Wan	APPR'D Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C4201WRH-XP
x,x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			
REV	DESCRIPTION	DATE	REV A0
A0	NEW RELEASE	2025.02.07	