




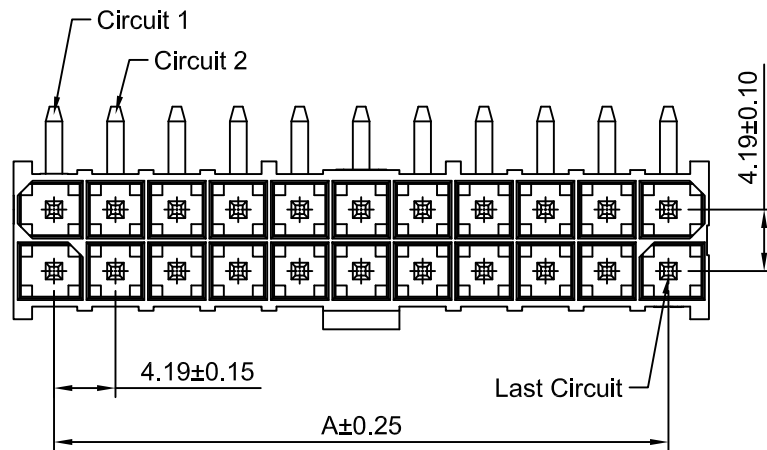


2x3P~2x15P
ODD POSITIONS

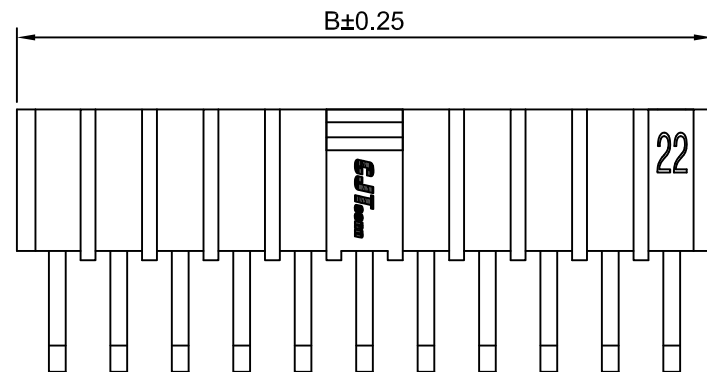


A±0.10

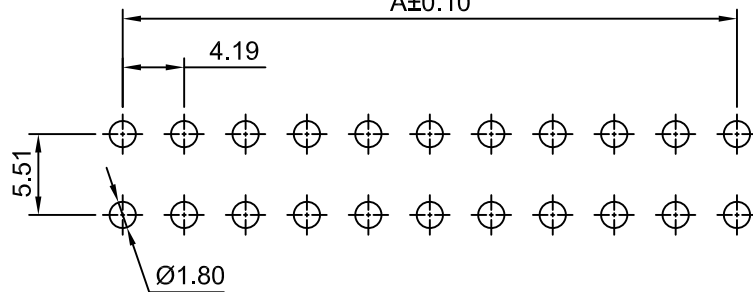

P.C.B LAYOUT
TOLERANCE:±0.05

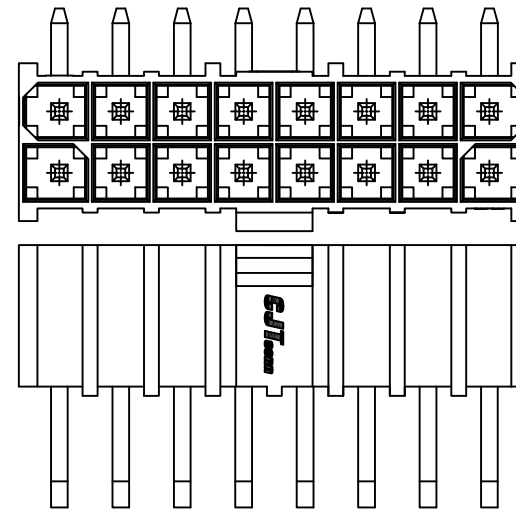

2x2P~2x14P
EVEN POSITIONS

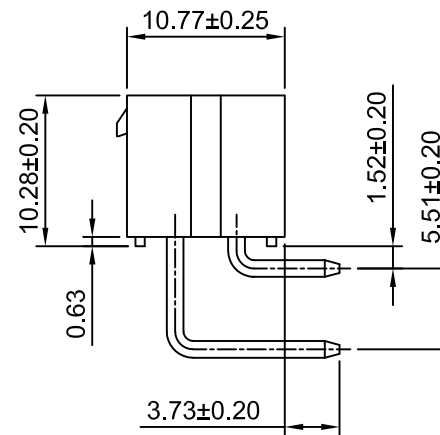

Ordering Information:

C4201WRSB-2xXP - ** - **
1 2 3

1.Part NO.

2.Color:

(Blank): Black

IV: Ivory

3.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -55°C ~ +105°C

Contact Resistance: 10mΩ Max

After environmental testing: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material:Brass

Material: LCP,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C4201WRSB-2x2P	4.19	9.72
C4201WRSB-2x3P	8.38	13.91
C4201WRSB-2x4P	12.57	18.10
C4201WRSB-2x5P	16.76	22.29
C4201WRSB-2x6P	20.95	26.48
C4201WRSB-2x7P	25.14	30.67
C4201WRSB-2x8P	29.33	34.86
C4201WRSB-2x9P	33.52	39.05
C4201WRSB-2x10P	37.71	43.24
C4201WRSB-2x11P	41.90	47.43
C4201WRSB-2x12P	46.09	51.62
C4201WRSB-2x13P	50.28	55.81
C4201WRSB-2x14P	54.47	60.00
C4201WRSB-2x15P	58.66	64.19

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1		
DRWN	CHK'D	APPR	4.19mm PITCH 90° DUAL ROW DIP WAFER	
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C4201WRSB-2xXP	
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°				
			REV A3	

A3	CHANGE THE DRAWING	2022.01.06
A2	CHANGE THE DRAWING	2020.09.08
A1	CHANGE THE DRAWING	2019.11.30
A0	NEW RELEASE	2015.03.11
REV	DESCRIPTION	DATE