

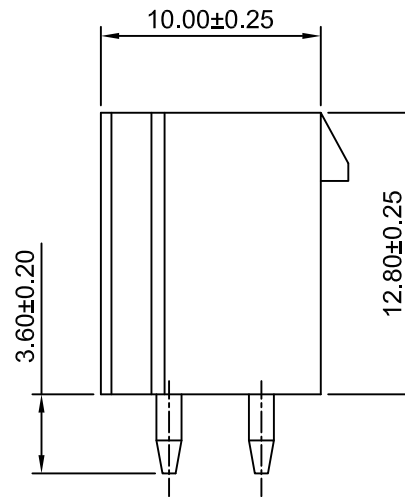
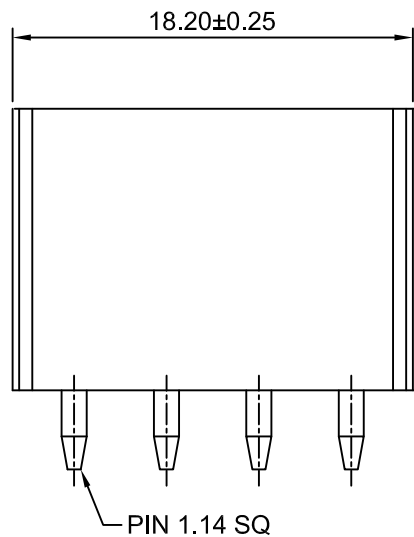
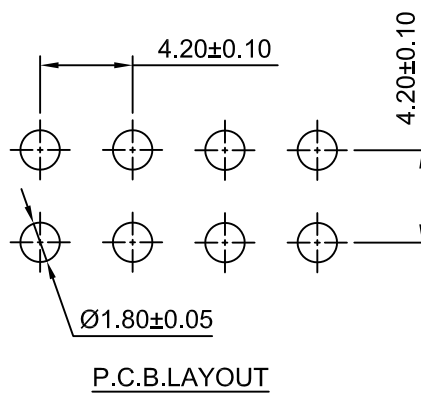


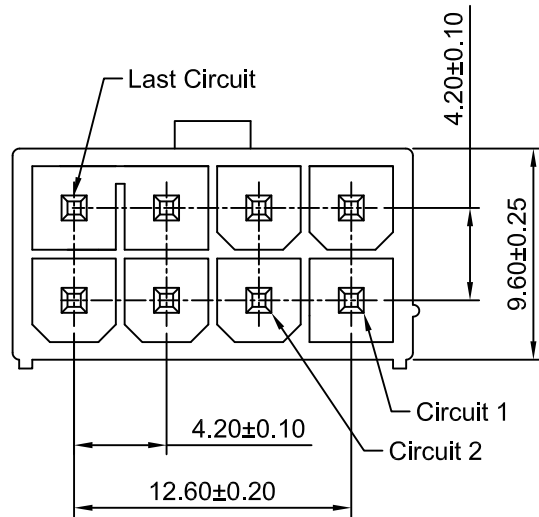

Ordering Information:
C4201WV-2x4P-A - *** - ***
1 2 3

- 1.Part No.
2.Material:
(blank);Nylon 66,UL94V-2
V0:Nylon 66,UL94V-0
LCP:LCP,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750°C
3.Color:
(blank);Black
NAT:Natural
WH:White
RD:Red
YL:Yellow
BL:Blue

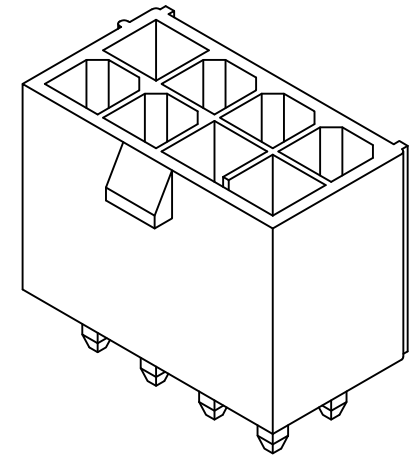

SPECIFICATIONS:
Current Rating: 13A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-2(Black)

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1
Draw By:		Approved:
Dinakui Wan		Jack Yin

Title :
4.20mm PITCH
180° DUAL ROW WAFER
- SPECIAL TYPE

A2	CHANGE THE DRAWING	2022.08.10
A1	CHANGE THE INFORMATION	2019.10.28
A0	NEW RELEASE	2012.11.14
REV	DESCRIPTION	DATE

General Tolerance
x.x±0.25
x.xx±0.20
x.xxx±0.15
PROJECT

DRAW NO : C4201WV-2x4P-A

REV
A2