

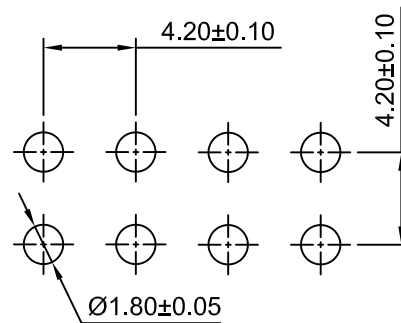
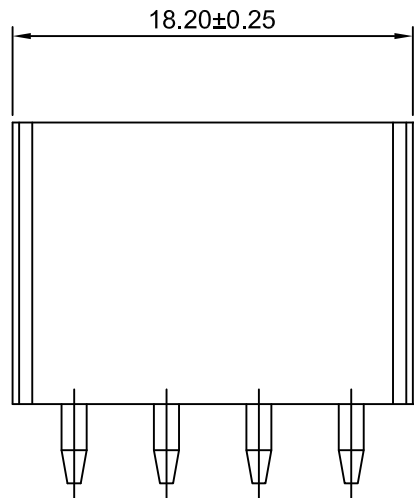


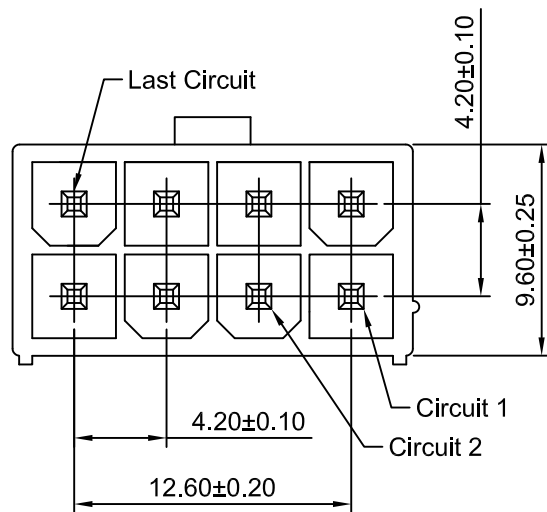

P.C.B LAYOUT

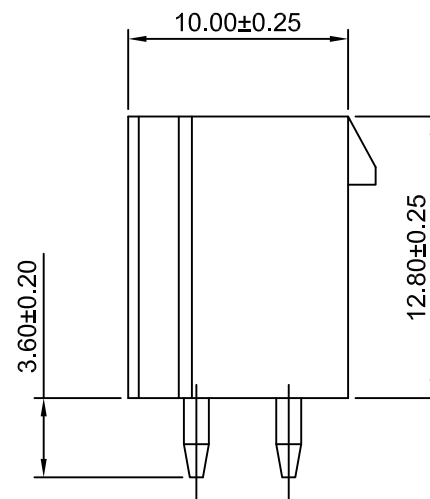

Ordering Information:

C4201WV-2x4P-B - *** - ***

1 2 3

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-2

V0:Nylon 66,UL94V-0

LCP:LCP,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750°C

3.Color:

(blank):Black


NAT:Natural

WH:White

RD:Red

YL:Yellow

BL:Blue

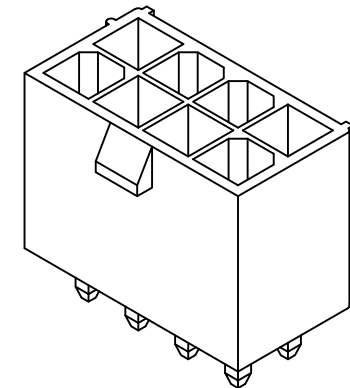

SPECIFICATIONS:

Current Rating: 13A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-2(Black)

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1
Draw By:	Approved :	
Diankui Wan	Jack Yin	

Title :

**4.20mm PITCH
180° DUAL ROW WAFER
- SPECIAL TYPE**

A2	CHANGE THE DRAWING	2022.08.10	General Tolerance	
A1	CHANGE THE INFORMATION	2019.10.28	x.x±0.25	PROJECT
A0	NEW RELEASE	2012.11.14	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	

DRAW NO : C4201WV-2x4P-B

REV
A2