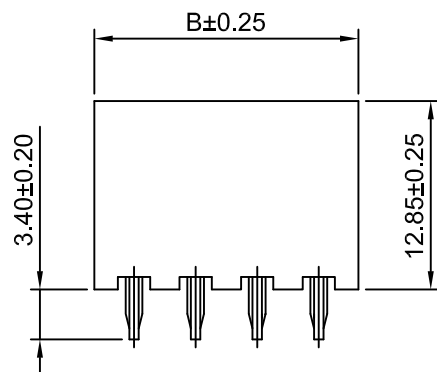
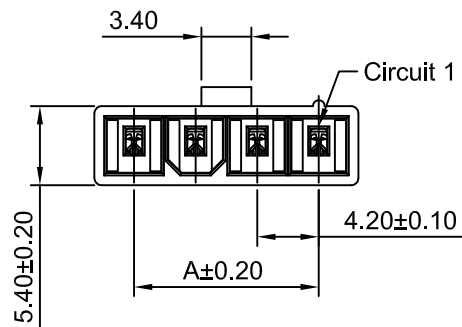


Ordering Information:

C4201WVA-XP - *** - ** - ***
1 2 3 4

1.Part No.

2.Material:

(blank):Nylon 66,UL94V-2

V0:Nylon 66,UL94V-0

GWT:Nylon 66,UL94V-0,GWT 750°C

3.Color:

(blank):Natural

WH:White

BK:Black

RD:Red

YL:Yellow

BL:Blue

4.Finish:


(blank):Tin over Nickel

G:Gold over Nickel(1u")

G3:Gold over Nickel(3u")

G15:Gold over Nickel(15u")

G30:Gold over Nickel(30u")



SPECIFICATIONS:

Current Rating: 11A AC,DC(Max)(Maximum current up to 11A when using the C4201F-TCA-HH series terminal)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL 94V-2(Natural)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C4201WVA-2P	4.20	9.60
C4201WVA-3P	8.40	13.80
C4201WVA-4P	12.60	18.00
C4201WVA-5P	16.80	22.20
C4201WVA-6P	21.00	26.40



CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale	Sheet	TITLE
mm		2:1	1 of 1	
DRAWN	CHK'D	APPR		
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances				DRAWING NO.
THIRD ANGLE PROJECTION				
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°				
				
C4201WVA-XP				REV
A2				