
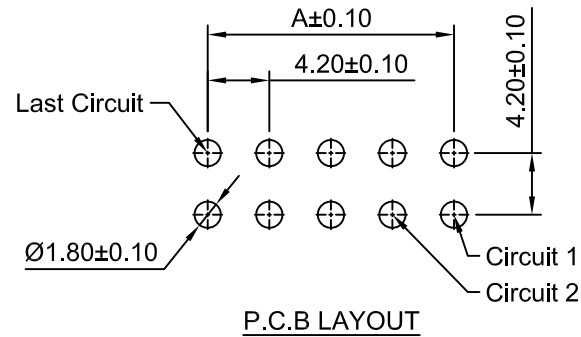
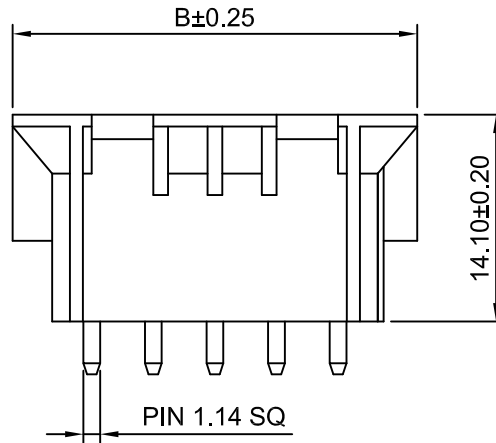


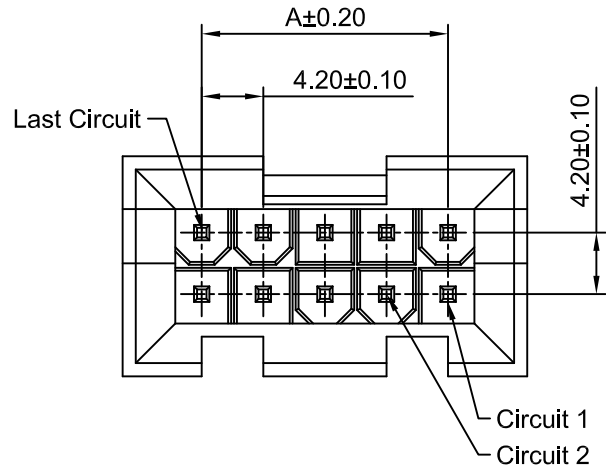

Ordering Information:

C4201WVC-2xXP - *** - ** - ***
1 2 3 4

1.Part No.

2.Material:

(Blank):Nylon 66 UL94V-2

V0:Nylon 66 UL94V-0

GWT:Nylon 66 UL94V-0,GWT 750°C

3.Color:

(Blank):Natural WH:White

BK:Black RD:Red

YL:Yellow BL:Blue

4.Finish:


(Blank):Tin over Nickel

G:Gold over Nickel(1u")

G3:Gold over Nickel(3u")

G15:Gold over Nickel(15u")

G30:Gold over Nickel(30u")

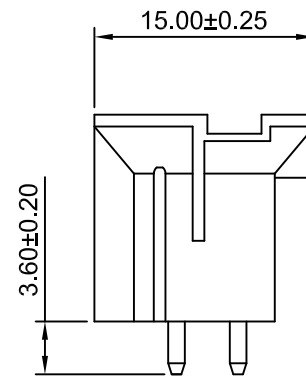

SPECIFICATIONS:

Current Rating: 13A AC,DC(Max)(Maximum current up to 13A when using the C4201F-TCA-HH series terminal)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

Material: Nylon 66,UL94V-2

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x1P	-----	10.80	2x8P	29.40	40.20
2x2P	4.20	15.00	2x9P	33.60	44.40
2x3P	8.40	19.20	2x10P	37.80	48.60
2x4P	12.60	23.40	2x11P	42.00	52.80
2x5P	16.80	27.60	2x12P	46.20	57.00
2x6P	21.00	31.80	2x18P	71.40	82.20
2x7P	25.20	36.00			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	2:1	1 of 1	4.20mm PITCH VERTICAL DUAL ROW WAFER		
DRWN	CHK'D	APPR			
Wenmin Luo	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			C4201WVC-2xXP		A1

A1	MODIFY DRAWING	2022.02.28
A0	NEW RELEASE	2018.06.25
REV	DESCRIPTION	DATE