

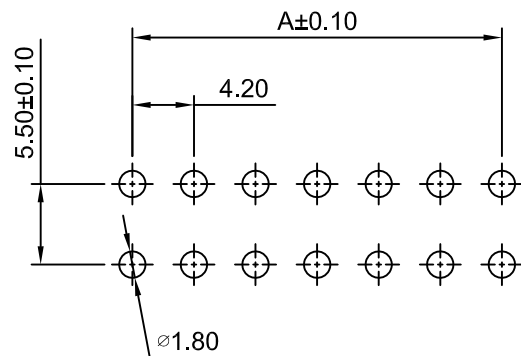
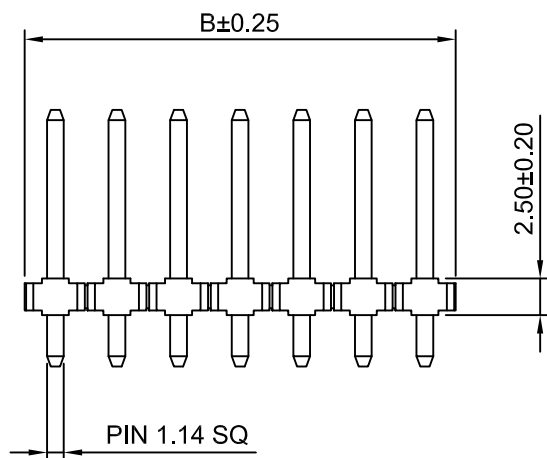


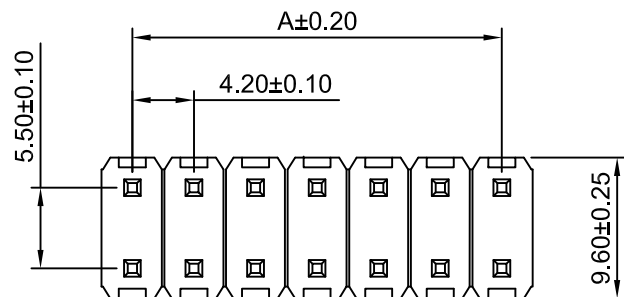

P.C.B LAYOUT
TOLERANCE:±0.05

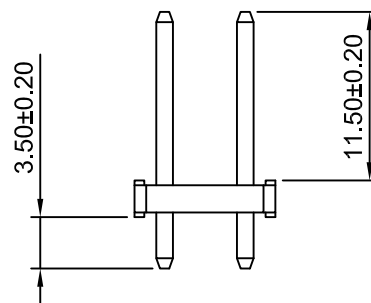

Ordering Information:

C4201WVFA-2xXP - ***
1 2

1.Part NO.

2.Finish:

(blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 9A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material:BrassI

Material: Nylon 9T,UL94V-0 (Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C4201WVFA-2x1P	---	4.20
C4201WVFA-2x2P	4.20	8.40
C4201WVFA-2x3P	8.40	12.60
C4201WVFA-2x4P	12.60	16.80
C4201WVFA-2x5P	16.80	21.00
C4201WVFA-2x6P	21.00	25.20
C4201WVFA-2x7P	25.20	29.40
C4201WVFA-2x8P	29.40	33.60
C4201WVFA-2x9P	33.60	37.80
C4201WVFA-2x10P	37.80	42.00
C4201WVFA-2x11P	42.00	46.20
C4201WVFA-2x12P	46.20	50.40

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1		
DRWN	CHK'D	APPR	4.20x5.50mm PITCH 180° DUAL ROW DIP WAFER	
Dengchun Yi	Dlankul Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			C4201WVFA-2xXP	A0

A0	NEW RELEASE	2020.09.10
REV	DESCRIPTION	DATE